

05-E001-54-CM

V0

Tron Wall fixture



Description

Lineal systems



For uplighting.. Suitable for installation in marine environments. Includes 2 cable outlets to facilitate chain mounting. Adjustable light source. Structure material: Extruded aluminium. Structure finish: Anodized. Diffuser material: Glass. Diffuser finish: Transparent. UV protection. Warranty: 2 Years.

Finish

Anodized
Transparent

Material

Extruded aluminium
Glass



TECHNICAL CHARACTERISTICS

Light source

Light source: LED CREE
Output (W): 24 W
Color temperature: Neutral white - 4000K
CRI: 80
Real Lumen: 2336
Nominal Lumen: 2900
Qty Leds: 14
Lm/Real W: 97
Life Time: 42.000h L90B10
Bin / Grup: 5A3 o 5D2
MacAdam steps: 3 STEPS
UGR: 15.5
Photobiological risk: RG1

GEAR

This item requires gear. It is not included.
Voltage / Frequency: 24 VDC





Luminaire

Double cable exit: Yes
Drainage: No
Seaside: Yes
Uv Protection: Yes
Warranty: 2 Years

Logistics

Energy Efficiency: LED A++
EAN Code: 8435381497712
Net Weight (Kg): 1.150
Weight in Kg (packaged): 1.593
Packing: - x - x -
Masterbox: 12

The photograph may not match the reference exactly. Please read the product description to identify the finish.

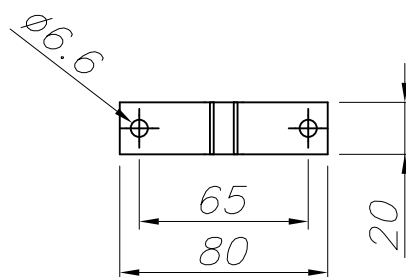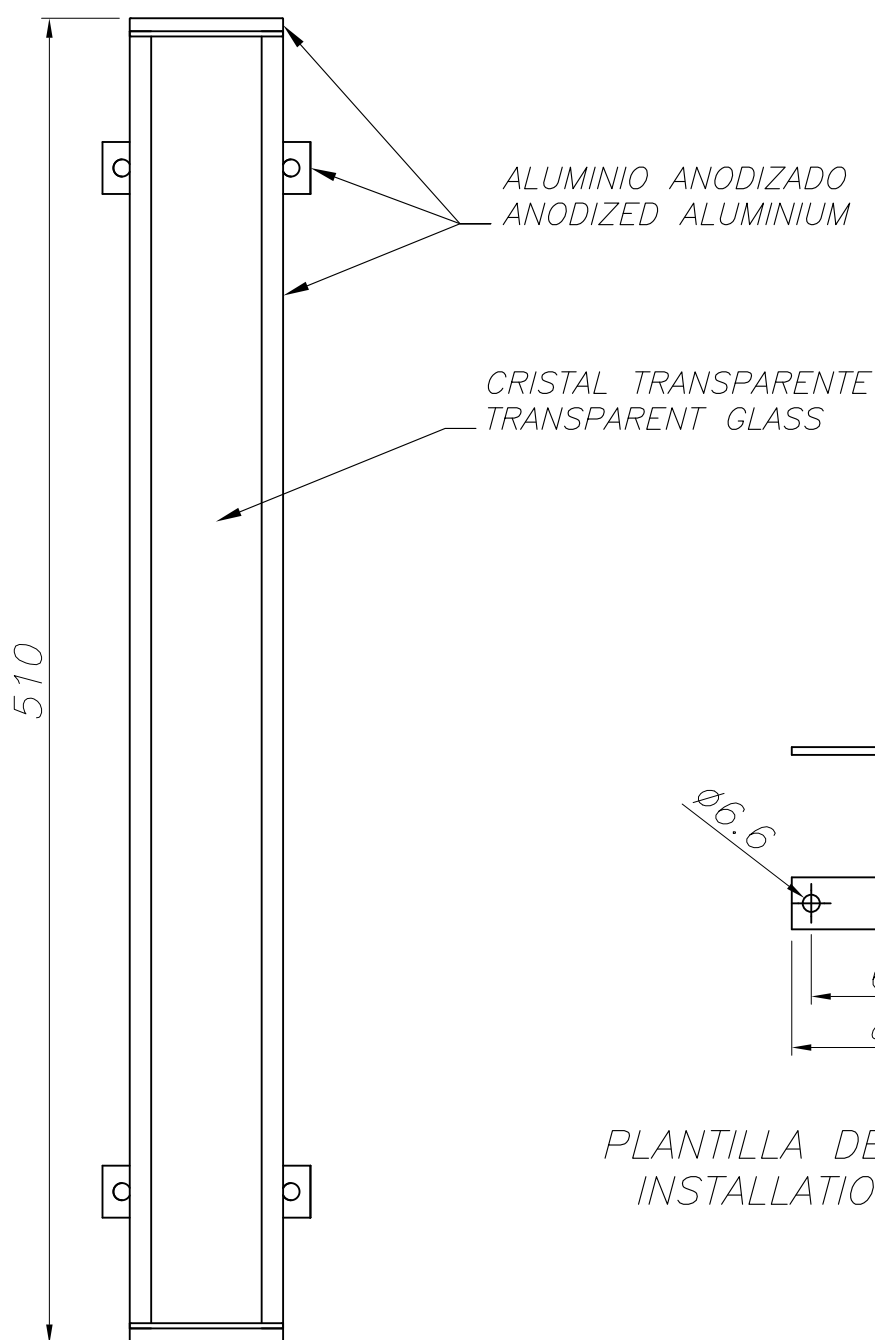

PLANTILLA DE INSTALACION
INSTALLATION TEMPLATE



GUIA INSTALACIÓN SERIE TRON
INSTALLATION GUIDE TRON SERIES
INSTALLATIONSANLEITUNG SERIE TRON
GUIDE D'INSTALLATION SÉRIE TRON
GUIDA DI INSTALLAZIONE SERIE TRON

05-E001-54-CL / 05-E003-54-CL - WARM WHITE









05-E001-54-CM / 05-E003-54-CM - NEUTRAL WHITE

05-E000-54-37 / 05-E002-54-37 - RGB

LED S-C4 S.A.
CIF A-59410910

Afores, s/n
25750 Torà · Lleida · Spain
T +34 973 46 81 00
F +34 973 46 81 06
e-mail: leds-c4@leds-c4.com

WWW.LEDS-C4.COM

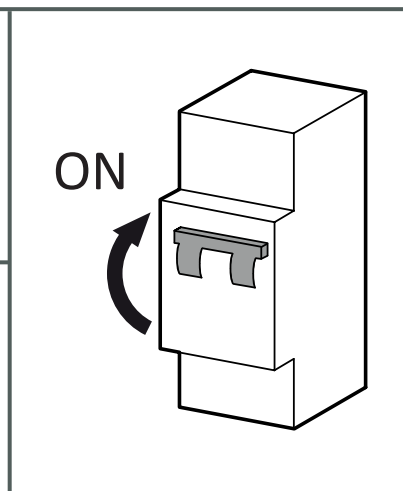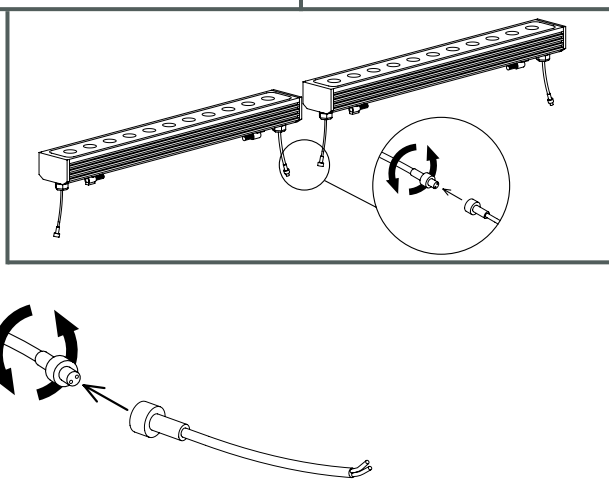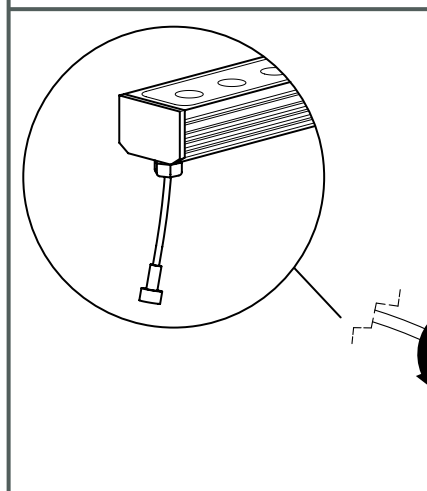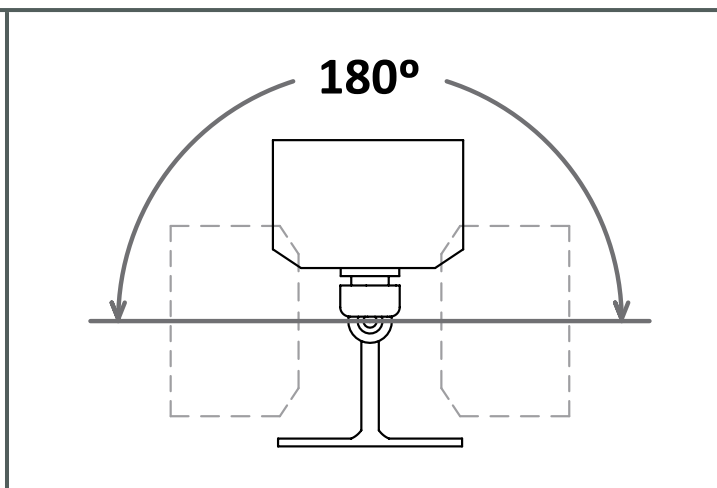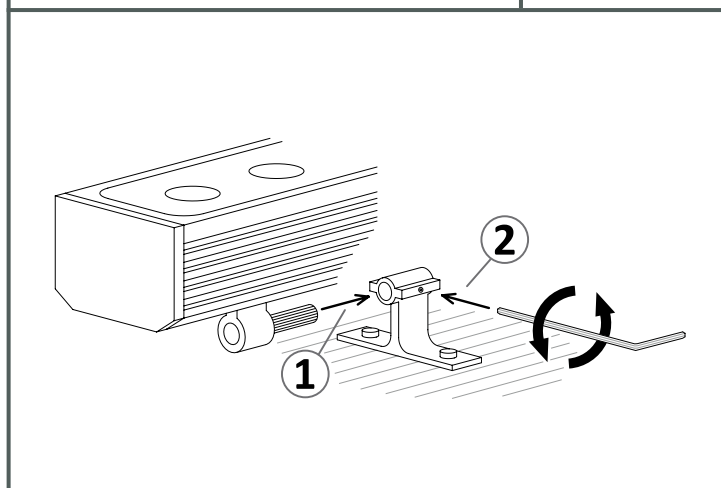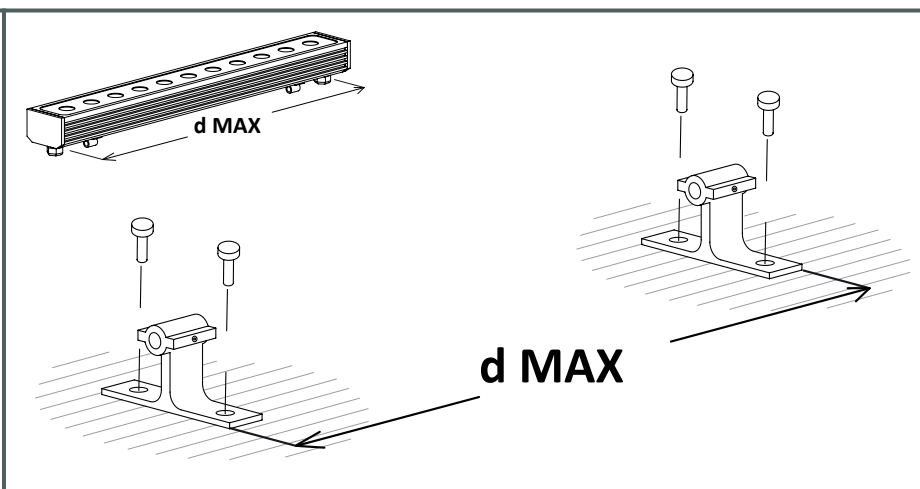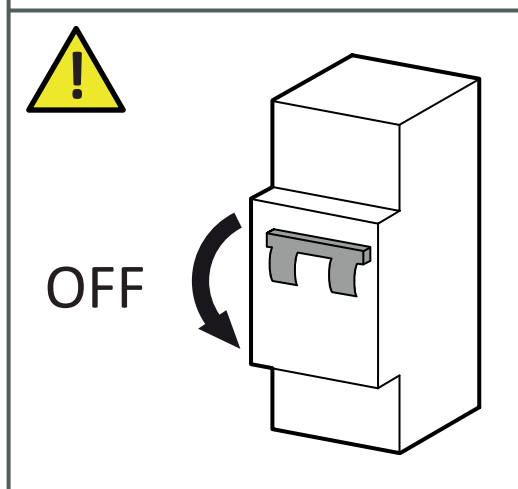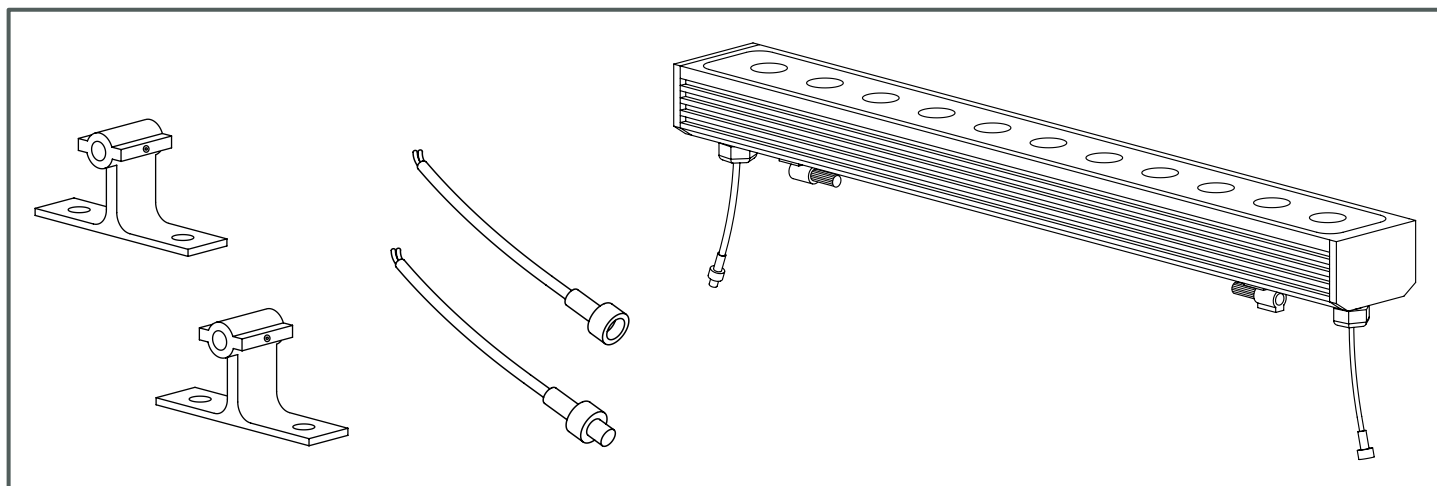



71-6339-00-00 - 35 W
71-6340-00-00 - 60 W
71-6341-00-00 - 100 W (IP67)
71-6343-00-00 - 150 W
71-4727-00-00 - 150 W (IP67)
71-6345-00-00 - 240 W (IP67)
71-6346-00-00 - 320 W (IP67)



71-3473-00-00 - 120 W



71-3493-00-00
- 4x48W (R,G,B,W)
- 3x48W (R,G,B)



71-0017-00-00 - 288 W



71-0019-00-00 - 432 W



71-1553-00-00 - 384W



71-0727-00-00 - 312 W




71-4662-00-00 - 432 W
71-4663-00-00 - 432 W (IP65)
71-4666-00-00 - REMOTE (OPTIONAL)

WHITE


05-E001-54-CL / 05-E001-54-CM (0,5 m - 24W)

05-E003-54-CL / 05-E003-54-CM (1,0 m - 48W)


ON / OFF

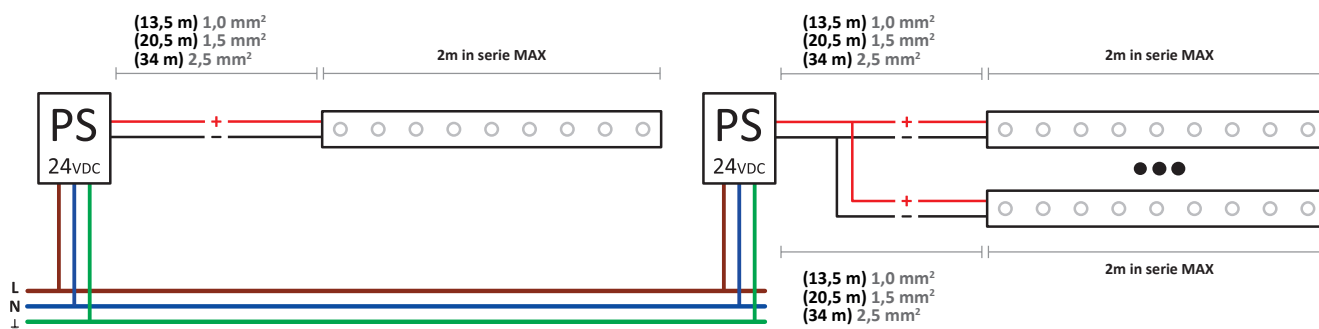


DIMMING WITH REMOTE CONTROL

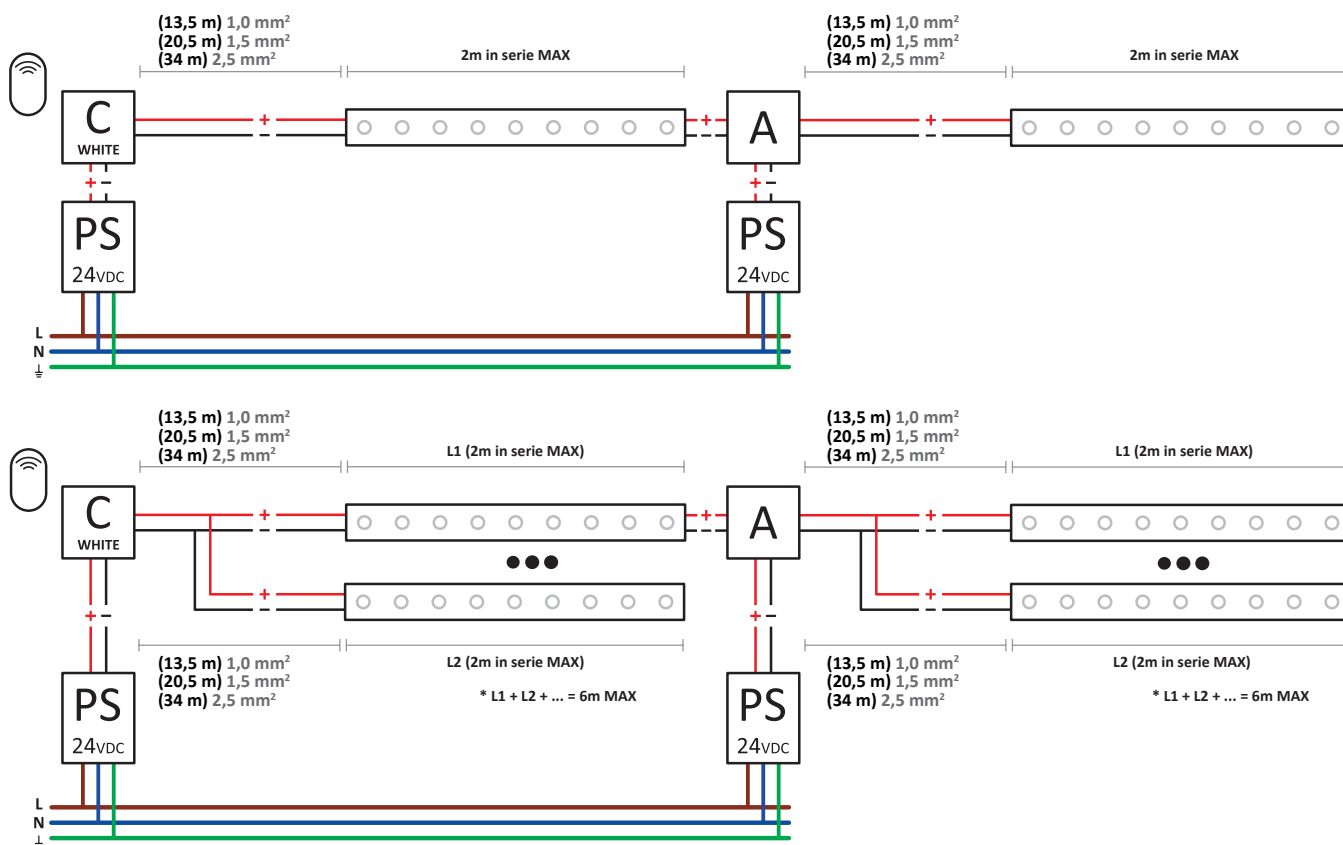

1-10V

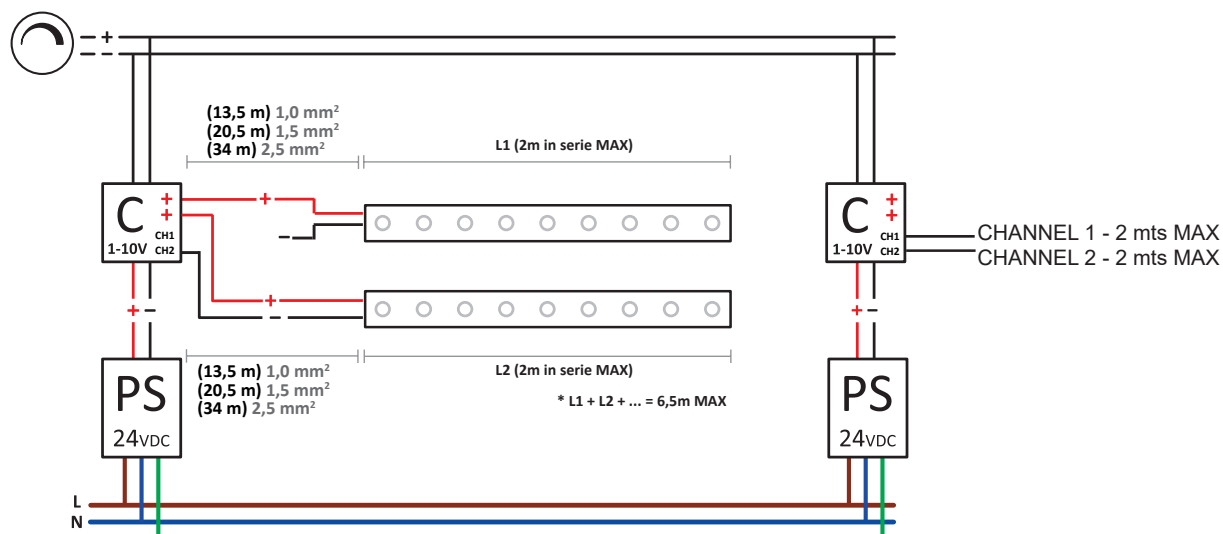

DALI

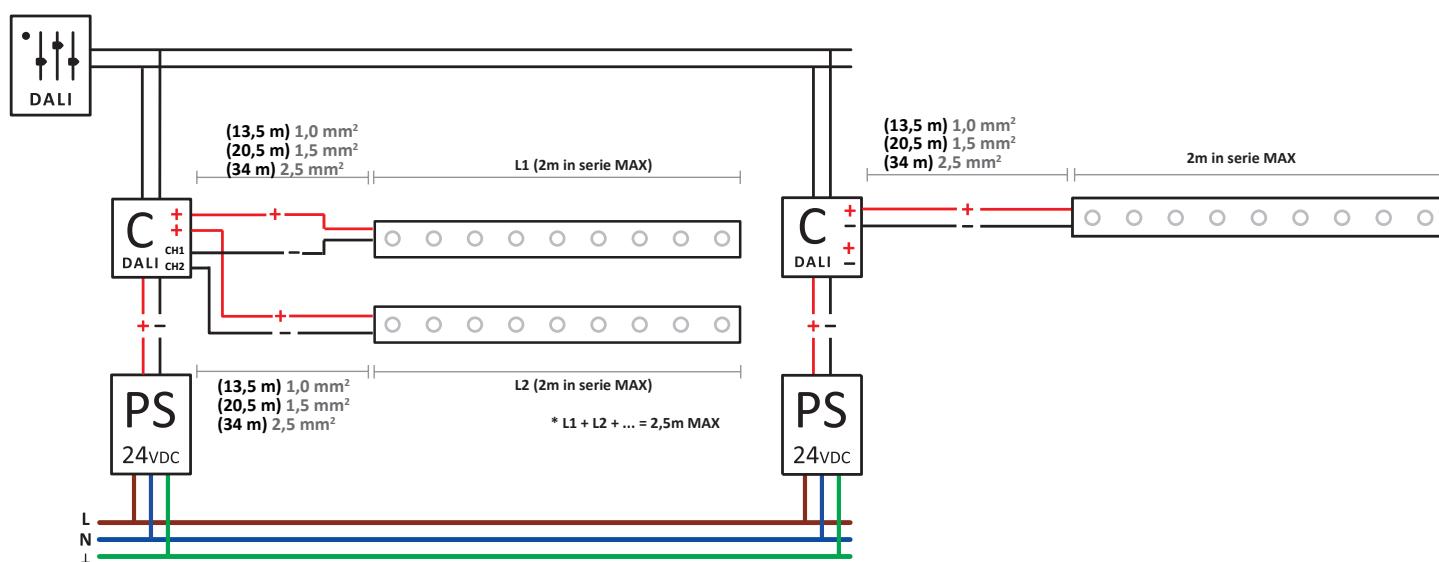



RGB

05-E000-54-37 (0,5 m - 30W)

05-E002-54-37 (1,0 m - 60W)

RGB CONTROL WITH / WITHOUT REMOTE CONTROL

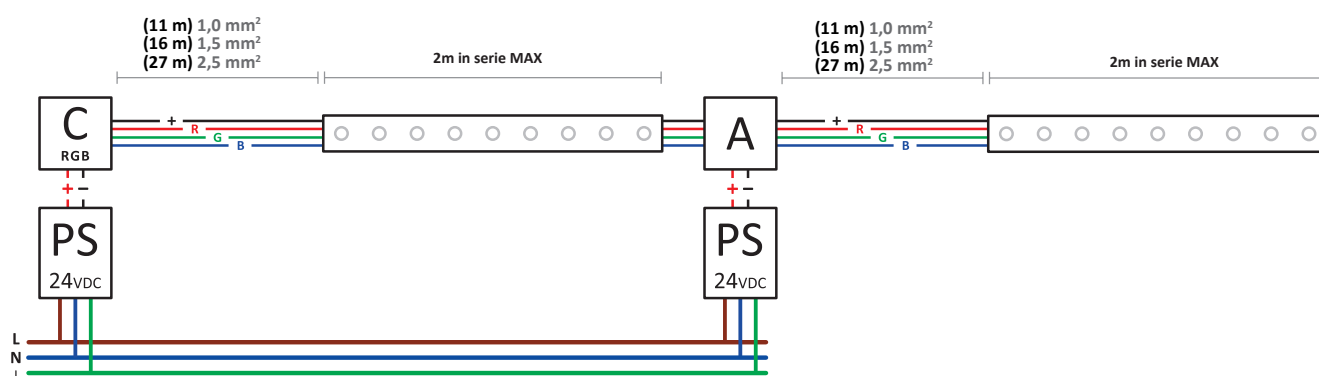

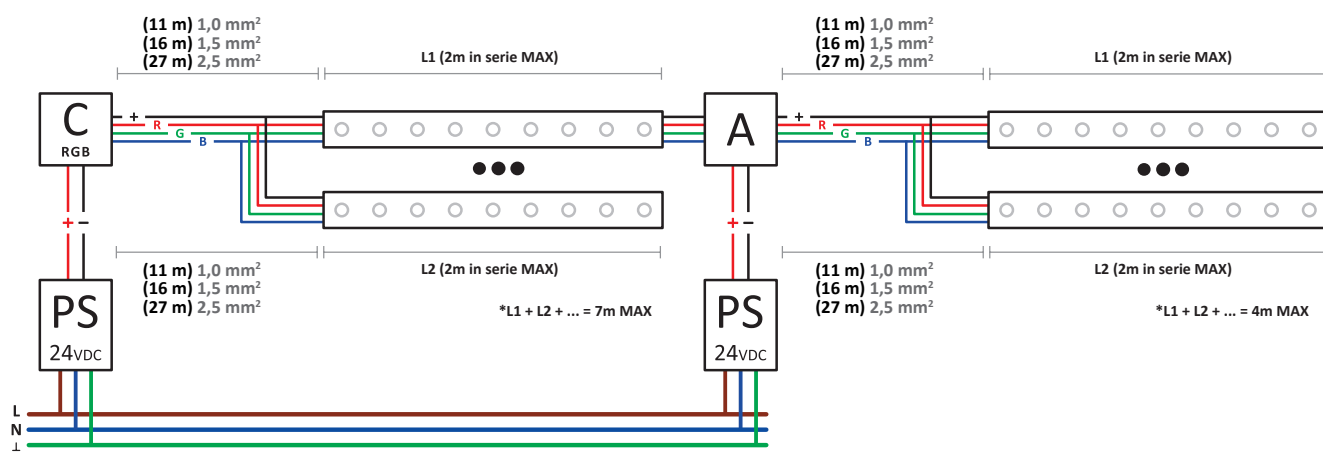

DMX

