

product specifications

style name	inspire
style number	0884V
construction	commercial luxury vinyl tile
class / ASTM F1700	class III printed film vinyl tile, type B (embossed)
nominal dimensions	12 in wide, 24 in long

	US units	metric units
wear layer thickness	0.020 in	20 mil (0.5 mm)
overall thickness	0.098 in	2.5 mm
actual width	12.0 in	30.48 cm
actual length	24.0 in	60.96 cm
backing class	commercial grade	
finish	ExoGuard+™	
installation	glue down	
recommended adhesive	Shaw 4100 or S150	

packaging

square feet per carton	36.0
pieces per carton	18
weight per carton	32.4 lbs


testing

slip resistance	(ASTM D2047) passes
static load	(ASTM F970) passes, modified 2000 psi
residual indentation	(ASTM F1914) passes
flexibility	(ASTM F137) passes
resistance to heat	(ASTM F1514) passes
resistance to light	(ASTM F1515) passes
resistance to chemicals	(ASTM F925) passes
radiant panel	(ASTM E648) Class 1
nbs smoke	(ASTM E662) <450

warranty

limited lifetime commercial
10 year underbed when installed with Shaw 4100 or S150
Please visit www.shawcontract.com for the most current warranty information.

installation methods

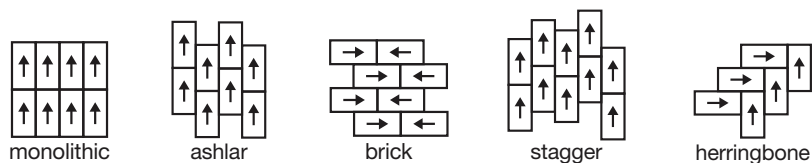

environmental

indoor air quality FloorScore® certified



Specifications are subject to nominal manufacturing variance.
Material supply and/or manufacturing processes may necessitate changes without notice