Specification Sheet

lumenfacade™

INGROUND
LEADER CABLE
WHITE & STATIC COLORS,
COLOR CHANGING &
DYNAMIC WHITE

Client _____   **Project name** _____

**Order#** _____ **Type** _____ **Qty** _____

LEADER CABLE, LTW CONNECTOR

Physical :
- Available in 10', 25' or 50' lengths
- Available in 3m, 7.6m or 15.2m lengths
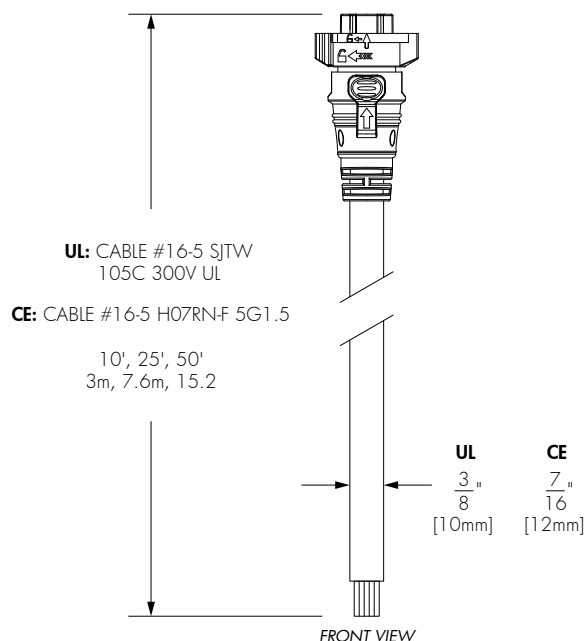- Black cable and connectors standard
- IP68

Electrical :
- Power and data in 1 cable (#16-5)
- Suitable for dimming/data and non-dimming applications

**Connection Type:
Standard**

Pin ID	American Color Code	CE Color Code	USE
1	Red	Black	0-10V / Data +
2	Orange	Grey	0-10V / Data -
3	Black	Brown	Live 100-277V
4	Green	Yellow/Green	Ground
5	White	Blue	Neutral

**Connection Type:
Standard**

$1\frac{7}{16}$"
[36mm]

Female pin

TOP VIEW

UL: CABLE #16-5 SJTW
105C 300V UL

CE: CABLE #16-5 H07RN-F 5G1.5

10', 25', 50'
3m, 7.6m, 15.2

UL	CE
$\frac{3}{8}$"	$\frac{7}{16}$"
[10mm]	[12mm]

FRONT VIEW

1.877.937.3003
P. 514.937.3003
F. 514.937.6289
info@lumenpulse.com
www.lumenpulsegroup.com

5-year limited warranty.

Consult www.lumenpulsegroup.com
for our complete Standard Terms
and Conditions of Sales.

lumenpulse™
GROUP

Lumenpulse reserves the right to make changes to this product at any time
without prior notice and such modification shall be effective immediately.

Specification Sheet

lumenfacade™

INGROUND
LEADER CABLE
WHITE & STATIC COLORS,
COLOR CHANGING &
DYNAMIC WHITE

HOW TO ORDER

LOILC

| 1 | 2 | 3 |

---

1 | Housing:

LOILC - Leader cable for Lumenfacade™ Inground

---

2 | Certification:

UL - UL (certification covers Canada and the United States)
CE - CE (certification covers European Economic Area)

---

3 | Length:

10FT - 10ft	**3M -** 3m
25FT - 25ft	**7.6M -** 7.6m
50FT - 50ft	**15.2M -** 15.2m

5-year limited warranty.

Consult www.lumenpulsegroup.com
for our complete Standard Terms
and Conditions of Sales.

lumenpulse™
GROUP