

Client _____ Project name _____

Order# _____ Type _____ Qty _____

LEADER CABLE, WIELAND CONNECTOR


Physical :

- Available in 10', 25', 50', 100', 150' or 150" lengths, custom lengths available, consult factory
- Available in 3m, 7.6m, 15.2m, 30m, 45m or 61m lengths, custom lengths available, consult factory
- Available in black or white, consult factory for custom colors

Electrical :



- Power in 1 cable (#16-3, non-dimming applications)
- Power and data in 1 cable (#16-5, dimming/data applications)

Dimming/data and non-dimming version

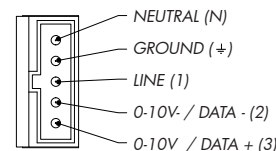

Pin ID	American Color Code	CE Color Code	USE
\perp	Green	Yellow/Green	Ground
N	White	Blue	Neutral
1	Black	Brown	Live 120-277V
2	Orange	Grey	0-10V - / Data -
3	Red	Black	0-10V + / Data +

Connection Type: Standard (dimming/data and non-dimming)

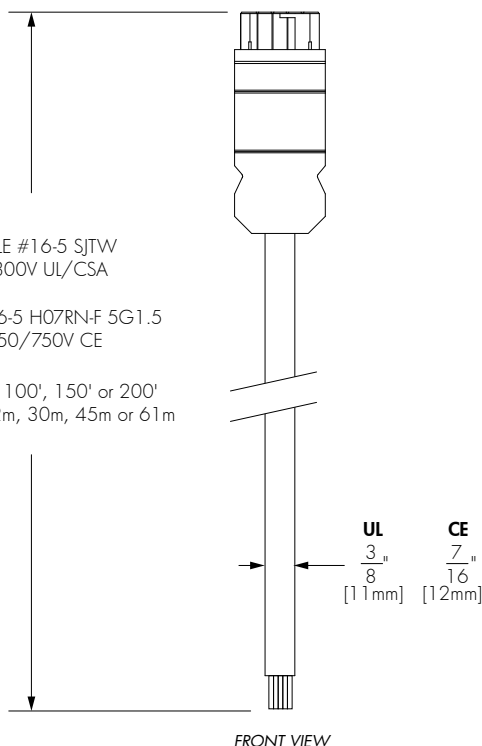

UL: CABLE #16-5 SJTW
105C 300V UL/CSA

CE: CABLE #16-5 H07RN-F 5G1.5
85C 450/750V CE

10', 25', 50', 100', 150' or 200'
3m, 7.6m, 15.2m, 30m, 45m or 61m

UL $\frac{3}{8}$ " [11mm] CE $\frac{7}{16}$ " [12mm]



HOW TO ORDER

LOGiLC				
1	2	3	4	5

1

Housing:

LOGiLC - Leader cable for lumenfacade™ Interior

2

Certification:

UL - UL (certification covers Canada and the United States)

CE - CE (certification covers Europe Economic Area)

3

Control:

NO - Non-dimming

DATA - Dimming/data

4

Length:

10FT - 10ft

25FT - 25ft

50FT - 50ft

100FT - 100ft

150FT - 150ft

200FT - 200ft

3M - 3m

7.6M - 7.6m

15.2M - 15.2m

30M - 30m

45M - 45m

61M - 61m

Custom lengths available, consult factory.

5

Cable Color:

BK - Black (black connector)

WH - White (white connector)

Consult factory for custom color availability.