


Project Name


Qty

Type

Catalog / Part Number

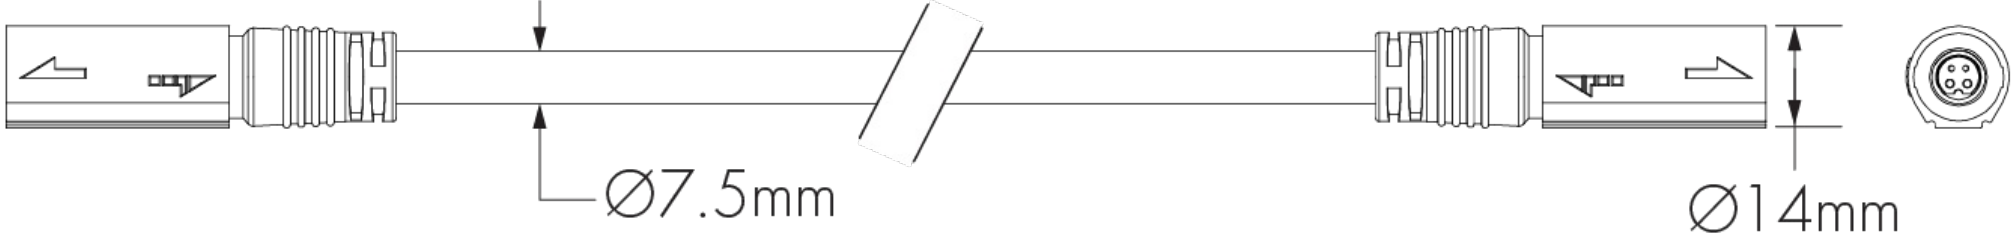

UL

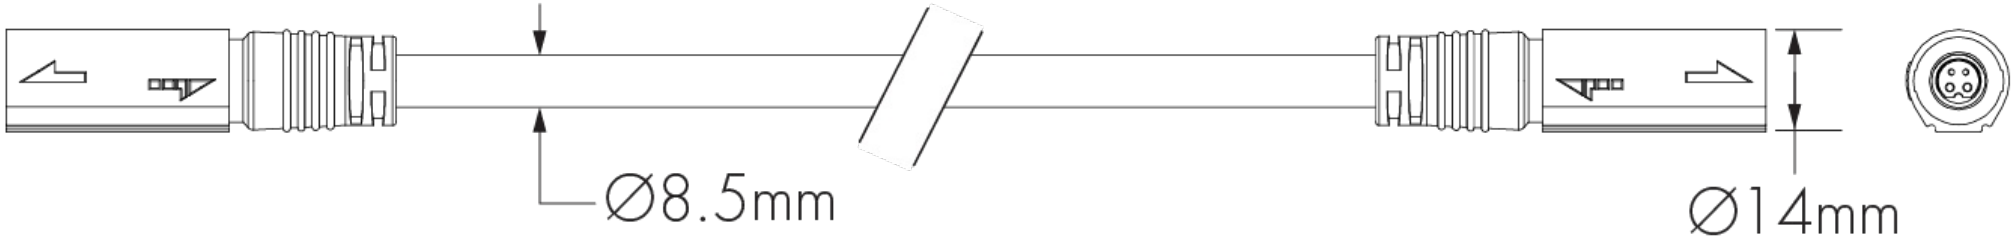

CE

Rating

Features	
Length	0.2 m, 0.3 m, 0.6 m, 0.9 m, 1.2 m, 1.5 m, 1.8 m, 2.1 m, 2.4 m, 2.7 m, 3 m, 3.4 m, 3.7 m, 4 m, 4.3 m, 4.6 m, 4.9 m, 5.2 m, 5.5 m, 5.8 m, 6.1 m, 6.4 m, 6.7 m, 7 m, 7.3 m, 7.6 m, 7.9 m, 8.2 m, 8.5 m, 8.8 m, 9.1 m, 15.2 m
Cable Colour	Black, White
Options	Master
Warranty	5-year limited warranty
Electrical and control	
Voltage	300 volts
Connectors	Female connector, female pins
Conductors	One pair 24 AWG (0.2mm²) and two conductors 18 AWG (0.75mm²)
Environmental	
Operating Temperature	UL: up to 80 °C, CE: up to 105 °C
IP Rating	IP66

How to order				
1	2	3	4	5

1 . Housing	
LOGNJC	Lumenfacade™ Nano Jumper Cable

2 . Certification	
UL	UL compliant
CE	CE compliant

3 . Length	
0.5FT	0.2 m ⁽¹⁾
1FT	0.3 m
2FT	0.6 m
3FT	0.9 m
4FT	1.2 m
5FT	1.5 m
6FT	1.8 m
7FT	2.1 m
8FT	2.4 m
9FT	2.7 m
10FT	3 m
11FT	3.4 m
12FT	3.7 m
13FT	4 m
14FT	4.3 m
15FT	4.6 m
16FT	4.9 m
17FT	5.2 m
18FT	5.5 m
19FT	5.8 m
20FT	6.1 m
21FT	6.4 m
22FT	6.7 m
23FT	7 m
24FT	7.3 m
25FT	7.6 m
26FT	7.9 m
27FT	8.2 m
28FT	8.5 m
29FT	8.8 m
30FT	9.1 m
50FT	15.2 m

4 . Cable Colour ⁽²⁾	
BK	Black
WH	White

5 . Options	
M	Master ⁽³⁾

Notes:

⁽¹⁾ Available for Lumenfacade Nano Interior and Lumenfacade Nano Horizontal Interior models only.

⁽²⁾ Connectors are the same colour as the specified cable colour.

⁽³⁾ To identify the jumper cable connecting the LCBX or LSBX to the first Lumenfacade Nano fixture, specify the Master option when ordering master jumper cables. The Master option does not need to be specified for jumper cables connecting Lumenfacade Nano fixtures together.