



PROJECT INFORMATION

PROJECT


TYPE

QUANTITY

NOTES


<http://barbican.ca/product/northern-frost-cylinder-tubular/>
product code #16-6801

this spec sheet was generated on Feb 12th 2019

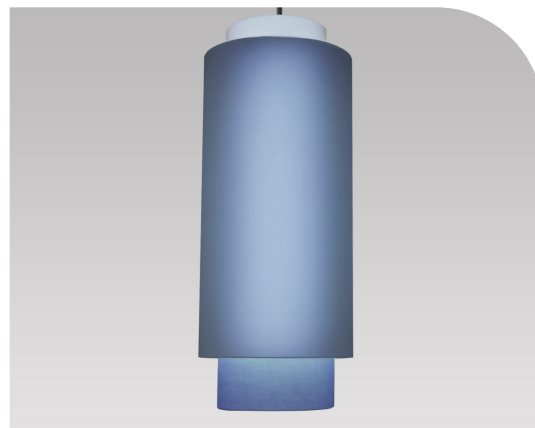

Encased in our standard Northern Frost material for the outer "frosted" diffuser shade, it creates the look of light captured by crystals. Due to the slight opacity of the frosted outer material, printing is not a standard option for the Northern Frost Collection, but you can choose from more than 45 laminated fabric colours for the inner shade. Make a metropolis in the sky. Choose from a wide array of colours to make your own material world.

Please note that measurements are based on the inner dimensions. Material and Diffuser options refer to the inner shade only. Standard inner diffuser is opal. The Finish selection applies to the canopy and stem (if applicable). The Shade Material refers to the options available on the shade of the cylinder.

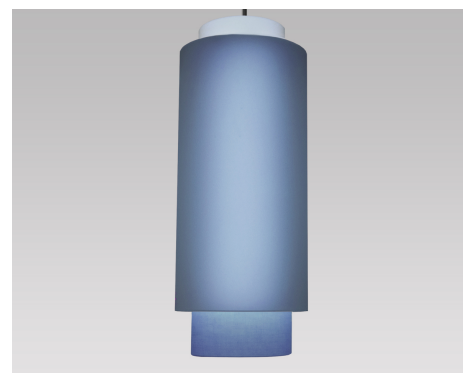

Please note that not all of the above product configurations have been built. Products and lead times may vary. Specifications subject to change without notice. Please visit barbican.ca for the most current specifications and to build part numbers.

1-800-663-5781
barbican.ca



<http://barbican.ca/product/northern-frost-cylinder-tubular/>
product code #16-6801

this spec sheet was generated on Feb 12th 2019

Build Your Product Code

#16-6801

Code	Diameter		Height	
This is the primary product code for the Northern Frost Tubular.	12D	12"	28H	28"
	16D	16"	40H	40"
	18D	18"		

Material	Mounting		Finish	
Pick from our large collection of over 1000 materials	ACB	Aircraft Cable BLACK	STDFIN	Standard
	ACW	Aircraft Cable WHITE	WHT	White
	SM	Stem Mount	BA	Brushed Aluminum
			RAL	RAL
			CUSTF	Custom

Source		Voltage		Temperature	
9W/LF	9W per linear foot (50 LPW) - Standard	120V	120 Volts	3000K	3000 °K
18W/LF	18W per linear foot (50 LPW)	277V	277 Volts	2700K	2700 °K
				3500K	3500 °K
				4000K	4000 °K

Colour Rendering Index		Dimming Drivers	
90CRI	90 CRI	Dimming Drivers	Conditional Voltage
		DB(0-10V)	120 Volts, 277 Volts



Please note that not all of the above product configurations have been built. Products and lead times may vary. Specifications subject to change without notice. Please visit barbican.ca for the most current specifications and to build part numbers.

1-800-663-5781
barbican.ca



<http://barbican.ca/product/northern-frost-cylinder-tubular/>
 product code #16-6801
 this spec sheet was generated on Feb 12th 2019

Feature Descriptors

Material	Finish	Source	Voltage
Open the material palette.	Finish applies to the canopy and, if applicable, the stem. Standard options include white and brushed aluminum (for TBA, choose "Standard"). All other options are premium, additional charges apply.	Standard LED is 50 Lumens per watt. High Output (HO) LED - is 100 lumens per watt. RGB is available, please contact Barbican. Please note if lumens are shown, they are delivered and approximate. Other lumen packages are available. Driver loss is not included in the Nominal LED Wattage.	120 and 277 are standard options
Temperature	Colour Rendering Index	Dimming Drivers	
Colour temperature is a description of the warmth or coolness of a light source. It is a characteristic of visible light and is stated in units of absolute temperature, known as Kelvin (K).	A colour rendering index (CRI) is a quantitative measure of the ability of a light source to reveal the colours of various objects faithfully in comparison with an ideal or natural light source.	Sensor Ready and Integrated controls, as well as proprietary drivers can be added to Barbican fixtures. Please consult Barbican for availability of these options for this fixture.	





<http://barbican.ca/product/northern-frost-cylinder-tubular/>
product code #16-6801

this spec sheet was generated on Feb 12th 2019

