


SHINGLE

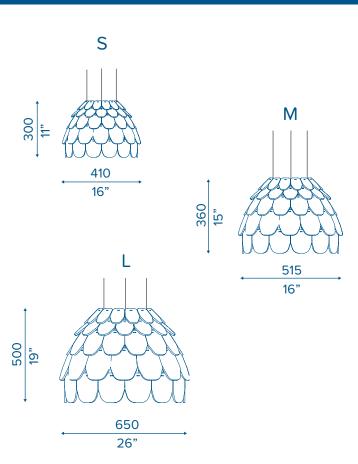

Shingle forms part of Luxxbox's decorative pendant series made from acoustically rated panels. Designed to add a decorative element to the space whilst functioning as a tool for sound management.

KEY FEATURES

- Available in three sizes
- Shade available in a large range of colours
- Effective sound absorption
- E27 lampholder
- 3 suspension cables, height adjustable
- Suitable for indoor environments
- Group 1-S fire rated
- Minimum 65% recycled material
- IES files available

HOW TO SPECIFY

LX-SI = (Size) - (Colour)

Size	Shade Colour
S = dia 410mm x 300mm H	
M = dia 515mm x 360mm H	Specify colour as above
L = dia 650mm x 500mm H	-

Example: LX-SI-S-DB- = Luxxbox Shingle, small, dark blue

Standard Range



white (W)













light blue (LB)







Premium Range A




















LUXXBOX PTY LTD imes ACN 123 193 788 imes 43 KENYON ST EAGLE FARM QLD 4009 AUSTRALIA




SHINGLE SUSPENSION LOCATIONS

CANOPY LOCATIONS

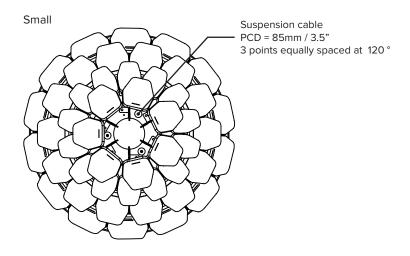




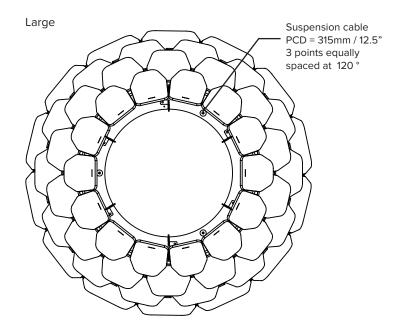



SHINGLE - INSTALLATION

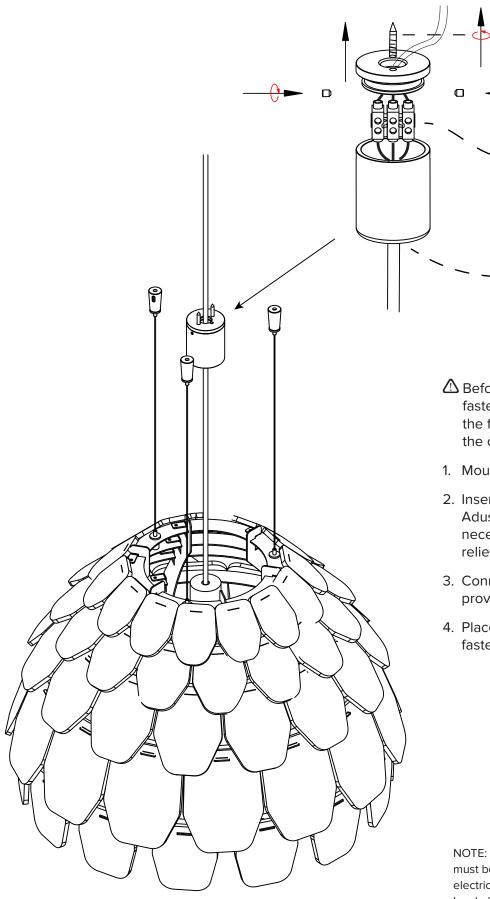


⚠ Before starting, determine which fasteners will be best suited to secure the fitting, based on the material of the ceiling substrate.

- 1. Mount canopy base to ceiling
- Insert power cable into canopy cover. Adust lengths of cable and trim if necessary. Fasten power cable strain relief grub screw
- 3. Connect line voltage to terminals provided
- 4. Place canopy over canopy mount and fasten 2x grub screws


NOTE: Line voltage fittings must be installed by a qualified electrician, in accordance with local electrical laws



SHINGLE - BOTTOM ROW ASSEMBLY

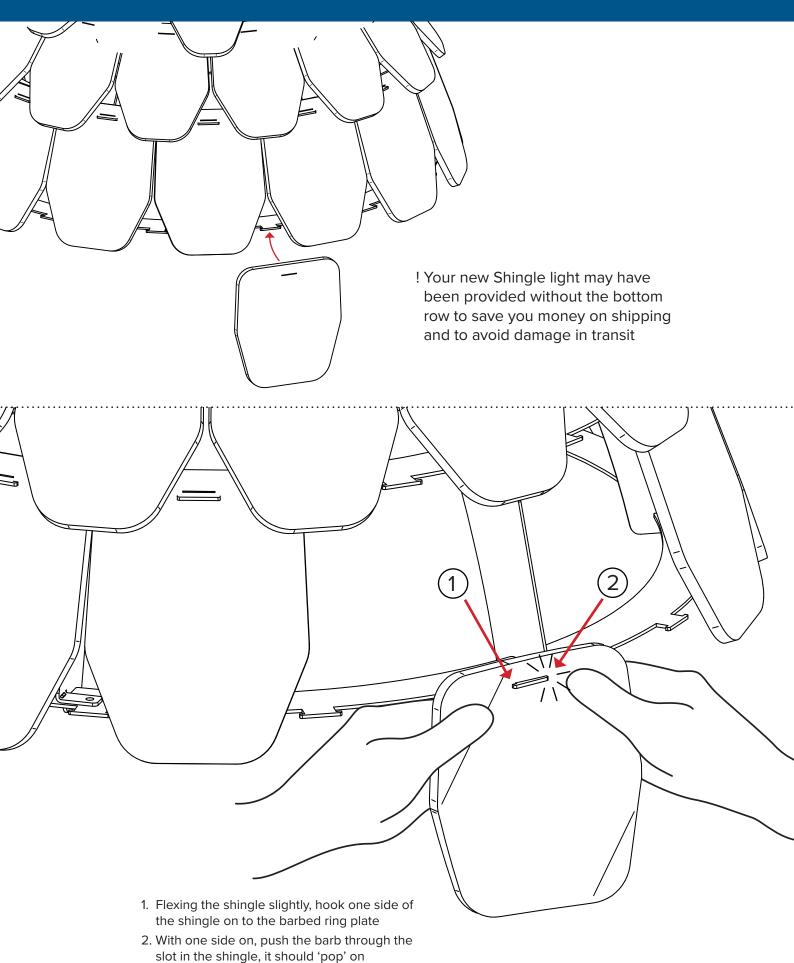






P +1 (415) 871 0448 × USA@LUXXBOX.COM



SHINGLE - BOTTOM ROW ASSEMBLY

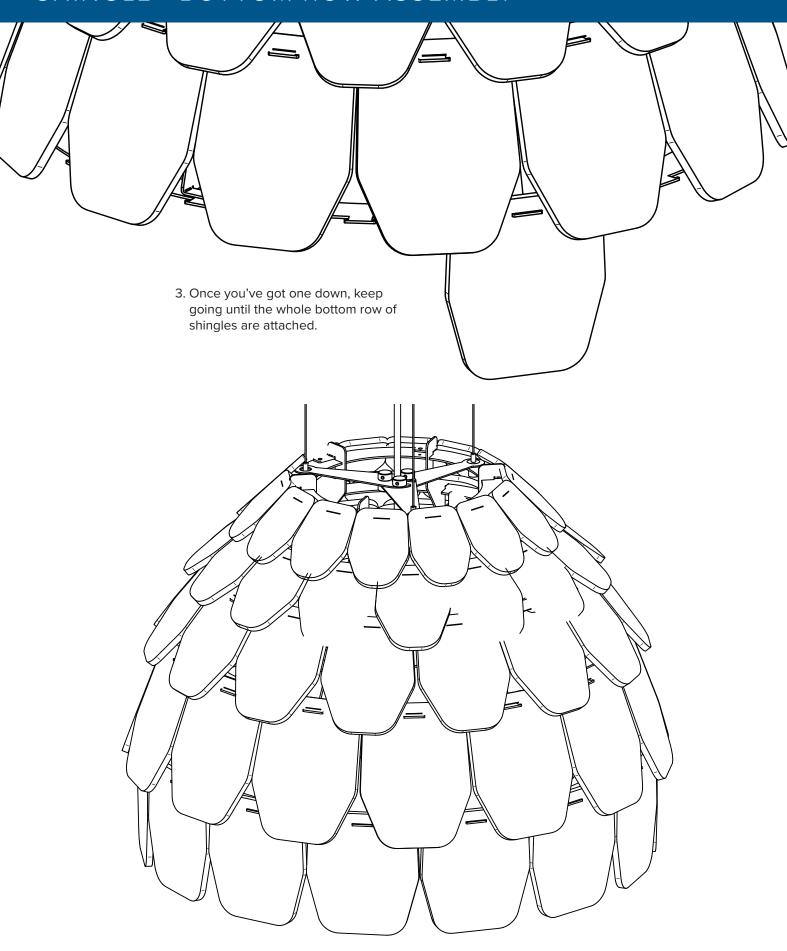






P +1 (415) 871 0448 × USA@LUXXBOX.COM




STANDARD CEILING MOUNT - INSTALLATION

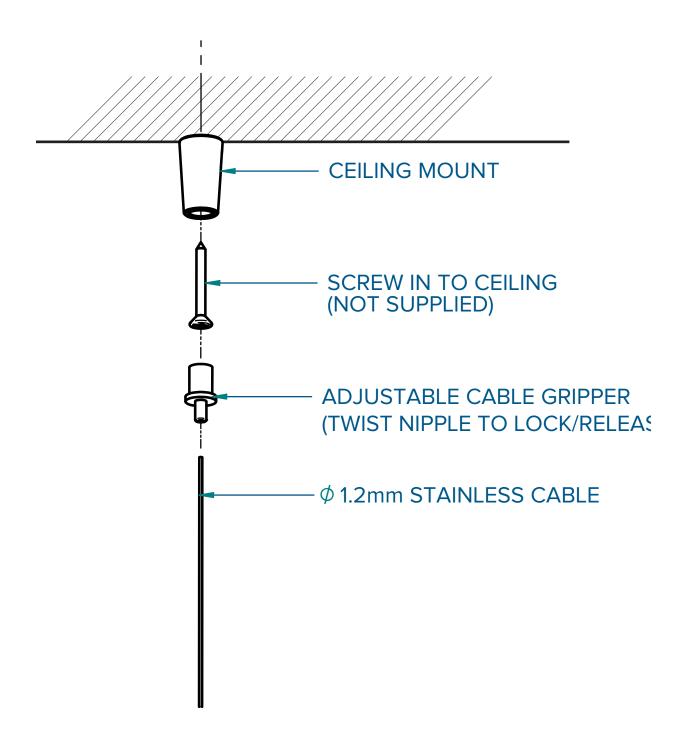



STANDARD CEILING MOUNT - INSTALLATION

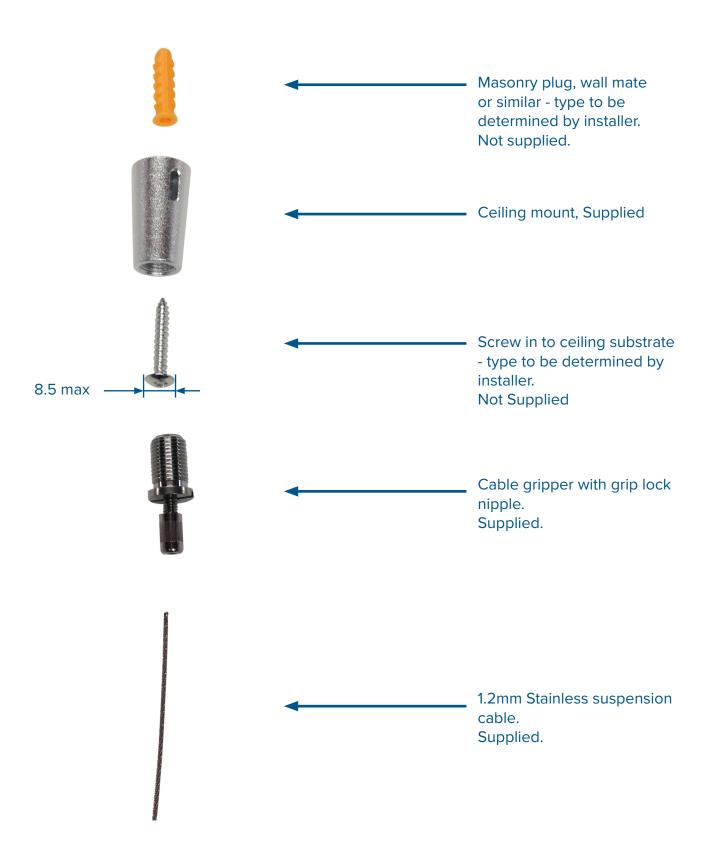



STANDARD CEILING MOUNT - INSTALLATION



