



# QUARRY NATURALS®

QUARRY FLOOR

FLOOR



AMERICAN OLEAN®  
PROVEN IN TILE™

[AMERICANOLEAN.COM](http://AMERICANOLEAN.COM)



The background of the entire page is a photograph of a floor made of large, square, tan-colored tiles with a slightly textured, hand-crafted appearance. The tiles are separated by light-colored, recessed grout lines that form a grid pattern. In the top right corner, a portion of a wicker chair is visible, and a trailing ivy plant with green leaves is growing along the edge of the floor. A large, semi-transparent blue circle is overlaid on the left side of the image, containing the brand name and descriptive text.

# QUARRY NATURALS®

Quarry Naturals lets you choose from a group of solid colors or slightly-striated, visually-textured "flash" surfaces, all with a natural, hand-crafted look. Durable and long-wearing, Quarry Naturals' slip-resistant cushioned edge and unglazed surface make it eminently suitable for outdoor patio and pool areas as well as floors and walls.

Cover and above photo feature Quarry Naturals Desert 8 x 8 on the floor.



# QUARRY NATURALS®

QUARRY FLOOR

## FLOOR TILE

---




SHADOW GRAY N46 \* (2)




DESERT N03 \* (1)




LAVA RED N01 \* (1)




SHADOW FLASH N56 (2)



PRAIRIE FLASH N04 (1)



FIRE FLASH N02 (1)

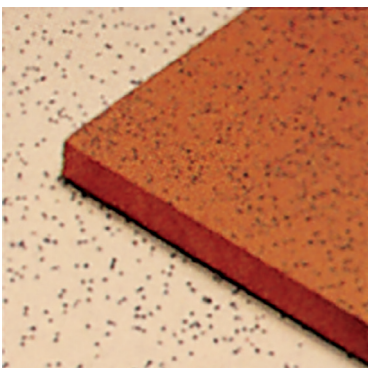

ABRASIVE GRAIN

### \* SPECIAL SURFACES:

Abrasive grain available in N01, N03 and N46 in 6 x 6 and 8 x 8 sizes.




Abrasive grain particles added to Quarry Naturals give improved slip resistance for many types of footwear, depending on maintenance conditions.

(1) & (2) notations indicate price group, (1) being the least expensive.









# QUARRY NATURALS®

## QUARRY FLOOR

### SIZES

			THICKNESS	SQ. FT./ CARTON	PIECES/ CARTON
	8 x 8 Floor Tile	8" x 8" (20.30 cm x 20.30 cm)	1/2"	11.11	25
	6 x 6 Floor Tile	6" x 6" (15.20 cm x 15.20 cm)	1/2"	11.00	44
	3-7/8 x 8 Floor Tile	3-7/8" x 8" (9.80 cm x 20.30 cm)	1/2"	10.76	50

### TRIM

			NUMBER	PIECES/ CARTON
	Floor Bullnose	6 x 6	Q-1665U	44
	Floor Bullnose Corner	6 x 6	QCRL-1665U	44
	Floor Bullnose	8 x 8	Q-1885U	25
	Floor Bullnose Corner	8 x 8	QCRL-1885U	25
	Cove Base ★	5 x 8	Q-3585U	24
	Cove Base ★	5 x 6	Q-3565U	44
	Cove Base Outcorner ★	5 x 6	QCR-L-3565U	20
	Cove Base Incorner ★	5 x 1	QB-3565U	25

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

★ Not available in Flash colors; use coordinating solid color


### INSTALLATION & PRICING

**RECOMMENDED GROUT JOINT:**

Floor: 3/8"

**RELATIVE PRICING:** Low to High

**SHADE VARIATION**



### PERFORMANCE CHARACTERISTICS

	ASTM#	FLOOR RESULT
Water Absorption	C373	≤ 3.0%
Breaking Strength	C648	> 400 lbs.
Scratch Hardness	MOHS	7.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	N/A

For additional information on test results, visit us at: [americanolean.com/information/TestResults](http://americanolean.com/information/TestResults).

### USAGE

FLOORS	WALLS	COUNTERTOPS
F	W	C

### APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	N/A	●
Wet & Level – Interior Floor	≥ 0.42	●
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	●*
Ramps & Inclines	≥ 0.65	●*
Walls/Backsplashes	N/A	●
Countertops	N/A	●
Pool Linings	N/A	●**

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit [americanolean.com/DCOF](http://americanolean.com/DCOF).

#### APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

Suitable for industrial installations requiring high compressive strength.

Subject to Oils: Absorbs oils, grease and other liquids to keep floors slip-resistant, yet does not contaminate the surface. Proper cleaning methods easily remove any contaminants that do get absorbed into the tile.

\* Abrasive surface only

\*\* 6 x 6 floor tile only

### NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at: [americanolean.com/Factors](http://americanolean.com/Factors).

We do not recommend light colored quarry tile in commercial kitchens unless properly sealed or a grout release is used. Periodic resealing of the tile may be necessary.

Special care should be taken when grouting; a grout release is recommended to prevent finely powdered pigments from lodging in the pores of the tile surface.

It is necessary to follow the proper procedures and recommendations from the grout and maintenance products' manufacturers.



**PRE-CONSUMER  
RECYCLED MATERIALS**



**MADE IN THE U.S.A.**

All or select items within this series meet the requirements for these qualifications. For more information visit [americanolean.com](http://americanolean.com).



Naturally, many of our products can help you earn LEED™ credits.

**888.AOT.TILE**

©2017 AMERICAN OLEAN (12/17)



**AMERICAN OLEAN®**  
PROVEN IN TILE™