

R | Timber Grove 12 mil PRODUCT SPECIFICATIONS

STYLE NAME	TIMBER GROVE
STYLE NUMBER	I323V
CONSTRUCTION	LVT
WEAR LAYER THICKNESS	12 mil (.012 inches / .3 mm)
OVERALL THICKNESS	0.098 inches (2.5 mm)
REFERENCE SPECIFICATION	Class III printed film vinyl plank
ASTM F 1700	Type B (embossed)
FINISH	ExoGuard™
INSTALLATION	Glue Down
RECOMMENDED ADHESIVE	Shaw 4100 or S150

Packaging

PLANK SIZE	5.96 in W x 48 in L
PIECES /BOX	21
SQ FT /BOX	41.72
WEIGHT (LB /BOX)	35.44

Performance Testing


STATIC LOAD / ASTM F 970	Modified – 1500 psi (lbs/sq in)
RESISTANCE TO INDENTATION / ASTM 1914	Passes <8%
RESISTANCE TO CHEMICALS / ASTM F925	Passes
RADIANT FLUX / ASTM E 648	Class I
SMOKE DENSITY / ASTM E 662	<450

Warranty

7 Year Light Limited Commercial Warranty.

Please visit patcraft.com for the most current warranty information.

Installation Methods

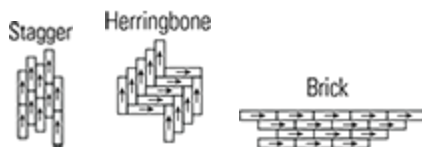

Environmental

INDOOR AIR QUALITY

FloorScore® Certified