


KEILHAUER

Juxta Table
Assembly Guide




Tools Required


(1) Pneumatic Driver Gun



(1) Robertson Bit




(1) Hex Bit




Hardware Included



(5) 1/4-20 x 1 3/4"
Socket Head
Cap Bolts




(5) 1/4-20 x 3/4"
Button Socket
Cap Bolts




(8) 1/4-20 x 5/8"
Rod Bolts

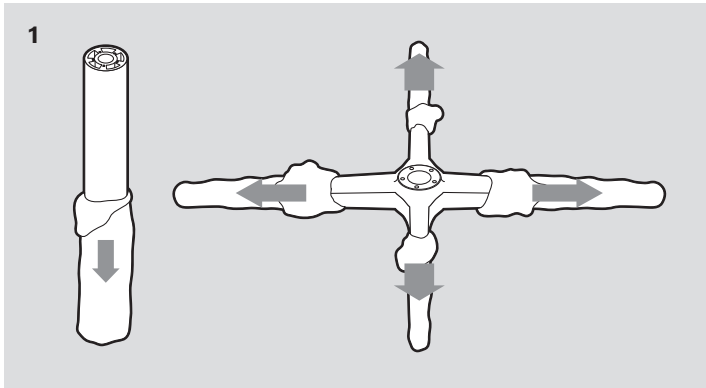


Peel back protective polyfoam on both column and base.

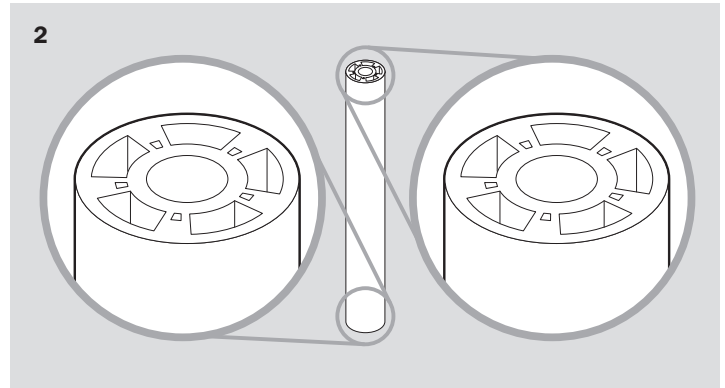


Both ends of the column are the same.

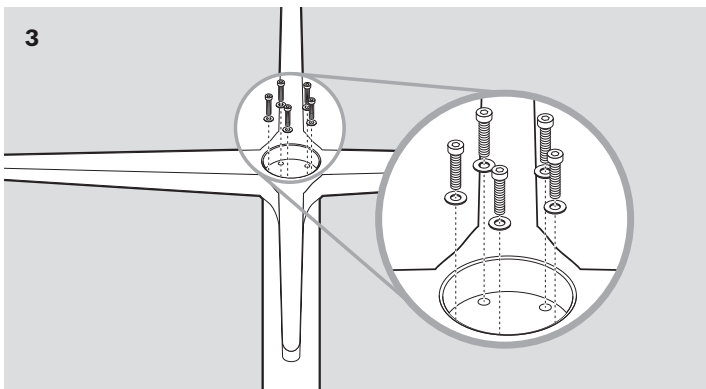


Line up the holes and assemble using the five 1/4-20 x 1 3/4" socket head cap bolts and lock washers.

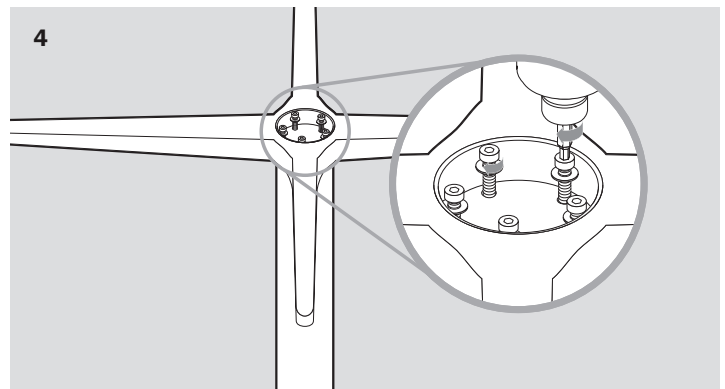

Tighten bolts using a staggered procedure until all of the bolts are tight.

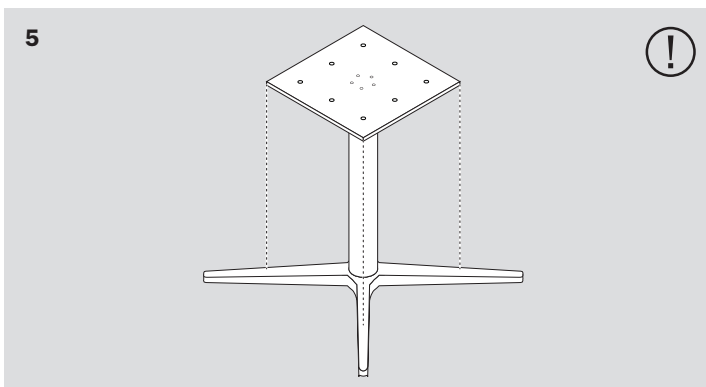

Assemble the mounting plate to the column. The corner of the plate must line up with the leg.

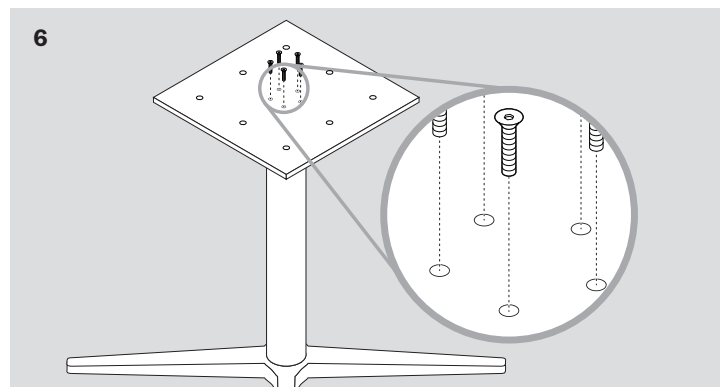


Use five 1/4-20 x 3/4" button socket cap bolts in a staggered procedure until all of the bolts are tight.

(5) Lock Washers
for Socket Head
Cap Bolts




Warning

Ensure mounting plate is aligned
with the table leg, as shown in
step 5.

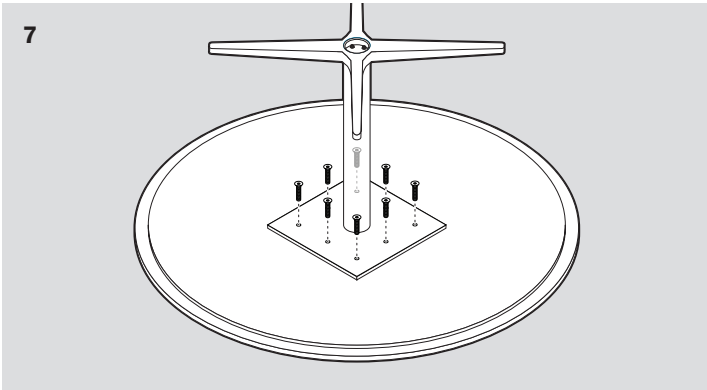

Assemble the base to the top. Using eight 1/4-20 x 5/8" rod bolts, secure the base to the top by tightening in a staggered procedure.

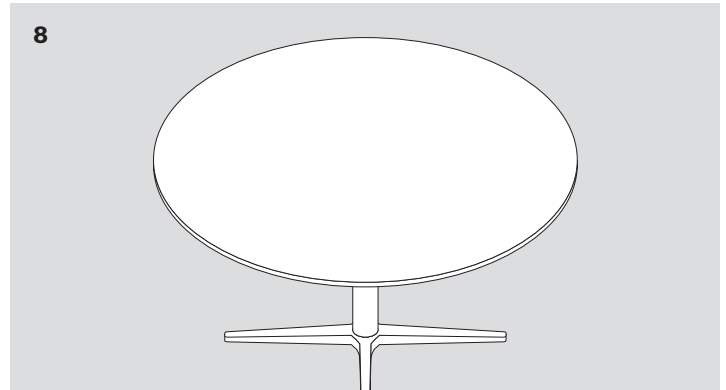

Move the table into place.

Juxta Table Designed by EOOS

keilhauer.com

1450 Birchmount Road
Toronto, Ontario, Canada
M1P 2E3

T 416 759 5665
F 416 759 5723
1 800 724 5665

KEILHAUER