


SASSUOLO STONE TONES



WHITE Matte 3"x12" - BLACK Matte 3"x12" - WHITE Glossy & Matte Mix Diamond 3"x12"

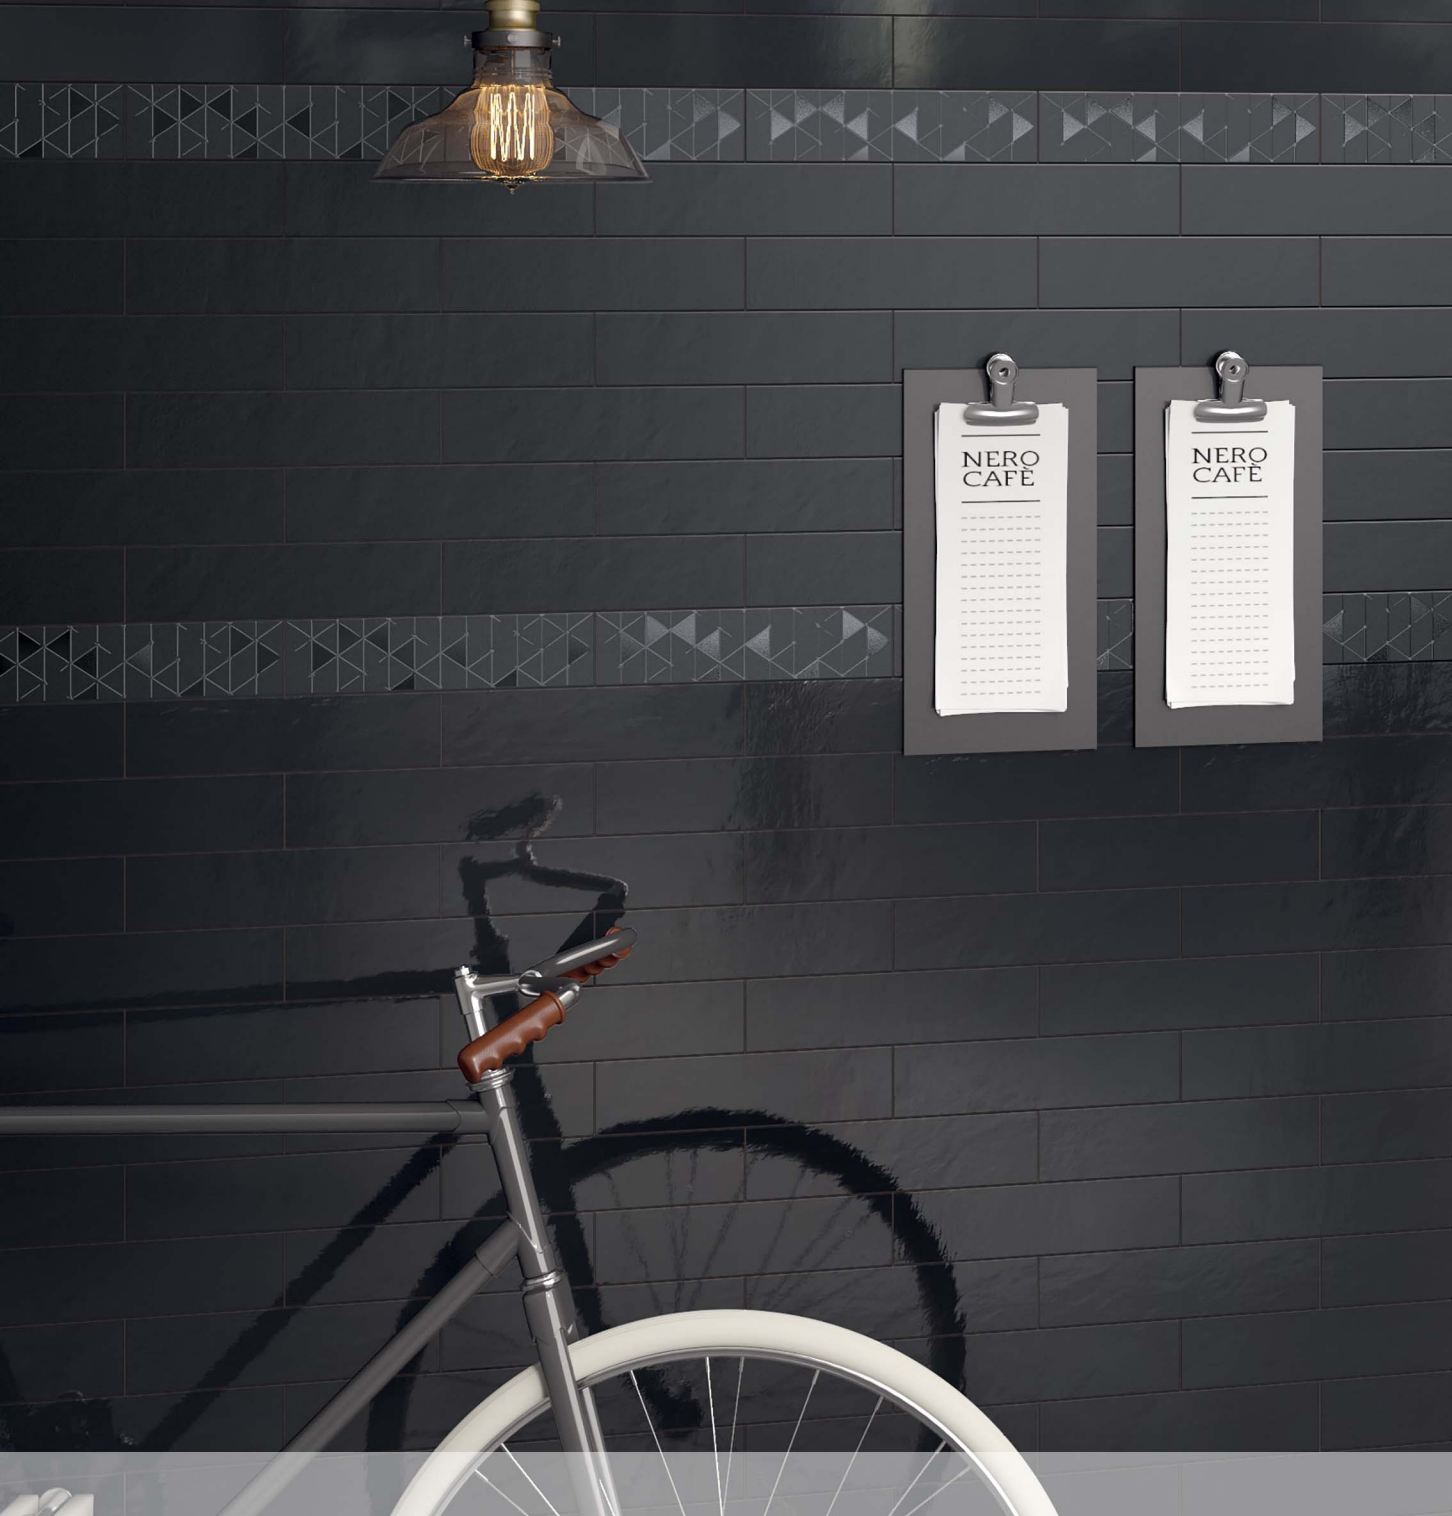

BLACK Glossy 3"x12" - BLACK Matte 3"x12" - PEARL Matte 3"x12"



BLACK Glossy 3"x12" - BLACK Geometric Glossy & Matte Mix 3"x12" - PEARL Matte 3"x12"



WHITE Glossy 3"x12" - GREY Glossy 3"x12" - PEARL Glossy 3"x12"



WHITE Glossy 3"x12" - WHITE Matte 3"x12" - AZURE Glossy 3"x12" - GREY Matte 3"x12"



BEIGE Matte 3"x12" - BEIGE Texture Matte 3"x12"



BEIGE Matte 3"x12" - BEIGE Texture Matte 3"x12"



ROSE Glossy 3"x12" - ORANGE Matte 3"x12" - V2 Triangles Mix Matte 3"x12" - ORANGE Line Mix Glossy & Matte Mix 11.2"x12"




ROSE Glossy 3"x12" - ORANGE Matte 3"x12" - V2 Triangles Mix Matte 3"x12"



WHITE Diamond Glossy 3"x12" - WHITE Matte 3"x12"

SASSUOLO STONE TONES

COLOR & SIZE AVAILABILITY Thickness: 8.5mm



White Gloss 3"x12"



Black Gloss 3"x12"



Grey Gloss 3"x12"



Pearl Gloss 3"x12"



Beige Gloss 3"x12"



Rose Gloss 3"x12"



Orange Gloss 3"x12"



Azure Gloss 3"x12"



White Matte 3"x12"



Black Matte 3"x12"



Grey Matte 3"x12"



Pearl Matte 3"x12"



Beige Matte 3"x12"



Rose Matte 3"x12"









Orange Matte 3"x12"



Azure Matte 3"x12"

DECORS Thickness: 8.5mm

LINE MIX 11.2"x12" Finish: Glossy & Matte Mix



GEOMETRIC 3"x12" Finish: Glossy & Matte Mix




DIAMOND 3"x12" Finish: Glossy



SASSUOLO STONE TONES

DECORS Thickness: 8.5mm


TEXTURE 3"x12" Finish: Matte




TRIANGLES MIX 3"x12" Finish: Matte



LAYING PATTERNS



Straight-Forward Installation




Brick-Pattern Installation




Random Installation



Herringbone Installation



Vertical Installation



Modular Laying Installation

PACKAGING

SIZE 3"x12"

Thickness: 8.5mm

Pcs/Boc: 48

Mq/Box: 1.08

Kg/Box: 19.50

Box/Pallet: 64

Mq/Pallet: 69.12

Kg/Pallet: 1248

For single color use and non-modular pattern, the smallest grout joint is 3mm.



TECHNICAL CHARACTERISTICS

Caratteristiche Tecniche Technical Characteristics Caractéristiques Techniques Technische Anforderungen Características técnicas Технические характеристики	Norma Norms Norme Norm Norma Норма	Requisiti per misura nominale N. Requirement for nominal size N. Conditions requises pour obtenir mesure nominale N. Voraussetzungen für das Nominalmaß N. Requisitos para el tamaño nominal N. Требования к номинальному размеру N.	Valore medio. Average value. Valeur Moyenne. Durchschnittswert. Valor Mediano. Среднее значение.
Lunghezza e Larghezza. Length and width. Longueur et largeur. Länge und Breite. Longitud y anchura. Длина и ширина.	 ISO 10545-2	± 0,9 mm	Conforme. / Suitable for. / Conforme. Konform. / Conforme. / Соответствующий.
WSpessore. Thickness. Epaisseur. Stærke. Espesor. Толщина.		± 0,5 mm	Conforme. / Suitable for. / Conforme. Konform. / Conforme. / Соответствующий.
Rettilinearità spigoli. Straightness. Equerrage des angles. Geradlinigkeit der Kanten. Rectilinéidad de los cantos. Прямолинейность ребёр.		± 0,75 mm	Conforme. / Suitable for. / Conforme. Konform. / Conforme. / Соответствующий.
Ortogonalità. Squareness. Orthogonalité. Rechtwinkligkeit. Ortogonalidad. Ортогональность.		± 0,75 mm	Conforme. / Suitable for. / Conforme. Konform. / Conforme. / Соответствующий.
Planarità. Flatness. Planéité. Planität. Planaridad. Плоскостность.		± 0,75 mm	Conforme. / Suitable for. / Conforme. Konform. / Conforme. / Соответствующий.
Assorbimento % d'acqua. Water Absorption. Absorption d'eau. Wasseraufnahme. Absorción % de agua. Водопоглощение, %.	 ISO 10545-3	≤ 0,5%	Conforme. / Suitable for. / Conforme. Konform. / Conforme. / Соответствующий.
Sforzo di rottura. Breaking strength. Force de rupture. Bruchlast. Esfuerzo de ruptura. Усилие на излом.	 ISO 10545-4	(Spessore. Thickness. ≥ 7,5 mm) S ≥ 1300 N	Conforme. / Suitable for. / Conforme. Konform. / Conforme. / Соответствующий.
Resistenza alla flessione. Breaking strength. Résistance a la flexion. Biegefestigkeit. Resistencia a la flexión. Прочность на изгиб.	 ISO 10545-4	R ≥ 35 N/mm²	Conforme. / Suitable for. / Conforme. Konform. / Conforme. / Соответствующий.
Resistenza all'abrasione profonda. Deep scratch resistance. Résistance à l'abrasion. Tiefenabriebharte. Resistencia a la abrasión profunda. Устойчивость к глубокому истиранию.	 ISO 10545-6	≤ 175 mm³	-
Coefficiente di dilatazione termica lineare. Linear heat expansion coefficient. Coefficient de dilatation thermique linéique. Lineare thermische Dehnung. Coeficiente de dilatación térmica lineal. Коэффициент линейного расширения.	 ISO 10545-8	Valore dichiarato (ISO 13006: metodo di prova disponibile). Declared value (ISO 13006: Test method available).	≤ 7 (R _K) ⁻¹
Resistenza agli sbalzi termici. Thermal shock resistance. Résistance aux écarts de température. Temperaturwechselbeständigkeit. Resistencia a los choques térmicos. Стойкость к перепаду температур.	 ISO 10545-9	In accordo con la EN ISO 10545-1 (ISO 13006: metodo di prova disponibile). In accordante whit EN ISO 10545-1 (ISO 13006: Test method available).	Resiste. Resistant. Résistant. Beständig. Resiste. Выдерживает
Resistenza al gelo. Frost resistance. Résistance au gel. Frostbeständigkeit. Resistencia a las heladas. Морозостойкость.	 ISO 10545-12	In accordo con la EN ISO 10545-1 (ISO 13006: Richiesta). In accordante whit EN ISO 10545-1 (ISO 13006: Required).	Resiste. Resistant. Résistant. Beständig. Resiste. Выдерживает
Resistenza ai prodotti chimici di uso domestico ed agli additivi per piscina. Resistance to household chemicals and swimming pool salts. Résistance aux produits chimiques à usage domestique et aux adjuvants pour piscines. Beständigkeit gegen Haushaltschemikalien und Badewasserzusätze. Resistencia a los productos químicos de uso doméstico y a los aditivos para piscinas. Устойчивость к воздействию химических средств домашнего использования и химических добавок для бассейна.	 ISO 10545-13	Classe UB min.	GA
Resistenza a basse concentrazioni di acidi e alcali. Resistance to low concentrations of acids and alkalis. Résistance aux acides et aux alcalis à basse concentration. Beständigkeit gegen niedrigkonzentrierte Säuren und Laugen. Resistencia a bajas concentraciones de ácidos y álcalis. Устойчивость к кислотам и щелочам низкой концентрации.		Valore dichiarato (ISO 13006: secondo la classificazione indicata dal fabbricante). Declared value (ISO 13006: Manufacturer to state classification).	GLA
Resistenza ad alte concentrazioni di acidi e alcali. Resistance to high concentrations of acids and alkalis. Résistance aux acides et aux alcalis à haute concentration. Beständigkeit gegen hochkonzentrierte Säuren und Laugen. Resistencia a altas concentraciones de ácidos y álcalis. Устойчивость к кислотам и щелочам высокой концентрации.		Valore dichiarato (ISO 13006: metodo di prova disponibile). Declared value (ISO 13006: Test method available).	GHA
Resistenza alle macchie. Resistance to stains. Résistance aux taches. Fleckenbeständigkeit. Resistencia a las manchas. Тойкость к образованию пятен.	 ISO 10545-14	Valore dichiarato (ISO 13006: metodo di prova disponibile). Declared value (ISO 13006: Test method available).	Pulibile. Cleanable. Nettoyable. Kann gereinigt werden. Limpiable. Моющийся.
Rilascio di sostanze pericolose: Cadmio (in mg/dm²) e Piombo (in mg/dm²). Release of dangerous substances: Cadmium (in mg/dm²) and Lead (in mg/dm²). Emission de substances dangereuses: Cadmium (mg/dm²) et Plomb (mg/dm²). Emission von gefährlichen Stoffen: Cadmium (mg/dm²) und Blei (mg/dm²). Emisión de sustancias peligrosas: Cadmio (mg/dm²) y Plomo (mg/dm²). Выделение вредных веществ: Кадмия (в мг/дм²) и свинца (в мг/дм²).	 ISO 10545-15	Valore dichiarato (ISO 13006: metodo di prova disponibile). Declared value (ISO 13006: Test method available).	≤ 0,01 mg/dm² Cd ≤ 0,1 mg/dm² Pb