



SIENNA NATURAL STONE 1.0
VEINCUT



Floor: GREY VEINCUT Natural 24"x48" Rectified



GOLD VEINCUT Natural 24"x48" Rectified & GOLD Flamed 12"x24" Rectified





WHITE VEINCUT Polished 8"x48" Rectified & WHITE CROSSCUT Polished 24"x48" Rectified [Sienna Natural Stone 2.0 (Crosscut)]

SIENNA NATURAL STONE 1.0




COLOR AVAILABILITY

WHITE VEINCUT

NATURAL



FLAMED

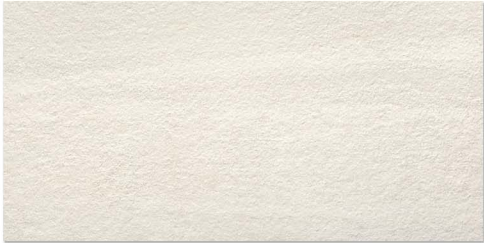

GOLD VEINCUT

NATURAL



FLAMED



SAND VEINCUT

NATURAL



FLAMED




GREIGE VEINCUT

NATURAL



FLAMED

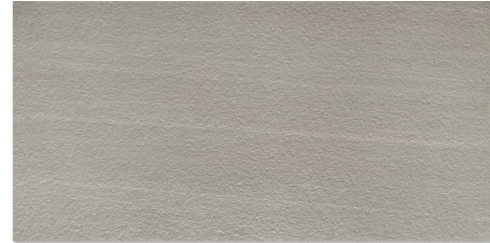

GREY VEINCUT

NATURAL



FLAMED



BROWN VEINCUT

NATURAL



FLAMED



BLACK VEINCUT

NATURAL




FLAMED



SIZE AVAILABILITY

Available in all colors, see finish availability below.


THICKNESS: 10mm



24"x48" Rectified




8"x48" Rectified



24"x24" Rectified



12"x24" Rectified



18"x36" Rectified

Natural **Polished** **Flamed**

Also available in **Polished** Finish (Meets D.C.O.F.).

SHADE
VARIATION

V3 High



7,5%

SIENNA NATURAL STONE 1.0

DECORS

Mosaic 12"x12" Sheet (2"x2" Pieces) Thickness: 10mm - Finish: Natural



WHITE



GOLD



GREY



BLACK

OnFibre-Mesh Backing.

Also available in SAND, GREIGE and BROWN.

Mosaic Squadro 6"x48" Finish: Polished



WHITE



SAND




GREY



BLACK


SPECIAL PIECES Available in all colors




Stair Tread
12"x13" Rectified
Finish: Flamed




Stair Tread
12"x24" Rectified
Finish: Natural




L-Shaped Piece
6"x24"x2" Rectified
Finish: Flamed



Step
13"x24"x1.25"x1.25" Rectified
Finish: Natural/Polished



Corner Tile DX/SX
13"x13"x1.25"x1.25" Rectified
Finish: Natural/Polished



Cove Base
6.33"x12"



Cove Base Int. Corner
1"x2.33"



Cove Base Ext. Corner
1"x2.33"



TECHNICAL CHARACTERISTICS Dry - Pressed Ceramic Tiles ISO 13006 : 2012 Annex G - UNI EN 14411 : 2012 Annex G - Bla UGL

CARATTERISTICHE TECNICHE Technical Features - Caracteristiques Techniques Technische Eigenschaften - Caracteristicas Tecnicas - Технические Характеристики		NORMA Standard - Norme Norm - Norma - Норма	VALORI Value - Valeur Vorgabe - Valor - Средние
		UNI EN ISO 10545/2	± 0,26% / ± 1,5mm
		ASTM C485 Warpage	
		Calibrated ± 0,75% (max ± 0,09 in)	-
		Rectified ± 0,40% (max ± 0,05 in-size ≤ 80cm) (max ± 0,07 in-size > 80cm)	± 0,25% (max ± 0,05 in-size ≤ 80cm) (max ± 0,07 in-size > 80cm)
		UNI EN ISO 10545/3 ≤ 0,5 % ASTM C373	Conforme Compliant
		ASSORBIMENTO D'ACQUA - Valore medio in % Water absorption - Average value expressed in % Absorption d'eau - Valeur moyenne en % Wasseraufnahme - Durchschnittswert in % Absorción de agua - Valor medio en % - Поглощение воды	
		RESISTENZA ALLA FLESSIONE Modulus of rupture - Resistance a la flexion Biegefestigkeit - Resistencia a la flexion - Прочность на изгиб	UNI EN ISO 10545/4 ≥ 50 N/mm²
		FORZA DI ROTTURA Breaking strength - Résistance à la rupture Bruchlast - Resistencia a la rotura - Разрывное усилие	UNI EN ISO 10545/4 ASTM C648 ≥ 2000 N 700 LBS
		RESISTENZA AL GELO Frost resistance - Résistance au gel - Frostbeständigkeit Resistencia a las heladas - Морозостойкость	UNI EN ISO 10545/12 ASTM C1026 Conforme Unaffected
		RESISTENZA CHIMICA ad alte e basse concentrazioni di acidi e basi Chemical resistance to high and low acid and basic concentrations Résistance chimique aux hautes et basses concentrations d'acides et de bases Chemikalienfestigkeit bei hohen und niedrigen Konzentrationen von Säuren und Basen Resistencia química con concentraciones altas y bajas de ácidos y bases Химическая стойкость к высоким и низким концентрациям кислот и щелочей	UNI EN ISO 10545/13 ASTM C-650 UA - ULA - UHA Unaffected
		RESISTENZA ALLE MACCHIE Stain resistance - Résistance aux taches - Fleckenbeständigkeit Resistencia a las manchas - Стойкость к образованию пятен	UNI EN ISO 10545/14 CTI 81-7D 5 No Evident Variation
		COEFFICIENTE DI ATTRITO Slip resistance - Coefficient de glissement - Rutschfestigkeit Barfußbereich Coeficiente de atrito medio - Коэффициент трения	DIN 51130 DIN 51097 ANSI A 137.1 - 2012 DCOF (Section 9.6) B.C.R.A. For white 20x120 NATURAL R10 B (A+B) 0.51 Wet POLISHED R9 A 0.47 Wet FLAMED R11 C (A+B+C) 0.72 Wet ≥ 0,40 ≥ 0,40 ≥ 0,40
			SHADE VARIATION V3 High

PACKAGING

Formato Size Format Format Tamaño Формат	Spessore (mm) Thickness (mm) Epaisseur (mm) Stärke (mm) Espesor (mm) Толщина (mm)	Pz. x Mq. Pieces x Sqm Pcs / M² Stk. x Qm Pzs x Mc. Шт. x Кв.М.	Pz. x Scat. Pieces x Box Pcs / Bte Stk. x Krt. Pzs x Caja Шт. x Кор.	Mq. x Scat. Sqm x Box M² / Bte Qm x Krt. Mc. x Caja Кв.М. x Кор.	Peso x Scat. (Kg) Weight x Box (Kg) Poids / Bte (Kg) Gewicht x Krt. (Kg) Peso x Caja (Kg) Вес x Кор. (Kg)	Scat. x Pal. Boxes x Pal. Bte / Pal. Krt. x Pal. Cajas x Pal. Кор. x Подд.	Mq. x Pal. Sqm x Pal. M² / Pal. Qm x Pal. Mc. x Pal. Кв.М x Подд.	Peso x Pal. (Kg) Weight x Pal. (Kg) Poids / Pal. (Kg) Gewicht x Pal. (Kg) Peso x Pal. (Kg) Вес x Подд (Kg)
24"x48"	10	1,39	2	1,440	36,20	22	31,68	796
8"x48"	10	4,17	4	0,960	23,50	36	34,56	846
24"x24"	10	2,78	3	1,080	24,40	40	43,20	976
12"x24"	10	5,56	6	1,080	26,50	40	43,20	1060
Mosaic 12"x12"	10	11,11	5	0,450	9,75	60	27,00	585
18"x36"	10	2,47	3	1,215	28,70	30	36,45	861



www.ceramictechnics.com



(770) 740-0050



(770) 740-1199



**1298 Old Alpharetta Road
Alpharetta, GA 30005**

FOLLOW US ON SOCIAL MEDIA



www.facebook.com/ceramictechnics



www.twitter.com/ceramictechnics



www.instagram.com/ceramictechnics



www.pinterest.com/ctechnics



www.houzz.com/user/ceramictechnics