

# Assembly Instructions ■

MyPlace® Lounge

Ganging

June 2017

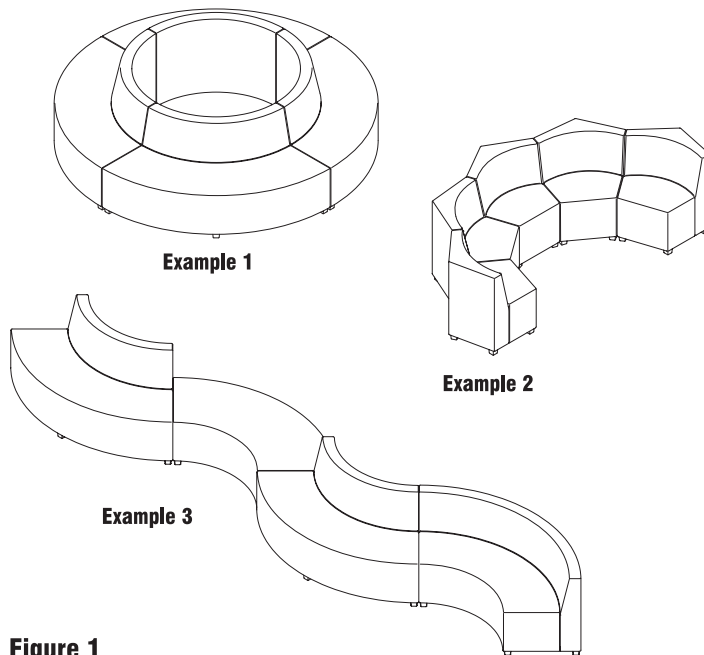


Figure 1

## Ganging Instructions

**Note:** MyPlace Lounge Seating “ganging” is primarily intended for lounge units with the foot or glide option. It is not recommended to gang units together which have the caster option.

1. Move units together into the intended lounge seating configuration, at or near their final site location. Reference assembled configuration examples shown (Figure 1).

**Note:** Two, or at most three units may be ganged together in a “fixed” manner, then the groups of fixed-ganged units are ganged together in the “continuation” ganging manner as described below.

## Fixed Ganging

2. Turn two units carefully onto their backs or upside down, next to each other on a soft, protective surface to begin the fixed-ganging process. Carefully hold and align two units together, position a ganging bracket centered between the two units (Figure 2), as illustrated around the square feet (for the foot option – Detail A) or aligned and centered around glides (less precisely for glide option – Detail B). One bracket at a time, secure a bracket to the front and back, underside of the pair of lounge units using six #14 x 1” Phillips screws (Figure 3).

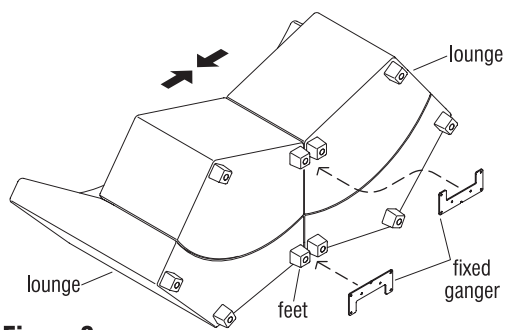


Figure 2



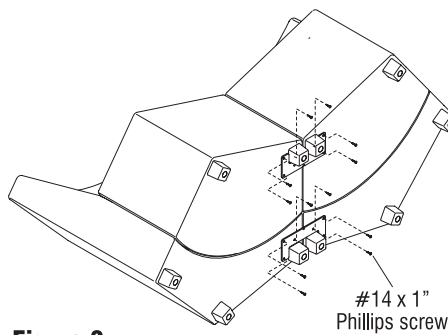


Figure 3

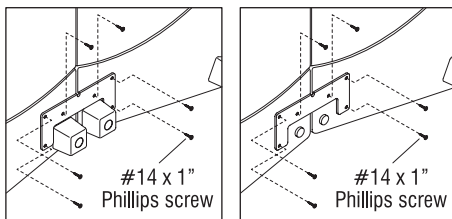

Detail A - Feet



Detail B - Glide



Assemble units as described herein only. To do otherwise may result in instability. All screws, nuts and bolts must be tightened securely and must be checked periodically after assembly. Failure to assemble properly, or to secure parts may result in assembly failure and personal injury.



Assemble units as described herein only. To do otherwise may result in instability. All screws, nuts and bolts must be tightened securely and must be checked periodically after assembly. Failure to assemble properly, or to secure parts may result in assembly failure and personal injury.


### Continuation Ganging

**Note:** Continuation gangers attach fixed to one "fixed-ganged" unit pair at the front and back, and when all unit pairs are turned to the upright position, the continuation ganger is designed to capture the foot (more precisely), or the glide (less precisely) of the second unit pair, to help keep the units in configuration.


- As illustrated, but following the intended final lounge seating configuration, carefully align and install a continuation ganger to the front and back underside of each first unit pair intended to join next to the second pair. The second unit pair which will continuation gang to the first will not require ganging brackets at the side where the first joins to it (Figure 4).

- When all lounge seating units are fixed-ganged and have appropriate continuous gangers added where required, turn unit pairs to the upright position and move into final configuration position. At continuation gang locations, lift the unit pair end without a ganger over the installed ganger of the other pair to nest units together in configuration (Figure 5).

**Note:** If size and shape permit, and if appropriate number of helpers are available to carefully lift and align units, the continuation gang units may be fixed ganged together using an additional three #14 x 1" Phillips screws as in step 2 on the previous page.

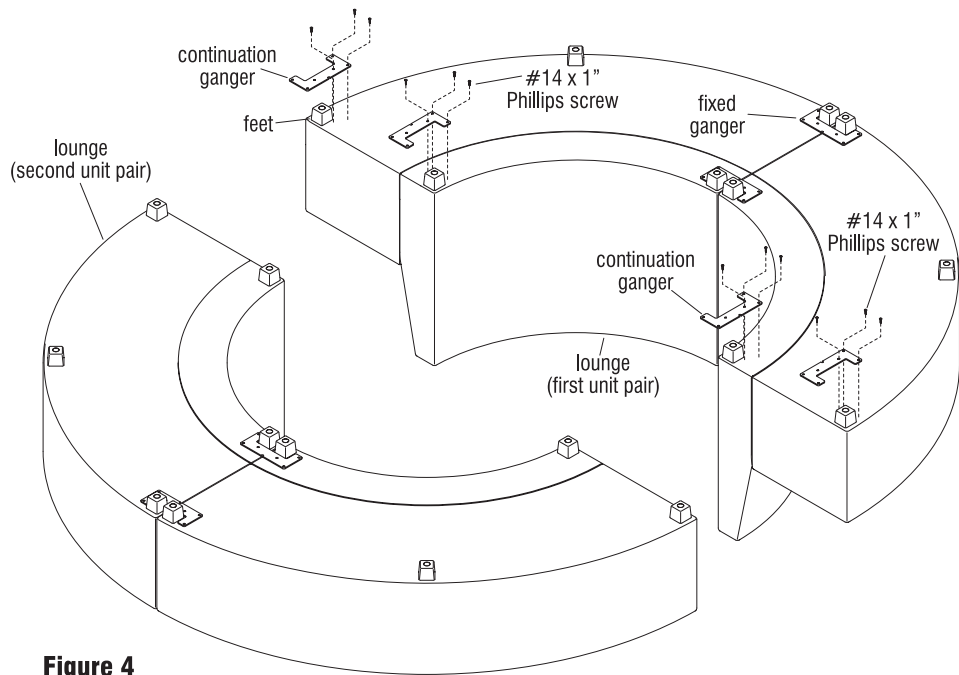

**Figure 4**

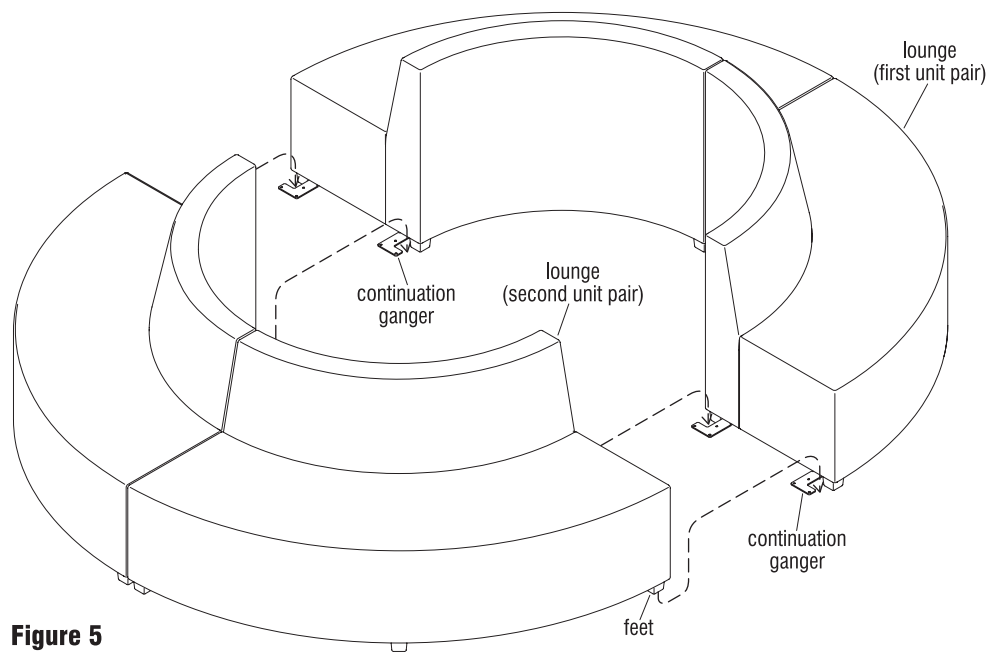

**Figure 5**