

TR0259

Recessed Wall Luminaires

1/5




we-ef



Description

IP55. Recessed wall luminaire. Suitable for installation in cavity wall construction or concrete pour construction using optional installation blockout.

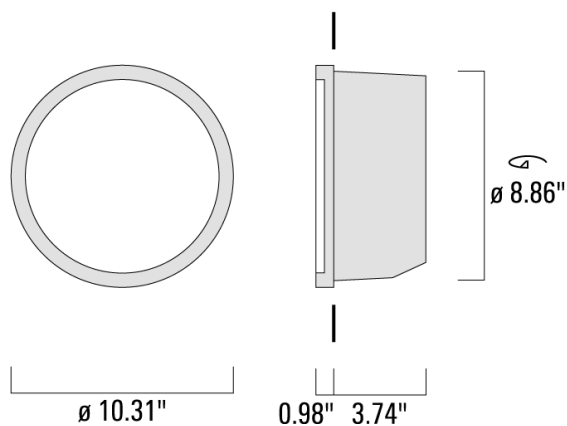

TR0259

Recessed Wall Luminaires

2/5



we-ef

Specifications

Material Specification

Body:	Luminaire body and lens frame constructed in die cast aluminum.
Lens:	Opal polycarbonate lens.
Colours:	RAL9004 Black RAL9007 Grey Metallic RAL9016 White RAL8019 Dark Bronze
Gasket:	Silicone rubber gasket
Fasteners:	PCS polymer coated stainless steel
Ingress protection:	IP55
Impact protection:	IK10
Corrosion protection:	5CE
Mounting:	Suitable for cavity wall construction. Refer to mounting accessories for optional installation blockouts for concrete pour construction.
Listings:	UL, c UL listed. Suitable for wet locations.

Electrical Specification

Power supply:	Integral [ECG] electronic ballast in 120, 277 or 347 volt. Specify voltage.
Power factor:	2
Driver / Ballast:	Integral HPF or ECG control gear
Cable:	Suitable for through wiring.

Ambient Temperature

Ta less than 25 deg C

TR0259

Recessed Wall Luminaires

3/5



Choices

Light Distributions	Lumens	Wattages	Colour Temperatures	Colours
 diffused distribution	1200	18	 3500K	 RAL9004 Black
	1800	26		 RAL9007 Grey Metallic
				 RAL9016 White
				 RAL8019 Dark Bronze

TR0259

Recessed Wall Luminaires

4/5



Configurations

Light Distributions	Part ID	Light Source	Lumen	Gear	Weight	Link
 diffused distribution	618-4633	CFQ26/ G24q-3 base	1800	electronic gear	9.00	
	618-4632	CFQ18/ G24q-2 base	1200	electronic gear	9.00	

Related Families / TR0200

Family		Dimensions	Wattage	Lumen	Links
					Links Download Data Sheet
TR0259 LED		10.31	6 W	807	 

TR0259

Recessed Wall Luminaires

5/5



Mounting Accessories

Installation blackout

C1

618-9395

 Installation blackout BTR25-I-RE

5.00

