

TR0259 LED

Recessed Wall Luminaires


1/5

we-ef



Description

IP55. Recessed LED wall luminaire. Suitable for installation in cavity wall construction or concrete pour construction using optional installation blockout.

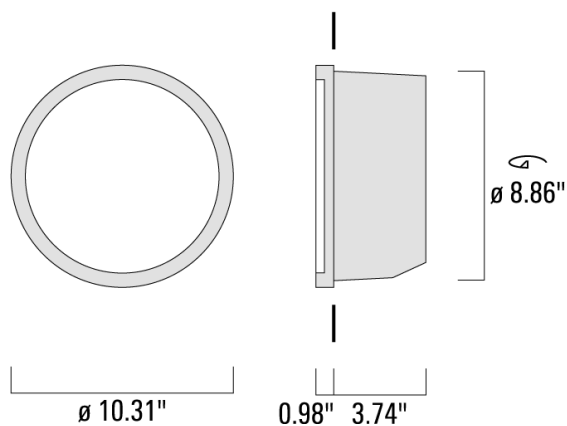

TR0259 LED

Recessed Wall Luminaires

2/5



we-ef

Specifications

Material Specification

Body:	Luminaire body and lens frame constructed in die cast aluminum.
Lens:	Opal polycarbonate lens.
Colours:	RAL9004 Black RAL9007 Grey Metallic RAL9016 White RAL8019 Dark Bronze
Gasket:	Silicone rubber gasket
Fasteners:	PCS polymer coated stainless steel
Ingress protection:	IP55
Impact protection:	IK10
Corrosion protection:	5CE
Surge protection:	1/2 kV
Mounting:	Suitable for cavity wall construction. Suitable for cavity wall construction. Refer to mounting accessories for optional installation blockouts for concrete pour construction.
Listings:	Please contact WE-EF for ETL/UL listing status.

Electrical Specification

Power supply:	Integral [ECG] LED driver in 120 or 277 volt. Specify voltage.
Driver / Ballast:	Integral EC electronic converter
Cable:	Suitable for through wiring.

Lifetime

LED >60,000 h Ta 25°(L70/B10) Control gear >50,000 h Ta 25°

TR0259 LED

Recessed Wall Luminaires

3/5



we-ef

Choices

Light Distributions	Lumens	Wattages	Colour Temperatures	Colours
 diffused distribution	807	6	 4000 K	 RAL9004 Black
			 3000 K	 RAL9007 Grey Metallic
				 RAL9016 White
				 RAL8019 Dark Bronze

TR0259 LED

Recessed Wall Luminaires

4/5



Configurations

Light Distributions	Part ID	Light Source	Lumen	Gear	Weight	Link
 diffused distribution	618-4621	LED-6/6W / 350 mA - 4000 K	807	electronic gear	4.70	
	618-4622	LED-6/6W / 350 mA - 3000 K	807	electronic gear	4.70	

Related Families / TR0200

Family		Dimensions	Wattage	Lumen	Links
					Links Download Data Sheet
TR0259 LED		10.31	6 W	807	 

TR0259 LED

Recessed Wall Luminaires

5/5



Mounting Accessories

Installation blackout

C1

618-9395 Installation blackout BTR25-I-RE

5.00

