

# SVL259

## Recessed Wall Luminaires

1/5




**we-ef**



### Description

IP55. Recessed vertical steplight for orientation. Shielded light source. Suitable for installation in cavity wall construction or concrete pour construction using optional installation blackout.

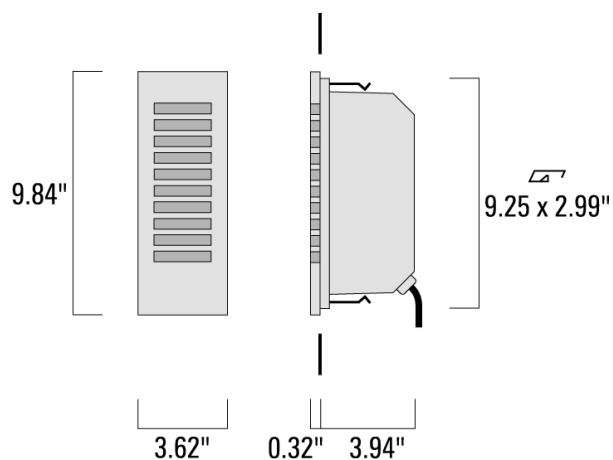

# SVL259

## Recessed Wall Luminaires

2/5



**we-ef**

## Specifications

### Material Specification

|                       |                                                                                                                                                                   |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Body:                 | Luminaire body and lens frame constructed in die cast aluminum.                                                                                                   |
| Lens:                 | Opal polycarbonate lens.                                                                                                                                          |
| Colours:              | <div><div></div> RAL9004 Black</div> <div><div></div> RAL9007 Grey Metallic</div> <div><div></div> RAL9016 White</div> <div><div></div> RAL8019 Dark Bronze</div> |
| Gasket:               | Silicone rubber gasket                                                                                                                                            |
| Fasteners:            | PCS polymer coated stainless steel                                                                                                                                |
| Ingress protection:   | IP55                                                                                                                                                              |
| Impact protection:    | IK10                                                                                                                                                              |
| Corrosion protection: | 5CE                                                                                                                                                               |
| Mounting:             | Suitable for installation in cavity wall construction or concrete pour construction using optional installation blockout.                                         |
| Listings:             | UL, c UL listed. Suitable for wet locations.                                                                                                                      |

### Electrical Specification

|               |                                                                        |
|---------------|------------------------------------------------------------------------|
| Power supply: | Integral [ECG] electronic ballast in 120 or 277 volt. Specify voltage. |
| Cable:        | Suitable for through wiring.                                           |

### Ambient Temperature

Ta less than 25 deg C

SVL259

Recessed Wall Luminaires

3/5



Choices

| Light Distributions                                                                                               | Lumens                                         | Wattages                                  | Colour Temperatures                                                                               | Colours                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------------------------------------------------------------------------------------------------------------|------------------------------------------------|-------------------------------------------|---------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <div>diffused distribution</div> | <div>900</div> <div>1200</div> <div>1800</div> | <div>13</div> <div>18</div> <div>26</div> | <div>3500K</div> | <div>RAL9004 Black</div> <div>RAL9007 Grey Metallic</div> <div>RAL9016 White</div> <div>RAL8019 Dark Bronze</div> |

SVL259

Recessed Wall Luminaires


4/5



Configurations

| Light Distributions                                                                                     | Part ID  | Light Source       | Lumen | Gear            | Weight | Link                                                                                |
|---------------------------------------------------------------------------------------------------------|----------|--------------------|-------|-----------------|--------|-------------------------------------------------------------------------------------|
|  diffused distribution | 615-3431 | CFQ18/ G24q-2 base | 1200  | electronic gear | 2.60   |  |
|                                                                                                         | 615-3430 | CFQ13/ G24q-1 base | 900   | electronic gear | 2.60   |  |
|                                                                                                         | 615-3432 | CFQ26/ G24q-3 base | 1800  | electronic gear | 2.60   |  |

Related Families / SVL200

| Family     | Dimensions                                                                                    | Wattage | Lumen | Links                                                                                                                                                                                         |
|------------|-----------------------------------------------------------------------------------------------|---------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|            |                                                                                               |         |       | <div>Links</div> <div>Download Data Sheet</div>                                                                                                                                               |
| SVL259 LED |  9.84 x 3.62 | 6 W     | 807   | <div></div> <div></div> |

# SVL259

## Recessed Wall Luminaires

5/5



### Mounting Accessories

#### Installation blackout

C1

■ 615-9325 Installation blackout BST25-I

5.12

