

SVL259 LED

Recessed Wall Luminaires

1/5




we-ef



Description

IP55. Recessed LED vertical steplight for orientation. Shielded light source. Suitable for installation in cavity wall construction or concrete pour construction using optional installation blockout.

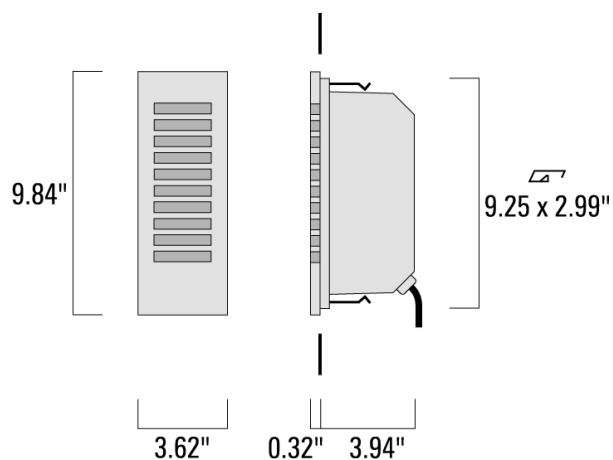

SVL259 LED

Recessed Wall Luminaires

2/5



we-ef

Specifications

Material Specification

Body:	Luminaire body and lens frame constructed in die cast aluminum
Lens:	Opal polycarbonate lens.
Colours:	RAL9004 Black RAL9007 Grey Metallic RAL9016 White RAL8019 Dark Bronze
Gasket:	Silicone rubber gasket
Fasteners:	PCS polymer coated stainless steel
Ingress protection:	IP55
Impact protection:	IK10
Corrosion protection:	5CE
Surge protection:	1/2 kV
Mounting:	Suitable for installation in cavity wall construction or concrete pour construction using optional installation blockout.
Listings:	ETL listed. Suitable for wet locations.

Electrical Specification

Power supply:	Integral [ECG] electronic 0-10 V dimmable driver in 120 or 277 volt. Specify voltage.
Driver / Ballast:	Integral EC electronic converter
Cable:	Suitable for through wiring.

Lifetime

LED >60,000 h Ta 25°(L70/B10) Control gear >50,000 h Ta 25°

SVL259 LED

Recessed Wall Luminaires

3/5



Choices

Light Distributions	Lumens	Wattages	Colour Temperatures	Colours
 diffused distribution	807	6	 3000 K	 RAL9004 Black
			 4000 K	 RAL9007 Grey Metallic
				 RAL9016 White
				 RAL8019 Dark Bronze

SVL259 LED

Recessed Wall Luminaires


4/5



Configurations

Light Distributions	Part ID	Light Source	Lumen	Gear	Weight	Link
 diffused distribution	615-3421	LED-6/6W / 350 mA - 3000 K	807	electronic gear	2.60	
	615-3420	LED-6/6W / 350 mA - 4000 K	807	electronic gear	2.60	

Related Families / SVL200

Family	Dimensions	Wattage	Lumen	Links
				Links Download Data Sheet
SVL259 LED	 9.84 x 3.62	6 W	807	 

SVL259 LED

Recessed Wall Luminaires

5/5



Mounting Accessories

Installation blackout

C1

■ 615-9325 Installation blackout BST25-I

5.12

