


ST0209 LED Stainless steel Recessed Wall Luminaires

1/5




we-ef



Description

IP55. Recessed LED steplight for orientation. Suitable for installation in cavity wall construction or concrete pour construction using optional installation blockout. Stainless steel finish.

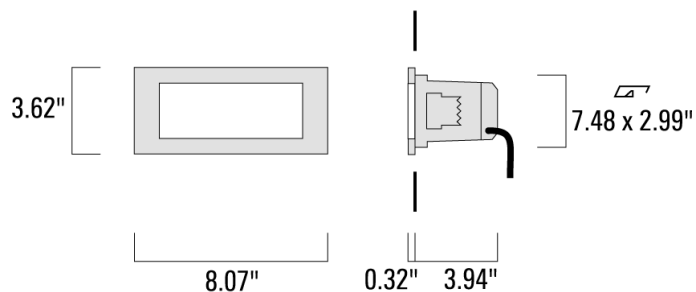

ST0209 LED Stainless steel Recessed Wall Luminaires



we-ef

2/5

Specifications

Material Specification

Body:	Luminaire body constructed in die cast aluminum.
Lens:	Opal polycarbonate lens.
Colours:	 Stainless Steel
Gasket:	Silicone rubber gasket
Fasteners:	PCS polymer coated stainless steel
Ingress protection:	IP55
Impact protection:	IK10
Corrosion protection:	5CE
Surge protection:	1/2 kV
Mounting:	Suitable for installation in cavity wall construction or concrete pour construction using optional installation blackout.
Listings:	ETL listed. Suitable for wet locations.

Electrical Specification

Power supply:	Integral [ECG] electronic 0-10 V dimmable driver in 120 or 277 volt. Specify voltage.
Driver / Ballast:	Integral EC electronic converter
Cable:	Suitable for through wiring.

Lifetime

LED >60,000 h Ta 25°(L70/B10) Control gear >50,000 h Ta 25°

ST0209 LED Stainless steel

Recessed Wall Luminaires



3/5

Choices

Light Distributions	Lumens	Wattages	Colour Temperatures	Colours
 diffused distribution	538	4	 3000 K	 Stainless Steel
			 4000 K	

ST0209 LED Stainless steel

Recessed Wall Luminaires



we-ef

4/5

Configurations

Light Distributions	Part ID	Light Source	Lumen	Gear	Weight	Link
 diffused distribution	615-0627	LED-4/4W / 350 mA - 3000 K	538	electronic gear	2.00	
	615-0626	LED-4/4W / 350 mA - 4000 K	538	electronic gear	2.00	

Related Families / ST0200

Family		Dimensions	Wattage	Lumen	Links	
					Links	Download Data Sheet
ST0209 LED		8.07 x 3.62	4 W	538		
ST0209 LED Stainless steel		8.07 x 3.62	4 W	538		
ST0259 LED		9.84 x 3.62	6 W	807		
ST0259 LED Stainless steel		9.84 x 3.62	6 W	807		
ST0279 LED		16.73 x 5.32	9 W	1211		
ST0279 LED Stainless steel		16.73 x 5.32	9 W	1211		

ST0209 LED Stainless steel

Recessed Wall Luminaires



5/5

Mounting Accessories

Installation blackout

C1

■ 615-9320 Installation blackout BST20-I

4.53

