


# ST0259 Stainless steel

## Recessed Wall Luminaires

1/5




**we-ef**



### Description

IP55. Recessed spotlight for orientation. Suitable for installation in cavity wall construction or concrete pour construction using optional installation blockout. Stainless steel finish.

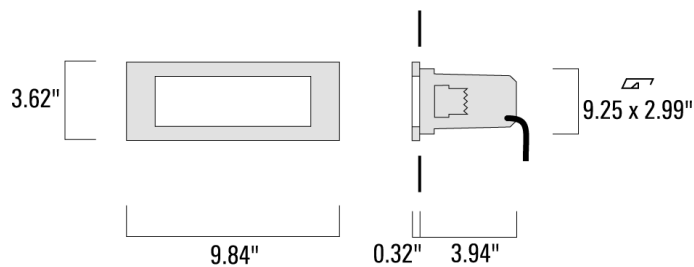

# ST0259 Stainless steel

## Recessed Wall Luminaires



**we-ef**

2/5

## Specifications

### Material Specification

|                       |                                                                                                                           |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------|
| Body:                 | Luminaire body constructed in die cast aluminum.                                                                          |
| Lens:                 | Opal polycarbonate lens.                                                                                                  |
| Colours:              |  Stainless Steel                         |
| Gasket:               | Silicone rubber gasket                                                                                                    |
| Fasteners:            | PCS polymer coated stainless steel                                                                                        |
| Ingress protection:   | IP55                                                                                                                      |
| Impact protection:    | IK10                                                                                                                      |
| Corrosion protection: | 5CE                                                                                                                       |
| Mounting:             | Suitable for installation in cavity wall construction or concrete pour construction using optional installation blockout. |
| Listings:             | UL, c UL listed. Suitable for wet locations.                                                                              |

### Electrical Specification

|               |                                                                        |
|---------------|------------------------------------------------------------------------|
| Power supply: | Integral [ECG] electronic ballast in 120 or 277 volt. Specify voltage. |
| Cable:        | Suitable for through wiring.                                           |

### Ambient Temperature

Ta less than 25 deg C

# ST0259 Stainless steel

## Recessed Wall Luminaires

3/5



### Choices

| Light Distributions                                                                                                | Lumens                                         | Wattages                                  | Colour Temperatures                                                                                | Colours                                                                                                        |
|--------------------------------------------------------------------------------------------------------------------|------------------------------------------------|-------------------------------------------|----------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| <div> diffused distribution</div> | <div>900</div> <div>1200</div> <div>1800</div> | <div>13</div> <div>18</div> <div>26</div> | <div> 3500K</div> | <div> Stainless Steel</div> |

# ST0259 Stainless steel

## Recessed Wall Luminaires

4/5



**we-ef**

## Configurations

| Light Distributions                                                                                     | Part ID  | Light Source       | Lumen | Gear            | Weight | Link                                                                                |
|---------------------------------------------------------------------------------------------------------|----------|--------------------|-------|-----------------|--------|-------------------------------------------------------------------------------------|
|  diffused distribution | 615-1637 | CFQ18/ G24q-2 base | 1200  | electronic gear | 2.60   |  |
|                                                                                                         | 615-1636 | CFQ13/ G24q-1 base | 900   | electronic gear | 2.60   |  |
|                                                                                                         | 615-1638 | CFQ26/ G24q-3 base | 1800  | electronic gear | 2.60   |  |

## Related Families / ST0200

| Family                     |                                                                                     | Dimensions   | Wattage | Lumen | Links                                                                                 |                                                                                       |
|----------------------------|-------------------------------------------------------------------------------------|--------------|---------|-------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                            |                                                                                     |              |         |       | Links                                                                                 | Download Data Sheet                                                                   |
| ST0209 LED                 |    | 8.07 x 3.62  | 4 W     | 538   |    |    |
| ST0209 LED Stainless steel |   | 8.07 x 3.62  | 4 W     | 538   |   |   |
| ST0259 LED                 |  | 9.84 x 3.62  | 6 W     | 807   |  |  |
| ST0259 LED Stainless steel |  | 9.84 x 3.62  | 6 W     | 807   |  |  |
| ST0279 LED                 |  | 16.73 x 5.32 | 9 W     | 1211  |  |  |
| ST0279 LED Stainless steel |  | 16.73 x 5.32 | 9 W     | 1211  |  |  |

# ST0259 Stainless steel

## Recessed Wall Luminaires

5/5



### Mounting Accessories

#### Installation blackout

C1

■ 615-9325 Installation blackout BST25-I

5.12

