


ST0279

Recessed Wall Luminaires

1/5




we-ef

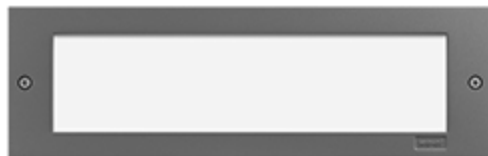

Description

IP66. Recessed steplight for orientation. Suitable for installation in cavity wall construction or concrete pour construction using optional installation blockout. Painted finish.

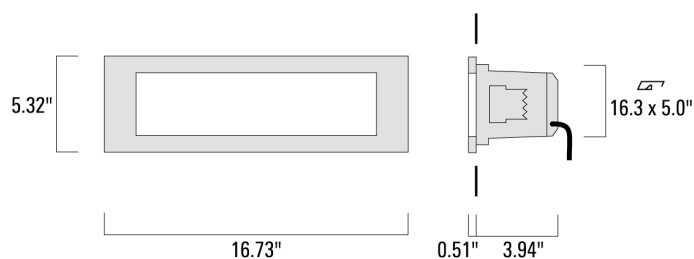

ST0279

Recessed Wall Luminaires

2/5



Specifications

Material Specification

Body:	Marine-grade, die-cast aluminium alloy
Lens:	Polycarbonate lens
Colours:	RAL9004 Black RAL9007 Grey Metallic RAL9016 White RAL8019 Dark Bronze
Gasket:	Silicone rubber gasket
Fasteners:	PCS hardware
Ingress protection:	IP55
Impact protection:	IK10
Corrosion protection:	5CE
Mounting:	Pre-installation blockout is recommended for mounting in concrete, available on request.
Listings:	UL, c UL listed. Suitable for wet locations.

Electrical Specification

Cable:	Two cable entries
--------	-------------------

ST0279

Recessed Wall Luminaires

3/5



Choices

Light Distributions	Lumens	Wattages	Colour Temperatures	Colours
 diffused distribution	1800	24	 3000K	 RAL9004 Black
				 RAL9007 Grey Metallic
				 RAL9016 White
				 RAL8019 Dark Bronze

ST0279

Recessed Wall Luminaires

4/5



we-ef

Configurations

Light Distributions	Part ID	Light Source	Lumen	Gear	Weight	Link
 diffused distribution	615-6631	FT24/ 2G11/OR F27BX/2G11 base	1800	electronic gear	0.00	

Related Families / ST0200

Family		Dimensions	Wattage	Lumen	Links	
					Links	Download Data Sheet
ST0209 LED		8.07 x 3.62	4 W	538		
ST0209 LED Stainless steel		8.07 x 3.62	4 W	538		
ST0259 LED		9.84 x 3.62	6 W	807		
ST0259 LED Stainless steel		9.84 x 3.62	6 W	807		
ST0279 LED		16.73 x 5.32	9 W	1211		
ST0279 LED Stainless steel		16.73 x 5.32	9 W	1211		

ST0279

Recessed Wall Luminaires

5/5



Mounting Accessories

Installation blackout

C1

615-9327 Installation blackout BST27-I

5.20

