



ST0279 LED

Recessed Wall Luminaires

1/5




we-ef

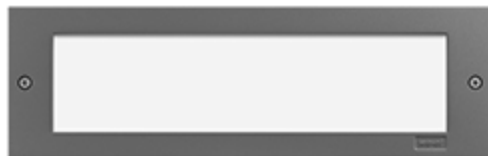

Description

IP66. Recessed LED steplight for orientation. Suitable for installation in cavity wall construction or concrete pour construction using optional installation blockout. Painted finish.

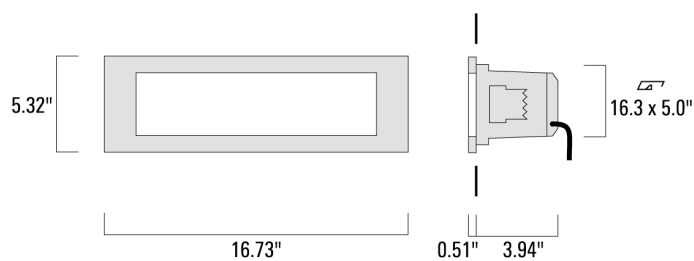

ST0279 LED

Recessed Wall Luminaires

2/5



we-ef

Specifications

Material Specification

Body:	Luminaire body and lens frame constructed in die cast aluminum.
Lens:	Opal polycarbonate lens.
Colours:	RAL9004 Black RAL9007 Grey Metallic RAL9016 White RAL8019 Dark Bronze
Gasket:	Silicone rubber gasket
Fasteners:	PCS polymer coated stainless steel
Ingress protection:	IP66
Impact protection:	IK10
Corrosion protection:	5CE
Surge protection:	1/2 kV
Mounting:	Suitable for installation in cavity wall construction or concrete pour construction using optional installation blockout.
Listings:	ETL listed. Suitable for wet locations.

Electrical Specification

Power supply:	Integral [ECG] electronic 0-10 V dimmable driver in 120 or 277 volt. Specify voltage.
Driver / Ballast:	Integral EC electronic converter
Cable:	Suitable for through wiring.

Lifetime

LED >60,000 h Ta 25°(L70/B10) Control gear >50,000 h Ta 25°

ST0279 LED

Recessed Wall Luminaires

3/5



Choices

Light Distributions	Lumens	Wattages	Colour Temperatures	Colours
 diffused distribution	1211	9	3000 K 4000 K	RAL9004 Black RAL9007 Grey Metallic RAL9016 White RAL8019 Dark Bronze

ST0279 LED

Recessed Wall Luminaires



4/5



Configurations

Light Distributions	Part ID	Light Source	Lumen	Gear	Weight	Link
 diffused distribution	615-6621	LED-9/9W / 350 mA - 3000 K	1211	electronic gear	5.10	
	615-6620	LED-9/9W / 350 mA - 4000K	1211	electronic gear	5.10	

Related Families / ST0200

Family		Dimensions	Wattage	Lumen	Links	
					Links	Download Data Sheet
ST0209 LED		8.07 x 3.62	4 W	538		
ST0209 LED Stainless steel		8.07 x 3.62	4 W	538		
ST0259 LED		9.84 x 3.62	6 W	807		
ST0259 LED Stainless steel		9.84 x 3.62	6 W	807		
ST0279 LED		16.73 x 5.32	9 W	1211		
ST0279 LED Stainless steel		16.73 x 5.32	9 W	1211		

ST0279 LED

Recessed Wall Luminaires

5/5



Mounting Accessories

Installation blackout

C1

■ 615-9327 Installation blackout BST27-I

5.20

