

STN254

Recessed Wall Luminaires

1/5




we-ef



Description

IP55. Recessed steplight for orientation. Suitable for installation in cavity wall construction or concrete pour construction using optional installation blockout.

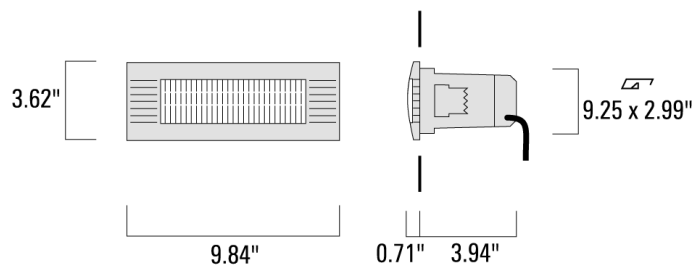

STN254

Recessed Wall Luminaires

2/5



we-ef

Specifications

Material Specification

Body:	Luminaire body and lens frame constructed in die cast aluminum.
Lens:	Prismatic polycarbonate lens.
Colours:	RAL9004 Black RAL9007 Grey Metallic RAL9016 White RAL8019 Dark Bronze
Gasket:	Silicone rubber gasket
Fasteners:	PCS polymer coated stainless steel
Ingress protection:	IP55
Impact protection:	IK10
Corrosion protection:	5CE
Mounting:	Suitable for installation in cavity wall construction or concrete pour construction using optional installation blockout.
Listings:	UL, c UL listed. Suitable for wet locations.

Electrical Specification

Power supply:	Integral [ECG] electronic ballast in 120 or 277 volt. Specify voltage.
Cable:	Suitable for through wiring.

Ambient Temperature

Ta less than 25 deg C

STN254

Recessed Wall Luminaires

3/5



Choices

Light Distributions	Lumens	Wattages	Colour Temperatures	Colours
 asymmetric, forward-throw [A60]	900	13	 3500K	 RAL9004 Black
	1200	18		 RAL9007 Grey Metallic
	1800	26		 RAL9016 White
				 RAL8019 Dark Bronze

STN254

Recessed Wall Luminaires

4/5



Configurations

Light Distributions	Part ID	Light Source	Lumen	Gear	Weight	Link
	615-1531	CFQ18/ G24q-2 base	1200	electronic gear	2.60	
	615-1530	CFQ13/ G24q-1 base	900	electronic gear	2.60	
	615-1532	CFQ26/ G24q-3 base	1800	electronic gear	2.60	

Related Families / STN200

Family		Dimensions	Wattage	Lumen	Links	
					Links	Download Data Sheet
STN204 LED		8.07 x 3.62	4 W	538		
STN254 LED		9.84 x 3.62	6 W	807		

STN254

Recessed Wall Luminaires

5/5



Mounting Accessories

Installation blackout

C1

■ 615-9325 Installation blackout BST25-I

5.12

