


STX259 LED

Recessed Wall Luminaires

1/5




we-ef

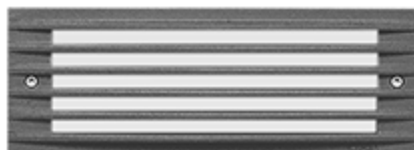

Description

IP55, Class I. Marine-grade die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Polycarbonate main lens. Two cable entries. A pre-installation blockout is available and recommended for mounting in concrete walls. To be ordered separately.

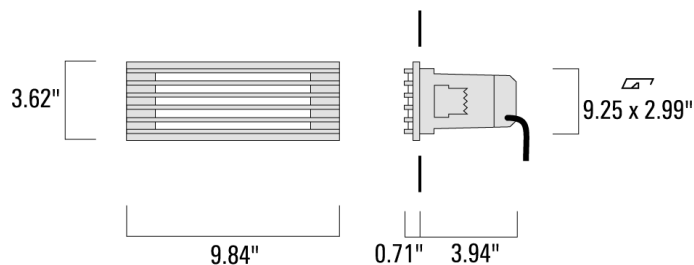

STX259 LED

Recessed Wall Luminaires

2/5



we-ef

Specifications

Material Specification

Body:	Luminaire body and lens frame constructed in die cast aluminum.
Lens:	Opal polycarbonate lens.
Colours:	RAL9004 Black RAL9007 Grey Metallic RAL9016 White RAL8019 Dark Bronze
Gasket:	Silicone rubber gasket
Fasteners:	PCS polymer coated stainless steel
Ingress protection:	IP55
Impact protection:	IK10
Corrosion protection:	5CE
Mounting:	Suitable for installation in cavity wall construction or concrete pour construction using optional installation blockout.
Listings:	ETL listed. Suitable for wet locations.

Electrical Specification

Power supply:	Integral [ECG] electronic 0-10 V dimmable driver in 120 or 277 volt. Specify voltage.
Driver / Ballast:	Integral EC electronic converter
Cable:	Suitable for through wiring.

Lifetime

LED >60,000 h Ta 25°(B10/70)

Control gear >50,000 h Ta 25°

STX259 LED

Recessed Wall Luminaires

3/5



Choices

Light Distributions	Lumens	Wattages	Colour Temperatures	Colours
diffused distribution	807	6	3000 K 4000 K	RAL9004 Black RAL9007 Grey Metallic RAL9016 White RAL8019 Dark Bronze

STX259 LED

Recessed Wall Luminaires

4/5



Configurations

Light Distributions	Part ID	Light Source	Lumen	Gear	Weight	Link
 diffused distribution	615-5221	LED-6/6W / 350 mA - 3000 K	807	electronic gear	2.90	
	615-5220	LED-6/6W / 350 mA - 4000 K	807	electronic gear	2.90	

Related Families / STX200

Family		Dimensions	Wattage	Lumen	Links	
					Links	Download Data Sheet
STX209 LED		8.07 x 3.62	4 W	538		
STX259 LED		9.84 x 3.62	6 W	807		

STX259 LED

Recessed Wall Luminaires

5/5



Mounting Accessories

Installation blackout

C1

■ 615-9325 Installation blackout BST25-I

5.12

