


STX259

Recessed Wall Luminaires

1/5




we-ef

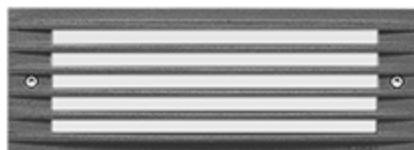

Description

IP55. Recessed steplight for orientation. Suitable for installation in cavity wall construction or concrete pour construction using optional installation blockout.

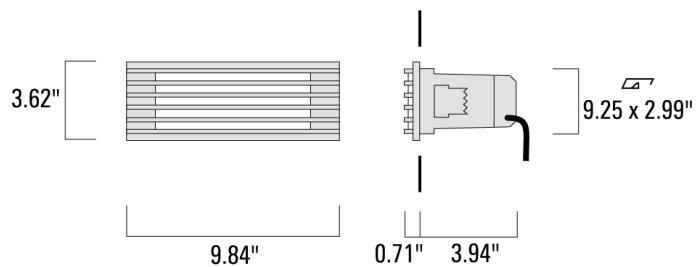

STX259

Recessed Wall Luminaires

2/5



we-ef

Specifications

Material Specification

Body:	Luminaire body and lens frame constructed in die cast aluminum.
Lens:	Opal polycarbonate lens.
Colours:	RAL9004 Black RAL9007 Grey Metallic RAL9016 White RAL8019 Dark Bronze
Gasket:	Silicone rubber gasket
Fasteners:	PCS polymer coated stainless steel
Ingress protection:	IP55
Impact protection:	IK10
Corrosion protection:	5CE
Mounting:	Suitable for installation in cavity wall construction or concrete pour construction using optional installation blockout.
Listings:	UL, c UL listed. Suitable for wet locations.

Electrical Specification

Power supply:	Integral [ECG] electronic ballast in 120 or 277 volt. Specify voltage.
Cable:	Suitable for through wiring.

Ambient Temperature

Ta less than 25 deg C

STX259

Recessed Wall Luminaires

3/5



Choices

Light Distributions	Lumens	Wattages	Colour Temperatures	Colours
 diffused distribution	900 1200 1800	13 18 26	 3500K	 RAL9004 Black  RAL9007 Grey Metallic  RAL9016 White  RAL8019 Dark Bronze

STX259

Recessed Wall Luminaires

4/5



Configurations

Light Distributions	Part ID	Light Source	Lumen	Gear	Weight	Link
 diffused distribution	615-5231	CFQ18/ G24q-2 base	1200	electronic gear	2.90	
	615-5230	CFQ13/ G24q-1 base	900	electronic gear	2.90	
	615-5232	CFQ26/ G24q-3 base	1800	electronic gear	2.90	

Related Families / STX200

Family		Dimensions	Wattage	Lumen	Links	
					Links	Download Data Sheet
STX209 LED		8.07 x 3.62	4 W	538		
STX259 LED		9.84 x 3.62	6 W	807		

STX259

Recessed Wall Luminaires

5/5



Mounting Accessories

Installation blackout

C1

■ 615-9325 Installation blackout BST25-I

5.12

