

PIA260

Surface Mounted Wall Luminaires

1/7




we-ef



Description

IP66, Class I. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Safety glass lens, hinged. Luminaire +/-30° tiltable. Anodised aluminium reflector. Integral ECG control gear.

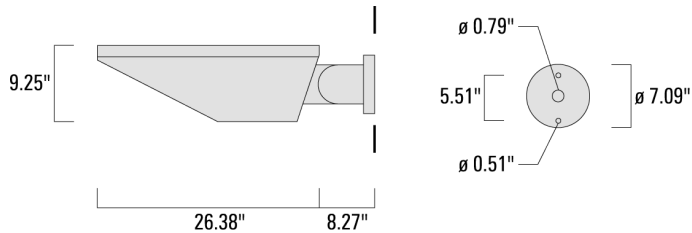

PIA260

Surface Mounted Wall Luminaires

2/7



we-ef

Specifications

Material Specification

Body:	Luminaire body and lens frame constructed in die cast aluminum.
Lens:	Clear tempered glass lens.
Colours:	RAL9004 Black RAL9007 Grey Metallic RAL9016 White RAL8019 Dark Bronze
Gasket:	Silicone rubber gasket
Fasteners:	PCS polymer coated stainless steel
Ingress protection:	IP66
Impact protection:	IK08
Corrosion protection:	5CE
Mounting:	Suitable for installation over a standard 4" recessed junction box. Luminaire can be mounted as an uplight, or downlight.
Listings:	Please contact WE-EF for UL/ETL listing status.

Electrical Specification

Power supply:	Integral [ECG] electronic ballst. CMH 120, 277 or 347 volt. Specify voltage. ELITE CMH 200-277 volt.
Driver / Ballast:	Integral HPF or ECG control gear

Ambient Temperature

Ta less than 25 deg C

PIA260

Surface Mounted Wall Luminaires

3/7



we-ef

Choices

Light Distributions	Lumens	Wattages	Colour Temperatures	Colours
 asymmetric, forward-throw [A60]	22000 24150	210 250	 4000K	 RAL9004 Black
 asymmetric, side throw beam [S]	37800 40000	315 400	 3000K	 RAL9007 Grey Metallic  RAL9016 White  RAL8019 Dark Bronze

PIA260

Surface Mounted Wall Luminaires

4/7



Configurations

Light Distributions	Part ID	Light Source	Lumen	Gear	Weight	Link
 asymmetric, forward-throw [A60]	623-6043	PSMH250 ED-28 (clear)/ HOR/ mogul base	22000	electromagnetic gear, HPF, with ignitor	47.00	
	623-6044	PSMH400 ED-28 (clear)/ HOR/ mogul base	40000	electromagnetic gear, HPF, with ignitor	47.00	
	623-6053	CMH210/ MW T-9/ U/ PGZ18 base	24150	electronic gear	47.00	
	623-6054	CMH315/ MW T-9/ U/ PGZ18 base	37800	electronic gear	47.00	

PIA260

Surface Mounted Wall Luminaires


5/7



Configurations

Light Distributions	Part ID	Light Source	Lumen	Gear	Weight	Link
 asymmetric, side throw beam [S]	623-6541	PSMH250 ED-28 (clear)/ HOR/ mogul base	22000	electromagnetic gear, HPF, with ignitor	47.00	
	623-6542	PSMH400 ED-28 (clear)/ HOR/ mogul base	40000	electromagnetic gear, HPF, with ignitor	47.00	
	623-6553	CMH210/ MW T-9/ U/ PGZ18 base	24150	electronic gear	47.00	
	623-6554	CMH315/ MW T-9/ U/ PGZ18 base	37800	electronic gear	47.00	

Related Families / PIA200


Family		Dimensions	Wattage	Lumen	Links	
					Links	Download Data Sheet
PIA230 LED		16.14 x 9.84	24 -36 W	2951 -4427		
PIA240 LED		22.05 x 12.99	54 -72 W	7020 -10800		



Optical Accessories

Linear louvre [A]

	C1	H1
■ 683-8262 Sidewards cut-off shield IL[A]	344	456



Linear louvre [S]

	H1
■ 683-8261 House-side cut-off shield IL[S]	342



Electrical Accessories

PIA260



we-ef

Surface Mounted Wall Luminaires

7/7

Fusing

■ **697-8001** Fusing