

XLO229 LED

Surface Mounted Wall Luminaires




we-ef

1/5



Description

IP55. Surface mounted wall luminaire. Suitable for installation on ceiling or wall over 4" recessed junction box.

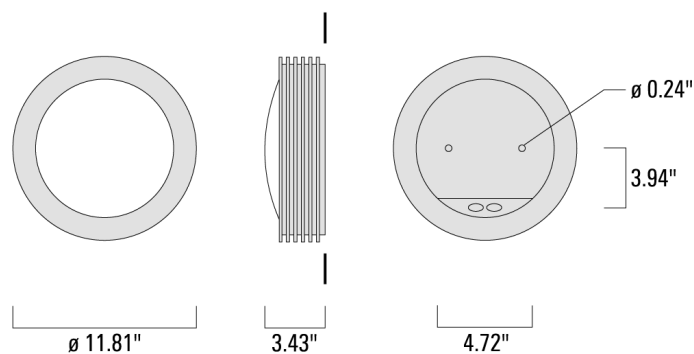

XLO229 LED

Surface Mounted Wall Luminaires



we-ef

2/5

Specifications

Material Specification

Body:	Luminaire body and lens frame constructed in die cast aluminum.
Lens:	Opal polycarbonate lens.
Colours:	RAL9004 Black RAL9007 Grey Metallic RAL9016 White RAL8019 Dark Bronze
Gasket:	Silicone rubber gasket
Fasteners:	PCS polymer coated stainless steel
Ingress protection:	IP55
Impact protection:	IK10
Corrosion protection:	5CE
Surge protection:	1/2 kV
Mounting:	Suitable for installation on wall or ceiling over a standard 4" recessed junction box.
Listings:	Please contact WE-EF for UL/ETL listing status. ADA compliant.

Electrical Specification

Power supply:	Integral [ECG] LED driver in 120 or 277 volt. Specify voltage.
Driver / Ballast:	Integral EC electronic converter
Cable:	Two cable entries

Lifetime

LED >60,000 h Ta 25°(L70/B10) Control gear >50.000 h Ta 25°

XLO229 LED

Surface Mounted Wall Luminaires



3/5

Choices

Light Distributions	Lumens	Wattages	Colour Temperatures	Colours
diffused distribution	2000	12	3000 K 4000 K	RAL9004 Black RAL9007 Grey Metallic RAL9016 White RAL8019 Dark Bronze

XL0229 LED

Surface Mounted Wall Luminaires



4/5

Configurations

Light Distributions	Part ID	Light Source	Lumen	Gear	Weight	Link
 diffused distribution	621-5421	LED-FT 12W (3000K)	2000	electronic gear	7.10	
	621-5422	LED-FT 12W (4000K)	2000	electronic gear	7.10	

Related Families / XL0200

Family		Dimensions	Wattage	Lumen	Links
					Links Download Data Sheet
XL0229 LED		11.81	12 W	2000	   
XL0239 LED		15.75	24 W	3930 -4100	   

XLO229 LED

Surface Mounted Wall Luminaires



we-ef

5/5