

LTP434

Light Columns

1/5




we-ef



Description

IP44, Class I. IK10. Marine-grade aluminium construction. 5CE superior corrosion protection including PCS hardware. Silicone rubber gaskets. Prismatic polycarbonate lenses, 3 x 120° offset. Service door with fused cable connecting box.

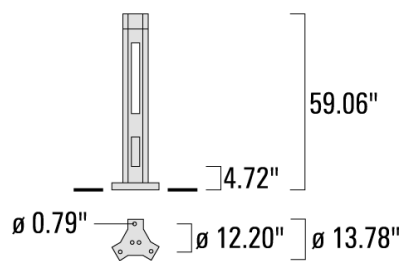

LTP434

Light Columns

2/5



we-ef

Specifications

Material Specification

Body:	Luminaire head, base plate and base plate cover constructed in die cast aluminum
Lens:	Prismatic polycarbonate lenses, 3 x 120° offset
Colours:	RAL9004 Black RAL9007 Grey Metallic RAL9016 White RAL8019 Dark Bronze
Gasket:	Silicone rubber gaskets
Fasteners:	PCS Polymer Coated Stainless Steel Hardware
Ingress protection:	IP44
Impact protection:	IK10
Corrosion protection:	5CE
Mounting:	Light column suitable for installation in landscaped areas on concrete foundations, or in landscaped areas using optional planted root, 697-9306.
Listings:	Please contact WE-EF for ETL/UL listing status

Electrical Specification

Power supply:	Integral [ECG] electronic metal halide ballast, (ANSI C130/ M130/E) for 120, 277 or 347 Volt
Driver / Ballast:	Integral HPF control gear

Ambient temperature

Ta less than 25 deg C

LTP434

Light Columns

3/5



Choices

Light Distributions	Lumens	Wattages	Colour Temperatures	Colours
 three sided light output	3300	35	 3000K	 RAL9004 Black
				 RAL9007 Grey Metallic
				 RAL9016 White
				 RAL8019 Dark Bronze

LTP434

Light Columns

4/5



Configurations

Light Distributions	Part ID	Light Source	Lumen	Gear	Weight	Link
 three sided light output	645-4150	CMH39 T-6/ G-12 base	3300	electronic gear	37.50	

Related Families / LTP400

Family		Dimensions	Wattage	Lumen	Links	
					Links	Download Data Sheet
LTP434 LED-FT		59.01	37 W	5890 -6140		
LTP444 LED-FT		157.48	37 W	5890 -6140		

LTP434

Light Columns


5/5



Mounting Accessories

Planted root

	D1	D2	D3	D4	H1	H2	M1	Weight (lbs)
■ 697-9306 Planted root ESD6	13.78	12.2	4.29	5.24	22.83	19.69	16	22.93 lbs



Electrical Accessories

Fusing

■ 697-8001	Fusing
------------	--------