

LTP434 LED-FT

Light Columns

1/5




we-ef



Description

IP44, Class I. IK10. Marine-grade aluminium construction. 5CE superior corrosion protection including PCS hardware. Silicone rubber gaskets. Prismatic polycarbonate lenses, 3 x 120° offset. Service door with fused cable connecting box.

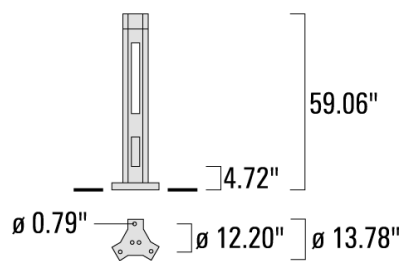

LTP434 LED-FT

Light Columns

2/5



we-ef

Specifications

Material Specification

Body:	Marine-grade, all-aluminium construction
Lens:	Prismatic polycarbonate lenses, 3 x 120° offset
Colours:	RAL9004 Black RAL9007 Grey Metallic RAL9016 White RAL8019 Dark Bronze
Gasket:	Silicone rubber gasket
Fasteners:	PCS Polymer Coated Stainless Steel hardware
Ingress protection:	IP44
Impact protection:	IK10
Corrosion protection:	5CE
Surge protection:	10/10kV
Listings:	ETL listed. Suitable for wet locations.

Electrical Specification

Power supply:	120-277V / 50-60 Hz
Power factor:	> 0.9
Driver / Ballast:	Integral EC electronic converter

Lifetime

LED >60,000 h Ta 25°(L70/B10) Control gear >50,000 h Ta 25°

LTP434 LED-FT

Light Columns

3/5



Choices

Light Distributions	Lumens	Wattages	Colour Temperatures	Colours
 three sided light output	5890	37	3000 K	RAL9004 Black
	6140		4000 K	RAL9007 Grey Metallic
				RAL9016 White
				RAL8019 Dark Bronze

LTP434 LED-FT

Light Columns

4/5



Configurations

Light Distributions	Part ID	Light Source	Lumen	Gear	Weight	Link
 three sided light output	645-4120	LED-FT-37W / 1050 mA - 3000 K	5890	electronic gear	37.50	
	645-4121	LED-FT-37W / 1050 mA - 4000 K	6140	electronic gear	37.50	

Related Families / LTP400

Family		Dimensions	Wattage	Lumen	Links
					Links Download Data Sheet
LTP434 LED-FT		59.01	37 W	5890 -6140	 
LTP444 LED-FT		157.48	37 W	5890 -6140	 

LTP434 LED-FT

Light Columns

5/5



Mounting Accessories

Planted root

	D1	D2	D3	D4	H1	H2	M1	Weight (lbs)
■ 697-9306 Planted root ESD6	13.78	12.2	4.29	5.24	22.83	19.69	16	22.93 lbs

