


FLUXWERX®




100% Dn


CROSS SECTION



DIMENSIONS

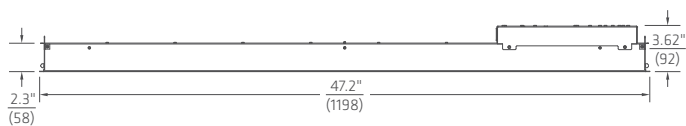

SIDE VIEW



FRONT VIEW

SPECIFICATION DATA
LOOP RECESSED 1x4 (LR1-14)

CATALOG

PROJECT

NOTES

PERFORMANCE SUMMARY

	A	B	C	D
Light (lm)	2700	3150	3800	5050
Energy (W)	19	23	29	38
Efficacy (lm/W)	143	137	134	130
Color Rendering (CRI)	80+			
Color Accuracy (SDCM)	< 2			
L70 Estimate (h)	200,000			150,000
Lumen Maintenance per TM21 (@ 54,000 h)	L90			L88

Summary values are nominal and based on 4000K CCT.

FEATURES

- Fluxwerx radial Anidolic optics provide a precisely controlled 360° symmetrical batwing distribution with no view of the LED point source.
- Complete family of recessed configurations for a multitude of applications and spaces: 1x1, 1x2, 1x4, 2x2, 2x4, plus 6"x1, 6"x1.5, 6"x2 and 6"x4.
- Companion Loop Suspended family allows for an aesthetically connected design language.
- Suitable for T-Bar or Drywall ceilings with a Trim or Trimless Flange. 6" wide versions are compatible with TechZone™ and USG Logix™ ceiling systems.
- The light distribution and high efficacies combine to allow wide fixture spacing with ample general illumination at energy densities less than 0.4 W/ft².



SPECIFICATION DATA

LOOP RECESSED 1x4 (LR1-14)


ORDER GUIDE

1	2	3	4	5	6	OPTIONS	CONTROLS
LR1	14						

1 FAMILY	2 SIZE	3 ENERGY ¹	4 CCT	5 DRIVER
LR1 Loop Recessed	61 6" x 1' (2 loop)	A 9.5 W	30 3000 K 35 3500 K 40 4000 K	F1 Non-Dim F2 0-10 V Dim 3% E1 eldoLED ECO 0-10 V Dim 1% E2 eldoLED SOLO 0-10 V Dim 0.1% E3 eldoLED ECO DALI Dim 1% E4 eldoLED SOLO DALI Dim 0.1% L1 Lutron Hi-Lume 1% EcoSystem (LDE1)
	65 6" x 1.5' (3 loop)	A 12 W B 15 W		
	11 1' x 1'	A 12 W		
	62 6" x 2'	B 15 W		
	12 1' x 2'	C 19 W		
	22 2' x 2'	A 19 W		
	64 6" x 4'	B 23 W		
	▶14 1' x 4'	C 29 W		
	24 2' x 4'	D 38 W		
¹ Nominal input power. Add 4 W for 347 V with E1-4/L1.				

6 VOLTAGE	OPTIONS ³	CONTROLS
M 120-277 V 3 347 V ²	B Battery Pack C Chicago Plenum F 6' Flex Whip H Emergency Switching (GTD or Controller) K1 Drywall Flange Kit - Trim K2 Drywall Flange Kit - Trimless	RE1 Remote Enlighted Smart Sensor VN1 Acuity nLight Converter
² 347 V Driver for F1/F2, 347 V Transformer & Driver for E1-4/L1.	³ BP & GTD available for 120-277 V.	


PRODUCT DETAILS

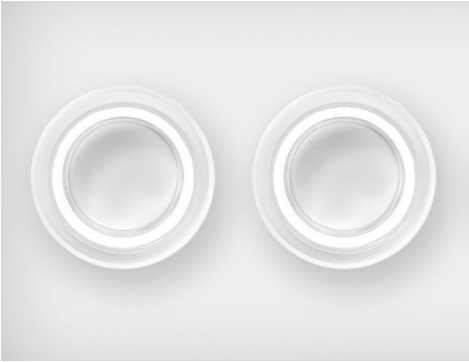


RADIAL ANIDOLIC OPTIC

CEILING INTEGRATION


FLAT GRID

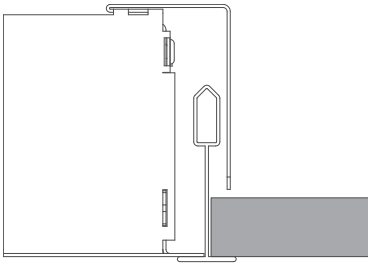


SLOT GRID

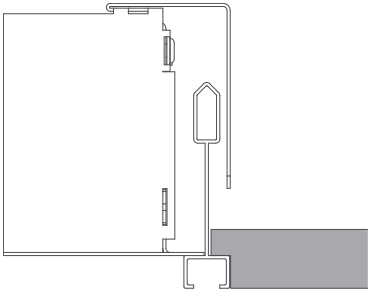

DRYWALL

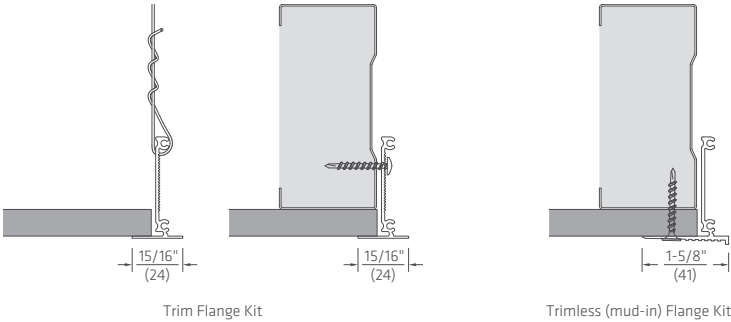

DRYWALL FLANGE KIT

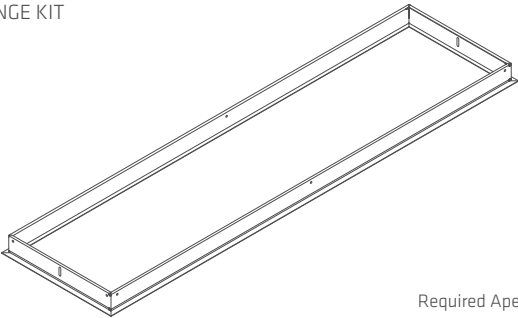

Required Aperture: $\frac{12.5"}{318}$ x $\frac{48.5"}{1232}$

SPECIFICATION DATA
LOOP RECESSED 1x4 (LR1-14)

NOTES

CONSTRUCTION

- Formed 22 ga. steel housing
- Quick wire access plate and integral seismic restraint tabs/tie-offs
- Optional drywall trim or trimless (mud-in) flange kits
- High reflectance diffuse white textured powdercoat

OPTICAL

- Radial Anidolic optical structures with detailed light extraction elements for 360° symmetric batwing distribution
- Precision molded high transmittance clear acrylic lenses
- Long life LED system designed for typical TM21 lumen maintenance \geq L90 @ 54,000 h
- Available in CCTs 3000 K, 3500 K or 4000 K with CRI \geq 80 and R9 \geq 0, all with color accurate binning \leq 2 SDCM

ELECTRICAL

- Integral high efficiency drivers for 50–60 Hz, 120–277 V or 347 V
- Power Factor > 0.90
- Total Harmonic Distortion $< 20\%$
- Dim level: Standard 3%, optional 1% or 0.1%
- Optional Battery Pack delivers 10 W Class 2 rated output for 90 min. Use 12 W input energy to estimate emergency flux, typically 1150–1750 lm (@100–150 lm/W).
- Optional GTD (Generator Transfer Switch), 120–277 V, disables 0–10 V control during emergency for full light output
- Optional flex whip: 6' prewired
- Surge Protection: Meets ANSI C82.11 spec and ANSI/IEEE C62.41
- Inrush Current: Meets NEMA 410

ENVIRONMENTAL & CARE

- Designed for use in dry or damp indoor locations with ambient temperatures of 0–30° C (32–86° F)
- Not suitable for natatorium environments, e.g. swimming pools, hot tubs and saunas. The luminaire may be damaged by chemicals such as chlorine, solvents, ammonia, alcohol or sulfur in the area of operation or in cleaning products. Damage from contaminants is not covered under warranty.
- Clean only by wiping with a slightly water-damp, soft, clean cloth.

WEIGHT

- Maximum 18 lb (8.2 kg) with standard driver
- Maximum 22 lb (10 kg) with battery pack or 347 V transformer

WARRANTY

- 5 year limited warranty on all components and workmanship

INDEPENDENT TESTING

- IESNA LM79
- IESNA LM80 (LED @ 9,000 or 10,000 h)

APPROVALS

- UL Listed (USA + Canada)
- CCEA Chicago Plenum
- IC Rated
- Lighting Facts®
- DesignLights Consortium®
Most options DLC qualified, please check catalog number in the QPL list (www.designlights.org/QPL)

CONTROLS & SENSORS

Fluxwerx products are designed for simple integration with a wide range of sensors, lighting controls and building management systems. Many projects incorporate occupancy sensing, daylight harvesting, individual or central adjustment of light levels and luminaire or space monitoring in order to save energy, reduce costs and maximize occupant comfort. Fluxwerx offers a number of standard driver and controller options to support various wired and wireless network protocols.

enlighted™

Enlighted wireless, networked smart sensor integrates occupancy sensing, daylight harvesting, energy usage, temperature and light level control. Option: Remote Enlighted sensor (RE1), Model: SU-5E-CL

nLIGHT

nLight wired, 2-way network supports luminaire light level control as well as occupancy and daylight sensors. Option: Acuity nLight Converter (VN1), Model: nPS-80-EZ or nPS-80-EZ-ER

eldoLED®

EldoLED drivers support common wired protocols, 0–10 V and DALI. They also provide access to finer dimming control, dynamic white and Bluetooth low-energy (BLE) wireless. Options: ECO 1% (E1), SOLO 0.1% (E2)

LUTRON®

Lutron EcoSystem network protocol enables on/off, dimming, occupancy sensing and daylight harvesting. Option: Hi-Lume 1% EcoSystem (L1), Model: LDE1

legrand® Wattstopper® Pass & Seymour

LEVITON® EATON® DISTECH CONTROLS™

CRESTRON®

SPECIFICATION DATA

LOOP RECESSED 1x4 (LR1-14)

PERFORMANCE DATA


A 19 W	CCT	LIGHT (lm)	ENERGY (W)	EFFICACY (lm/W)	(CRI)	COLOR ACCURACY (R9)	(SDCM)
VERSION LR1-14A40	4000 K	2710	18.95	143	82.8	6.7	< 2
	3500 K	2669	18.95	140.9	82.8	6.7	
REPORT FLUXWERX	3000 K	2629	18.95	138.7	82.8	5.7	

B 23 W	CCT	LIGHT (lm)	ENERGY (W)	EFFICACY (lm/W)	(CRI)	COLOR ACCURACY (R9)	(SDCM)
VERSION LR1-14B40	4000 K	3170	23.16	136.9	82.8	6.7	< 2
	3500 K	3122	23.16	134.8	82.8	6.7	
REPORT FLUXWERX	3000 K	3075	23.16	132.8	82.5	4.5	

C 29 W	CCT	LIGHT (lm)	ENERGY (W)	EFFICACY (lm/W)	(CRI)	COLOR ACCURACY (R9)	(SDCM)
VERSION LR1-14C40	4000 K	3808	28.41	134	82.8	6.7	< 2
	3500 K	3751	28.41	132	82.8	6.7	
REPORT FLUXWERX	3000 K	3694	28.41	130	82.5	4.5	


D 38 W	CCT	LIGHT (lm)	ENERGY (W)	EFFICACY (lm/W)	(CRI)	COLOR ACCURACY (R9)	(SDCM)
VERSION LR1-14D40	4000 K	5026	38.59	130.3	82.8	6.7	< 2
	3500 K	4951	38.59	128.3	82.8	6.7	
REPORT 12156787.09A	3000 K	4876	38.23	127.5	82.5	4.5	

Integrating Sphere and Photometric results at 3000K, 3500K, 4000K scaled from LR1-14 38W (D) and LR1-22 results from an independent accredited testing laboratory per IES LM-79-2008 and ANSI C78.377-2011. Candlepower Distribution scaled per total lumens of Integrating Sphere results.




100% Dn
Loop Recessed
1' x 4'
4000 K

LR1-14A30

LED lighting facts	
Light Output (Lumens)	2629
Watts	18.95
Lumens per Watt (Efficacy)	138.73
Color Accuracy Color Rendering Index (CRI)	82
Light Color Correlated Color Temperature (CCT)	3000 (Bright White)
	
<small>All results are according to IESNA LM-79-2008. Approved Method for the Electrical and Photometric Testing of Solid-State Lighting.</small>	
<small>Visit www.lightingfacts.com for the Label Reference Guide.</small>	
<small>Registration Number: XAAR-735041 (2/28/2018)</small>	
<small>Model Number: LR1-14A30/1F3E1E3E3E49f</small>	
<small>Type: Luminaires - Traffic/Exit Ceiling</small>	

LR1-14D40

LED lighting facts	
Light Output (Lumens)	5026
Watts	38.59
Lumens per Watt (Efficacy)	130.24
Color Accuracy Color Rendering Index (CRI)	82
Light Color Correlated Color Temperature (CCT)	4000 (Bright White)
	
<small>All results are according to IESNA LM-79-2008. Approved Method for the Electrical and Photometric Testing of Solid-State Lighting.</small>	
<small>Visit www.lightingfacts.com for the Label Reference Guide.</small>	
<small>Registration Number: XAAR-GJ20F4 (2/28/2018)</small>	
<small>Model Number: LR1-14D40/1F3E1E3E3E49f</small>	
<small>Type: Luminaires - Traffic/Exit Ceiling</small>	