

Steelcase®
HEALTH

Sonata™ - Replacing a Top on Islands,



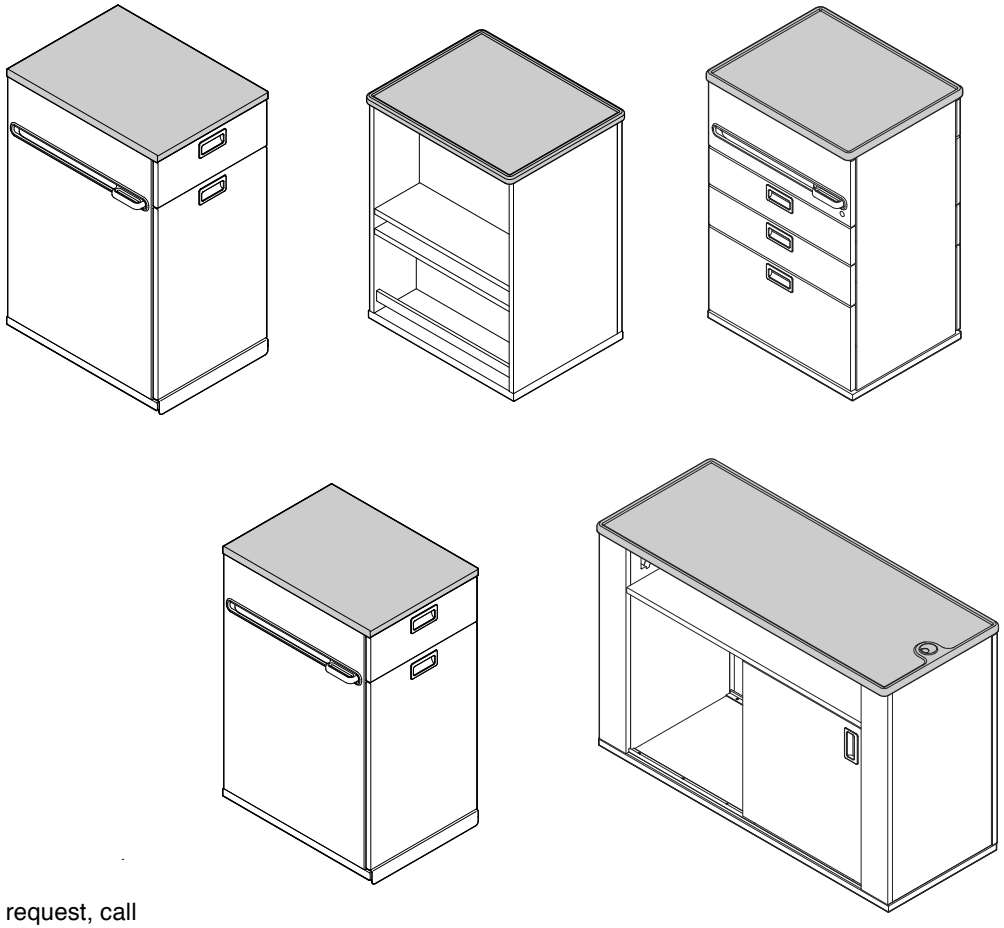



Wood Glue

If you have a problem, question, or request, call your local dealer, or Steelcase Line 1 at **888.STEELCASE** (888.783.3522) for immediate action by people who want to help you.

(Outside the U.S.A., Canada, Mexico, Puerto Rico, and the U.S. Virgin Islands, call: 1.616.247.2500)
Or visit our website: www.steelcase.com


© 2014 Steelcase Inc.
Grand Rapids, MI 49501
U.S.A.

Printed in U.S.A.

Steelcase
HEALTH

Removing a Top from a Single-sided Nurse Server Module

1. Remove back panel (1a) then remove remaining wood dowels (1b).

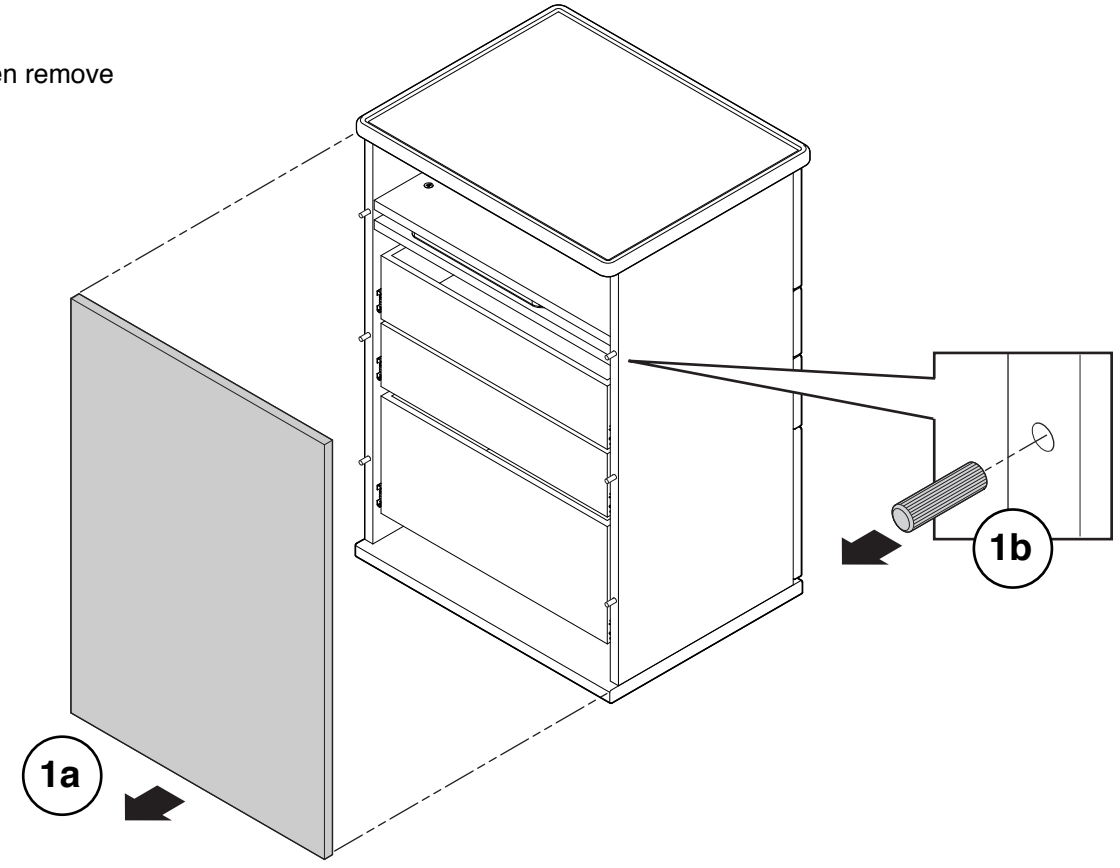


Steelcase
HEALTH


2. Locate the four (4) cams on inside of single-sided nurse server. Turn cam lock with screwdriver 1/4 turn to left to release connecting bolt.


3. Remove top (3a). Remove and replace wood dowels (3b) if necessary.


4. Install new top by first installing four (4) cam bolts into holes on underside of top.

5. Replace back panel, removed in step 1, using wood glue on wood dowels.

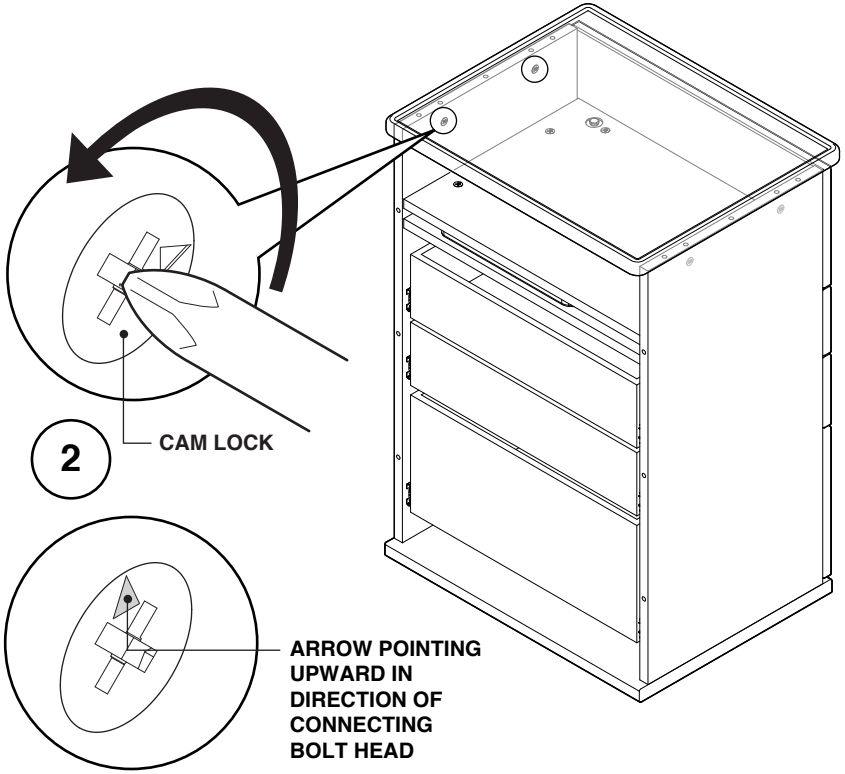

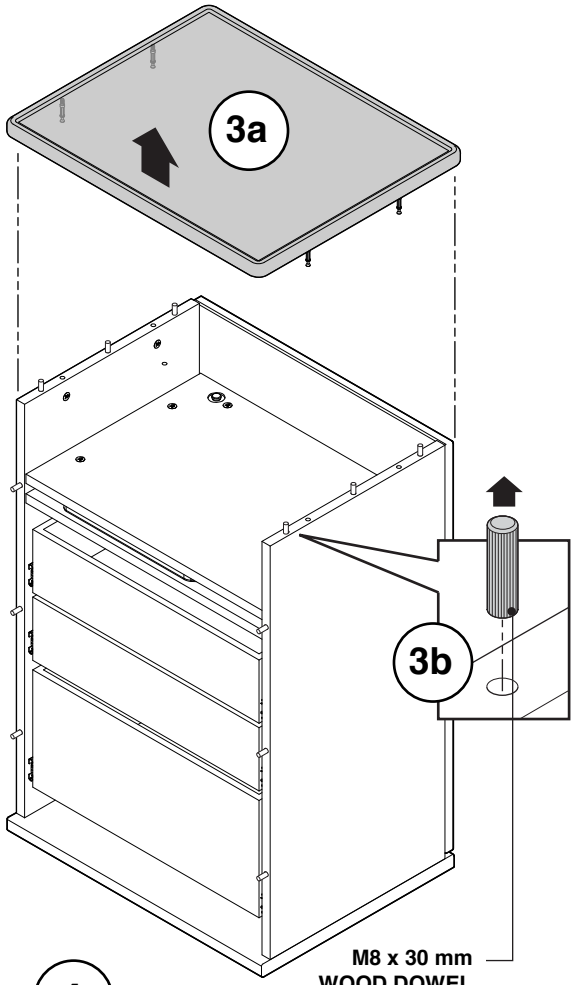

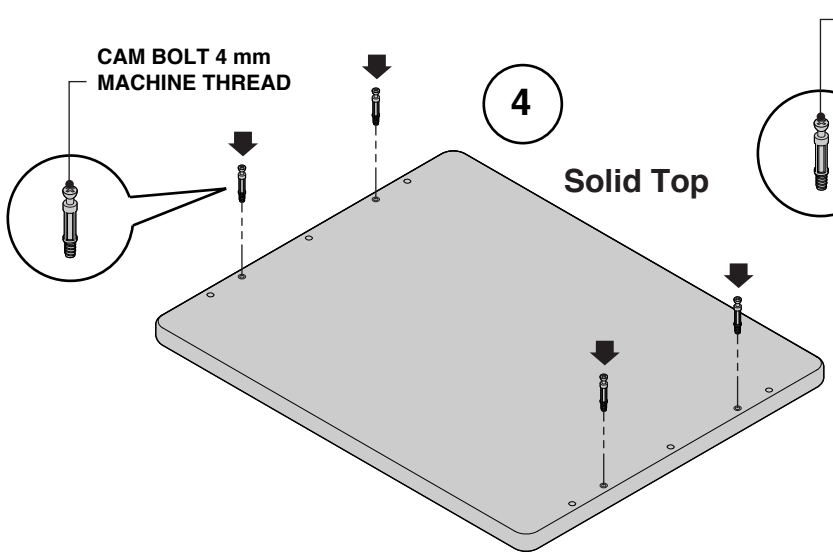

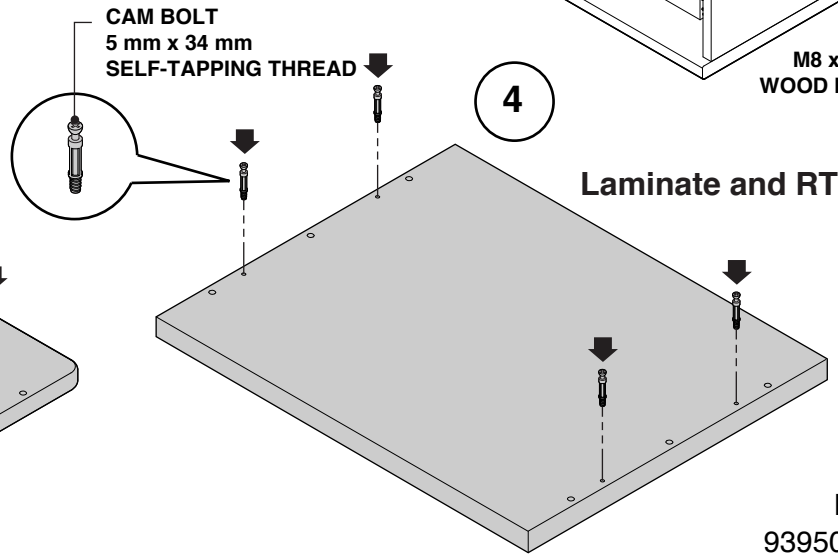

Steelcase
HEALTH


Removing a Top from a Double-Sided Nurse Server Module


1. Push on tab on both sides of drawer and remove top drawer.


2. Locate the four (4) cams on sides of nurse server. Turn cam lock with screwdriver 1/4 turn to left to release connecting bolt.

3. Remove top (3a). Remove and replace wood dowels (3b) if necessary.

4. Install new top by first installing four (4) cam bolts into holes on underside of top as shown on page 3.

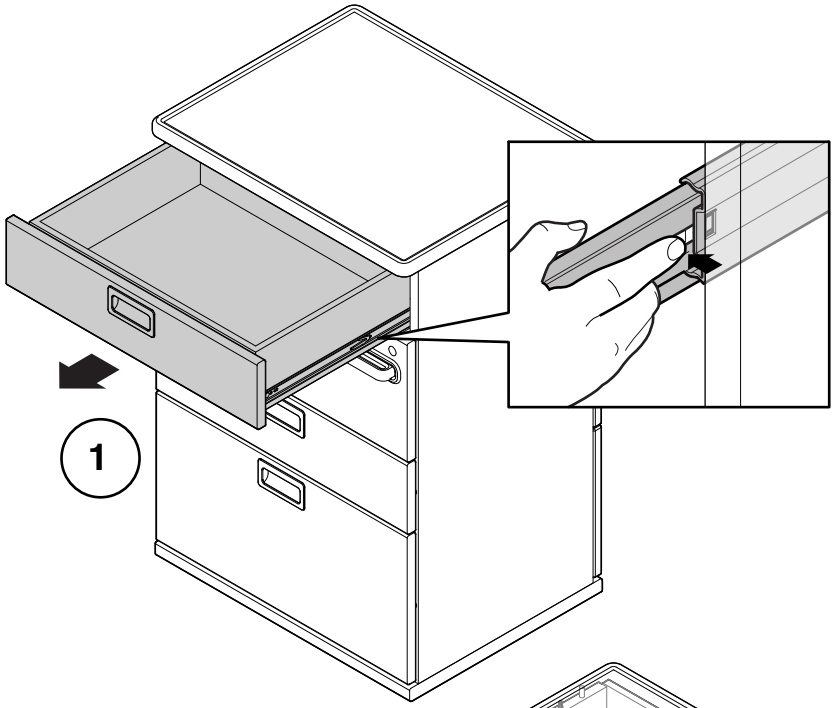

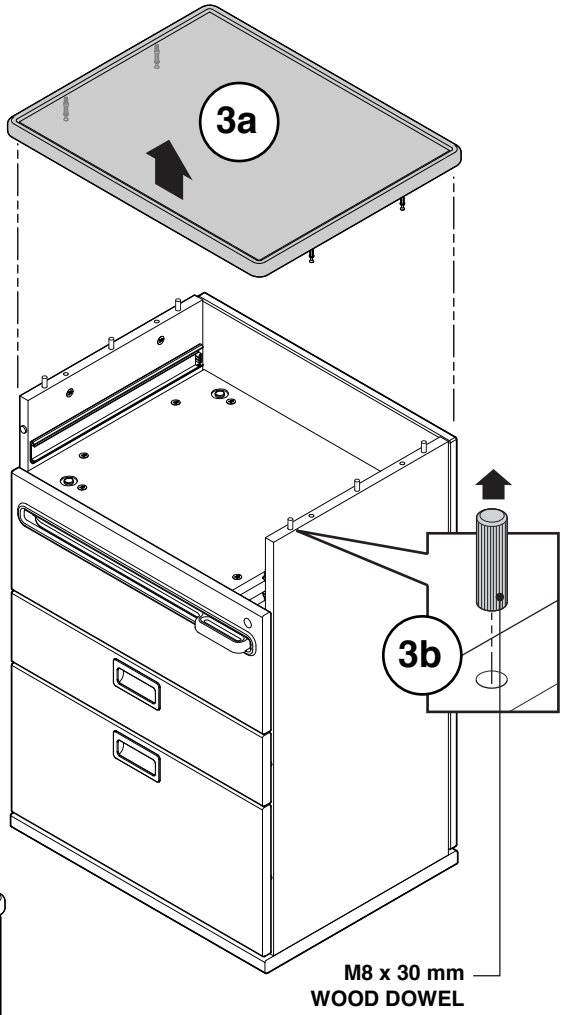

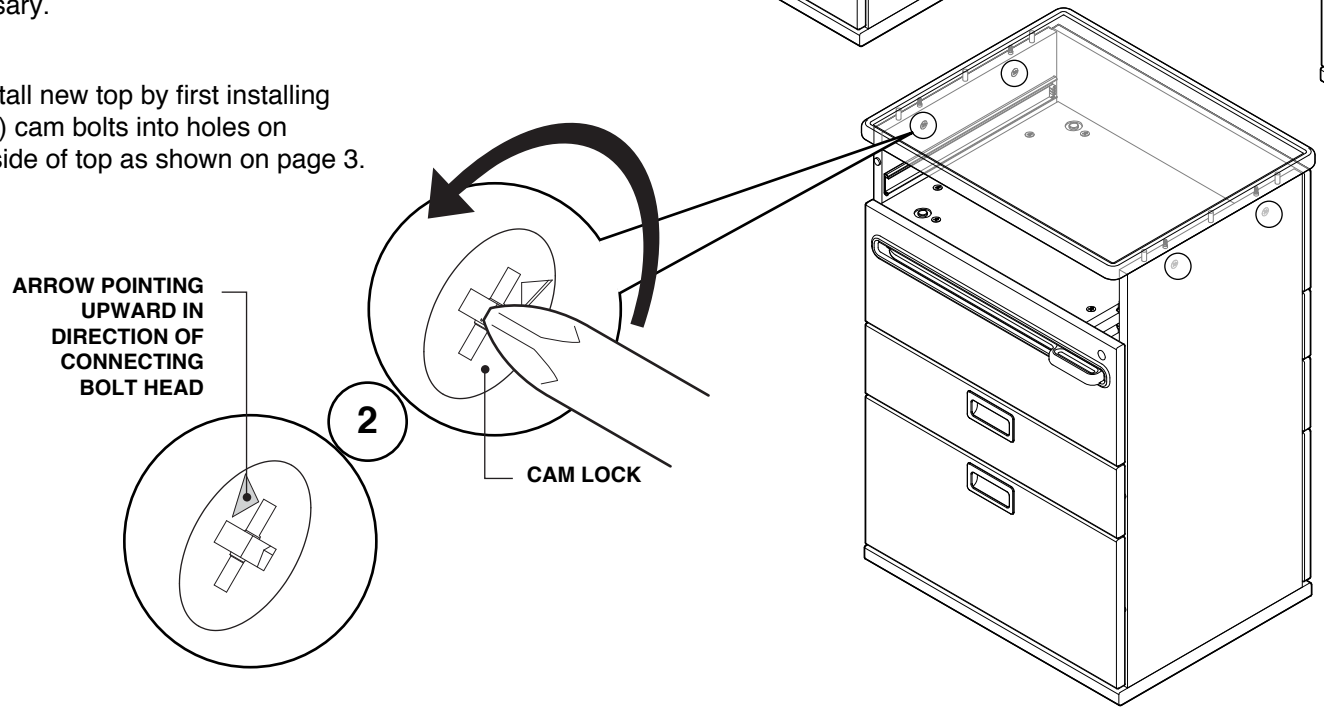

Steelcase
HEALTH


Removing a Top from a Nurse Server Module with Trash


1. Push on tab on both sides of drawer and remove top drawer.


2. Locate the five (5) cams on sides and rear of nurse server. Turn cam lock with screwdriver 1/4 turn to left to release connecting bolt.

3. Remove top (3a). Remove and replace wood dowels (3b) if necessary.

4. Install new top by first installing five (5) cam bolts into holes on underside of top as shown on page 3.

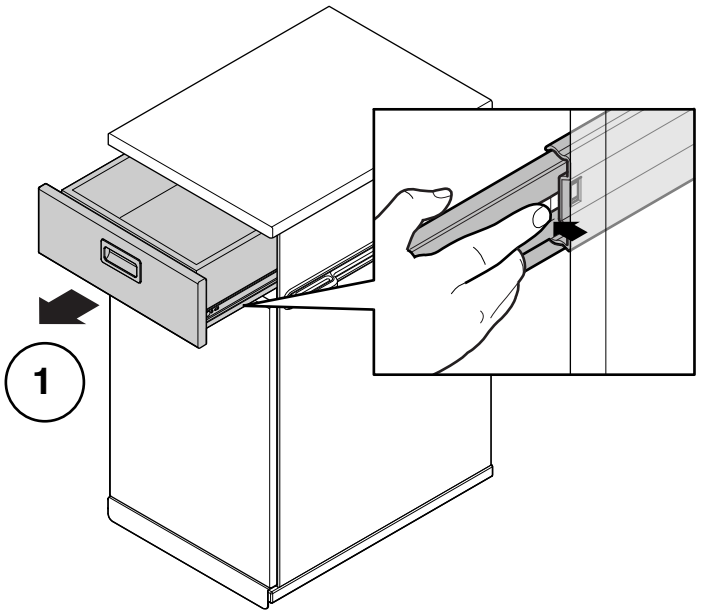

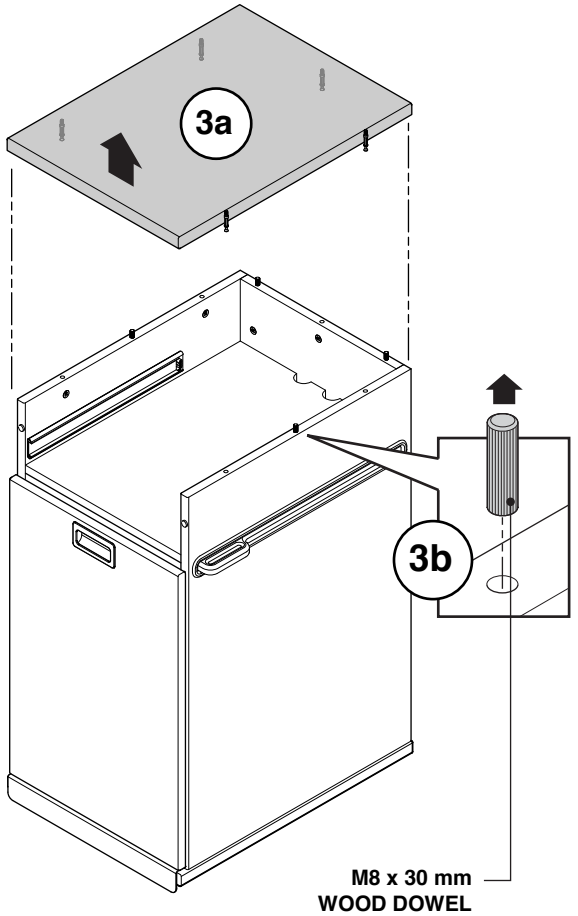

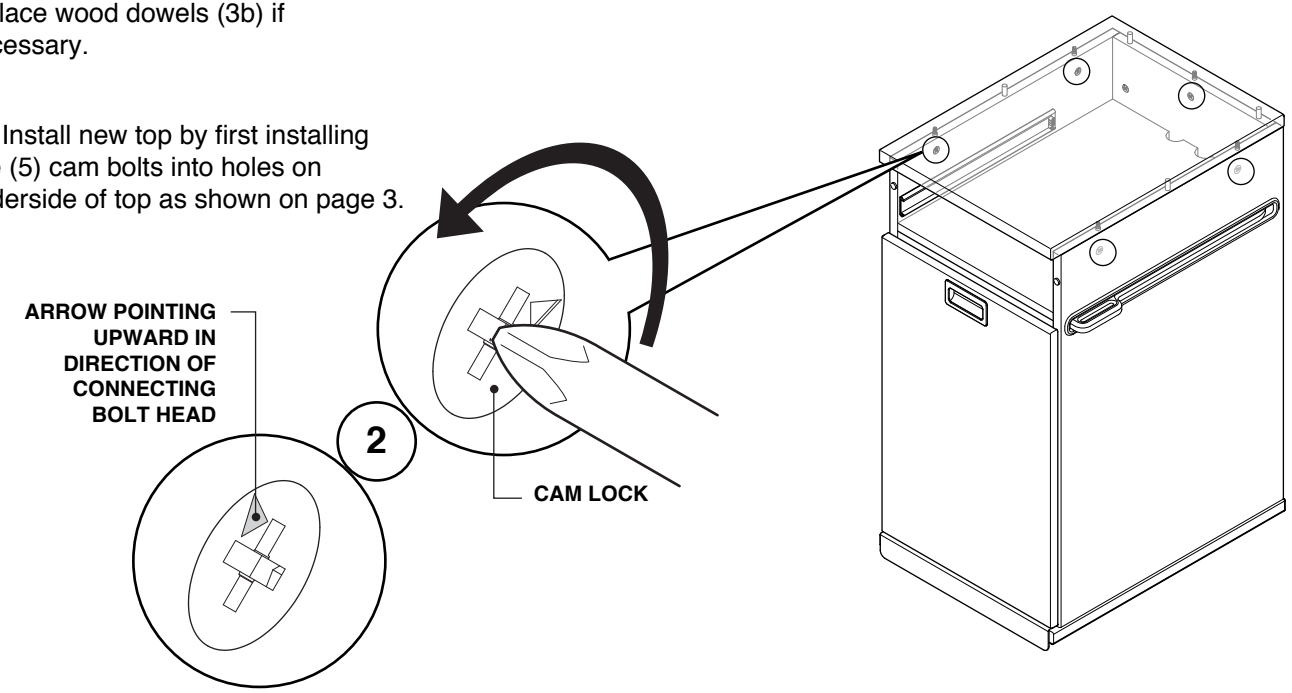


Steelcase
HEALTH

Removing a Top from a Double-sided Island Module

1. Locate the four (4) cams on inside of island. Turn cam lock with screwdriver 1/4 turn to left to release connecting bolt.

2. Remove top (2a). Remove and replace wood dowels (2b) if necessary.

3. Install new top by first installing four (4) cam bolts into holes on underside of top as shown on page 3.

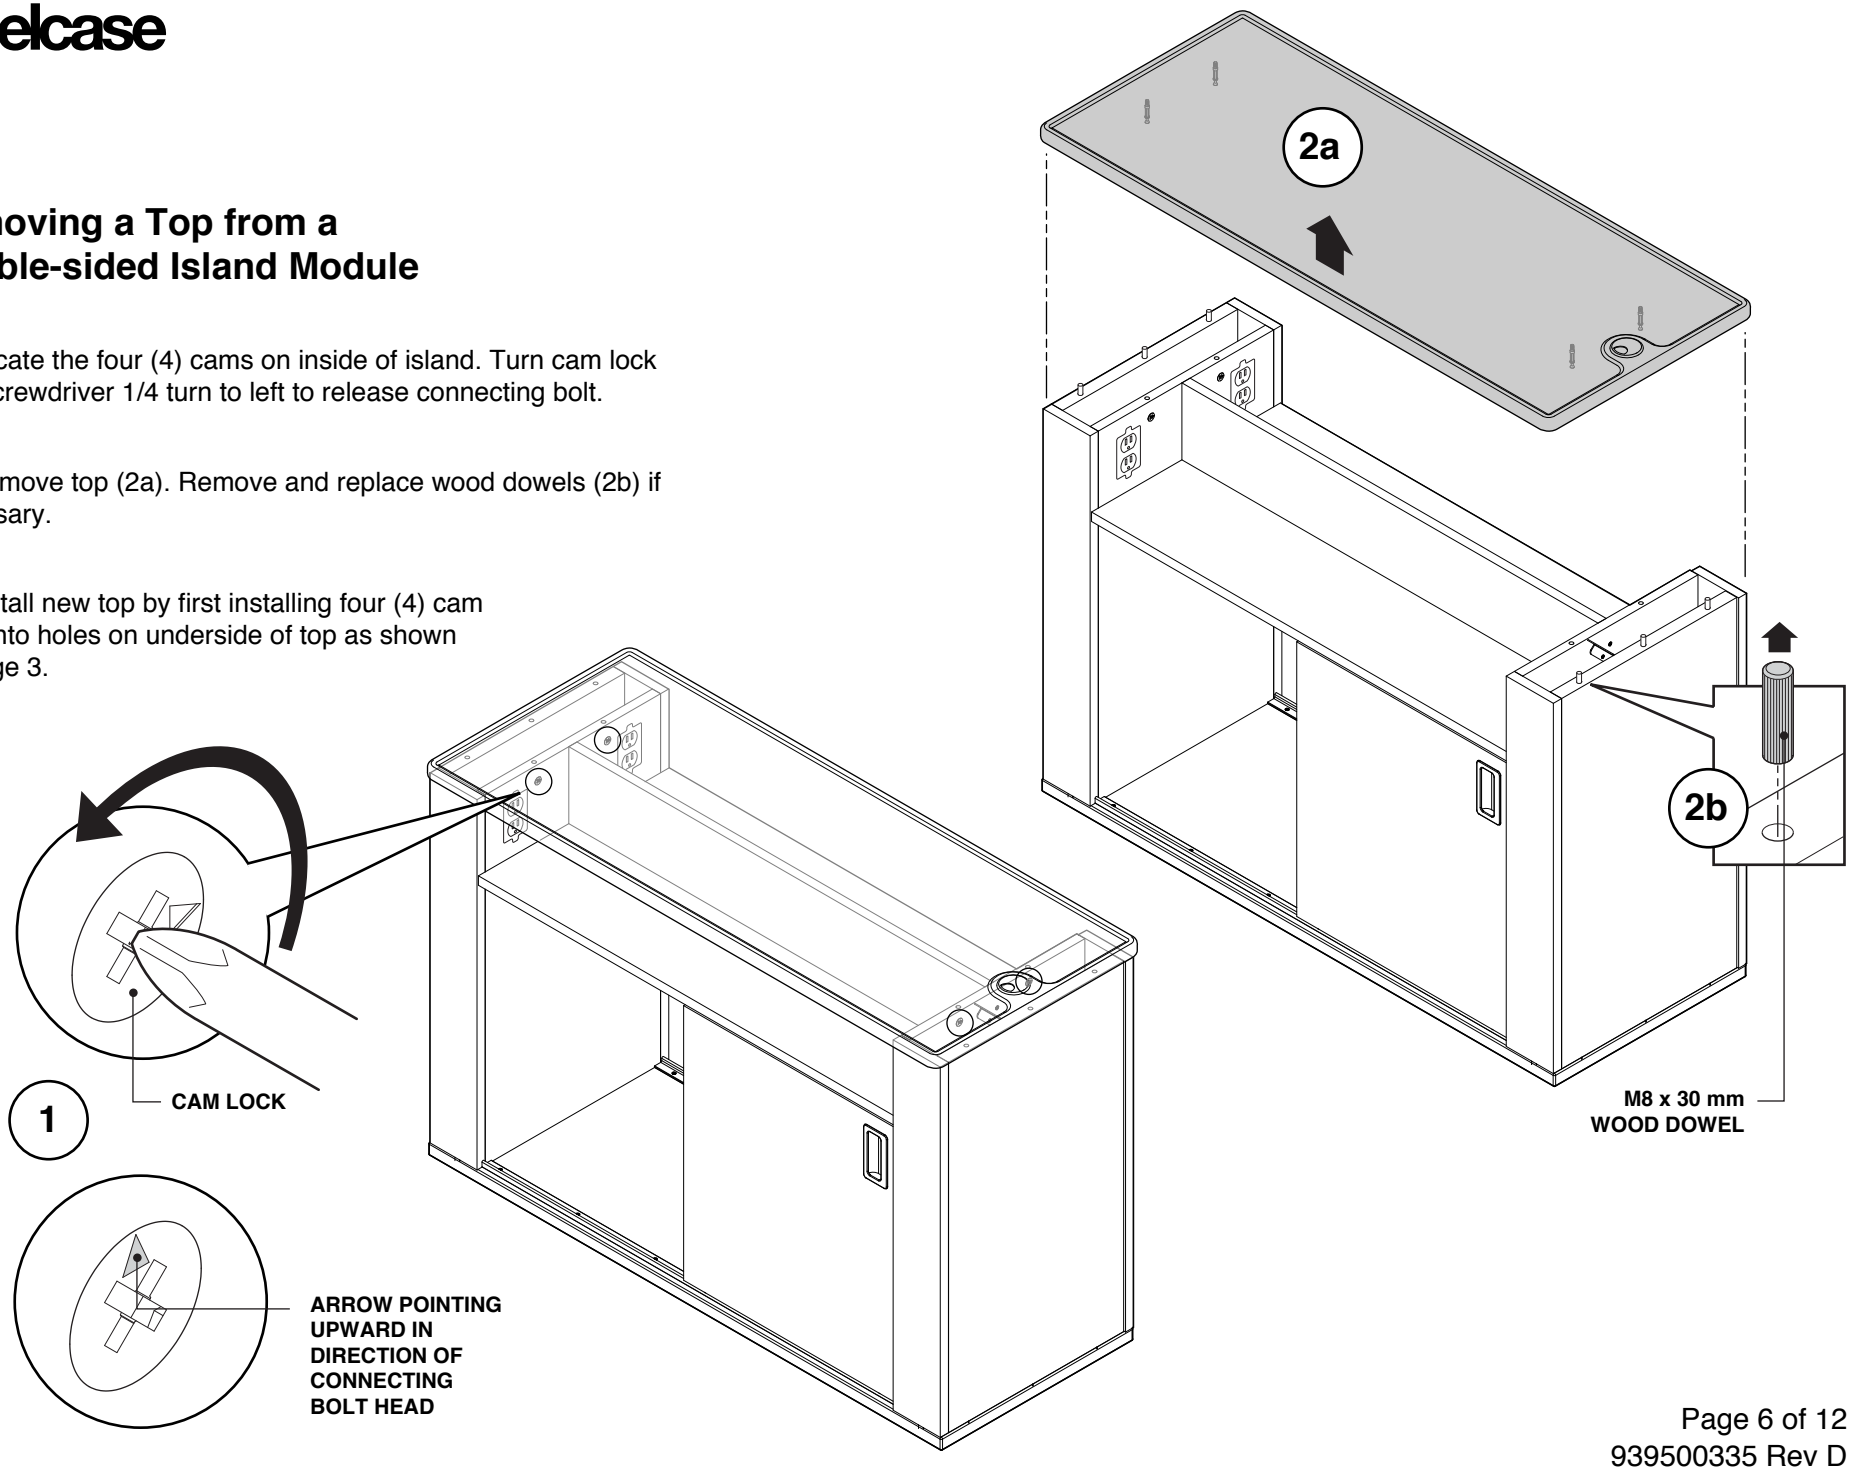


Steelcase
HEALTH


Removing a Top from a Double-sided 36” Island Module

1. Locate the four (4) cams on inside of island. Turn cam lock with screwdriver 1/4 turn to left to release connecting bolt.

2. Remove top (2a). Remove and replace wood dowels (2b) if necessary.

3. Install new top by first installing four (4) cam bolts into holes on underside of top as shown on page 3.

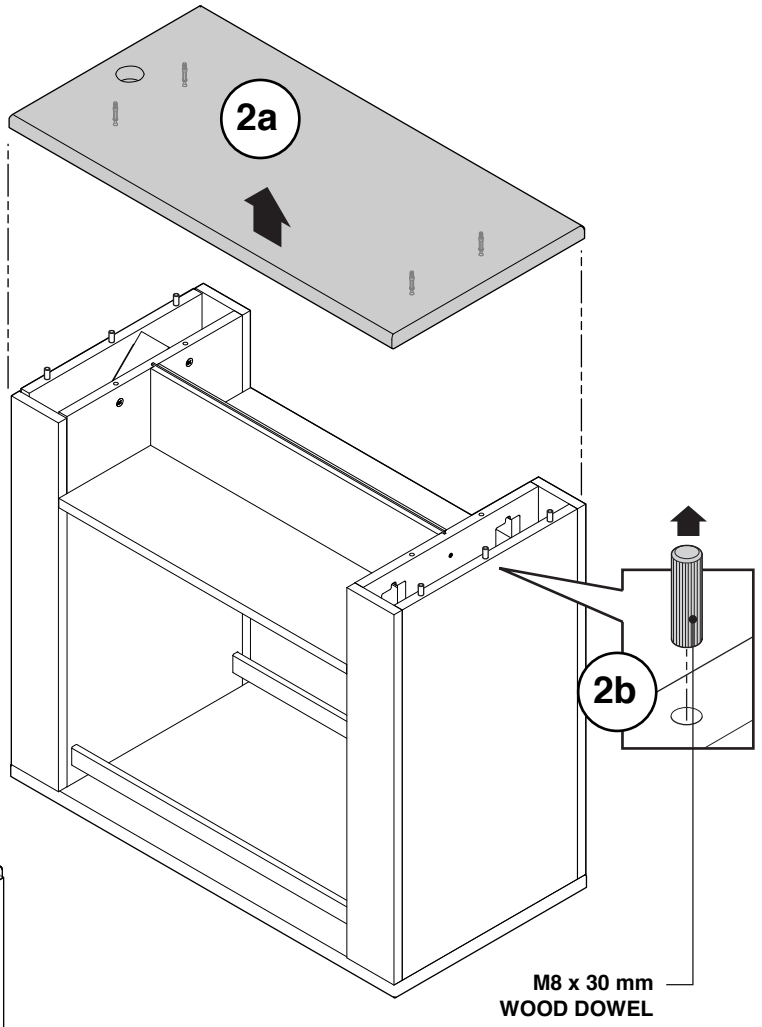

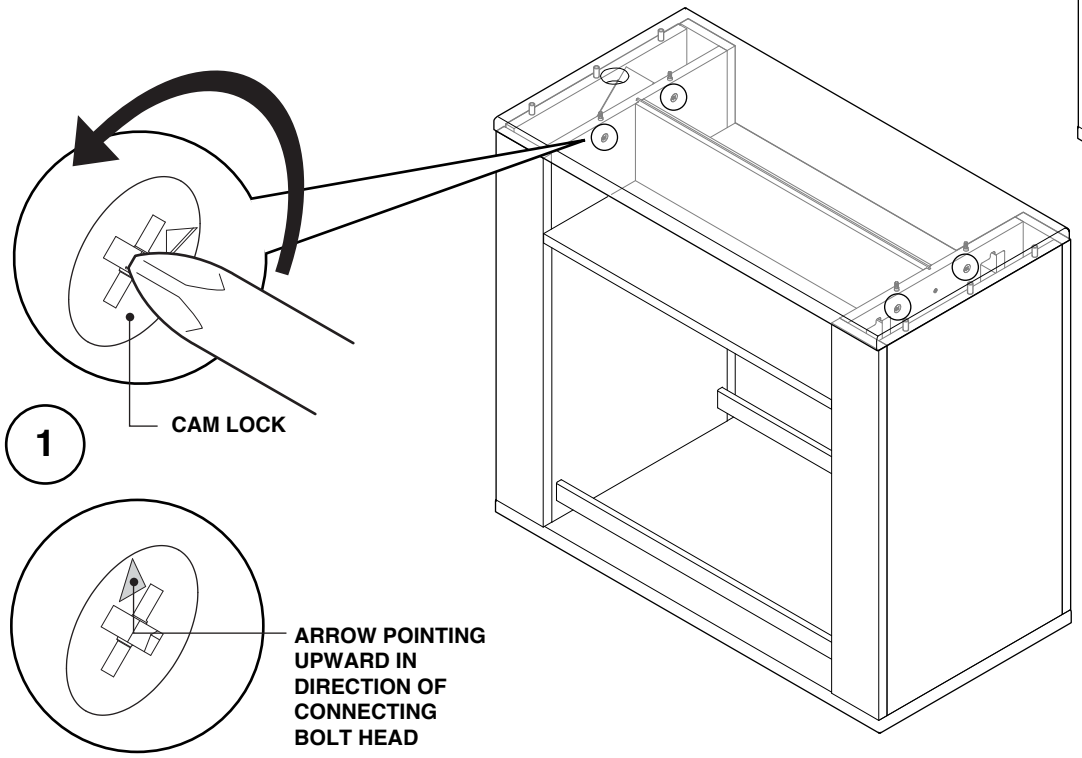


Steelcase
HEALTH


Removing a Top from a Single-sided Island Module

1. Locate the four (4) cams on the inside of single-sided island. Turn cam lock with screwdriver 1/4 turn to left to release connecting bolt.

2. Remove top (2a). Remove and replace wood dowels (2b) if necessary.

3. Install new top by first installing four (4) cam bolts into holes on underside of top as shown on page 3.

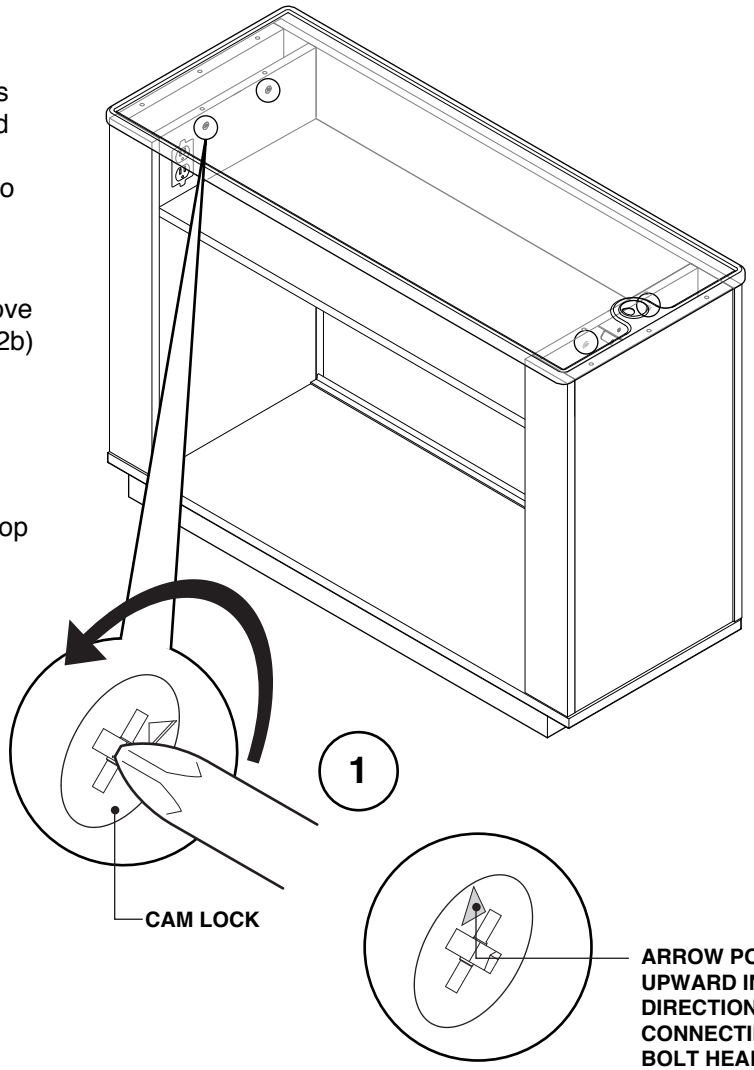

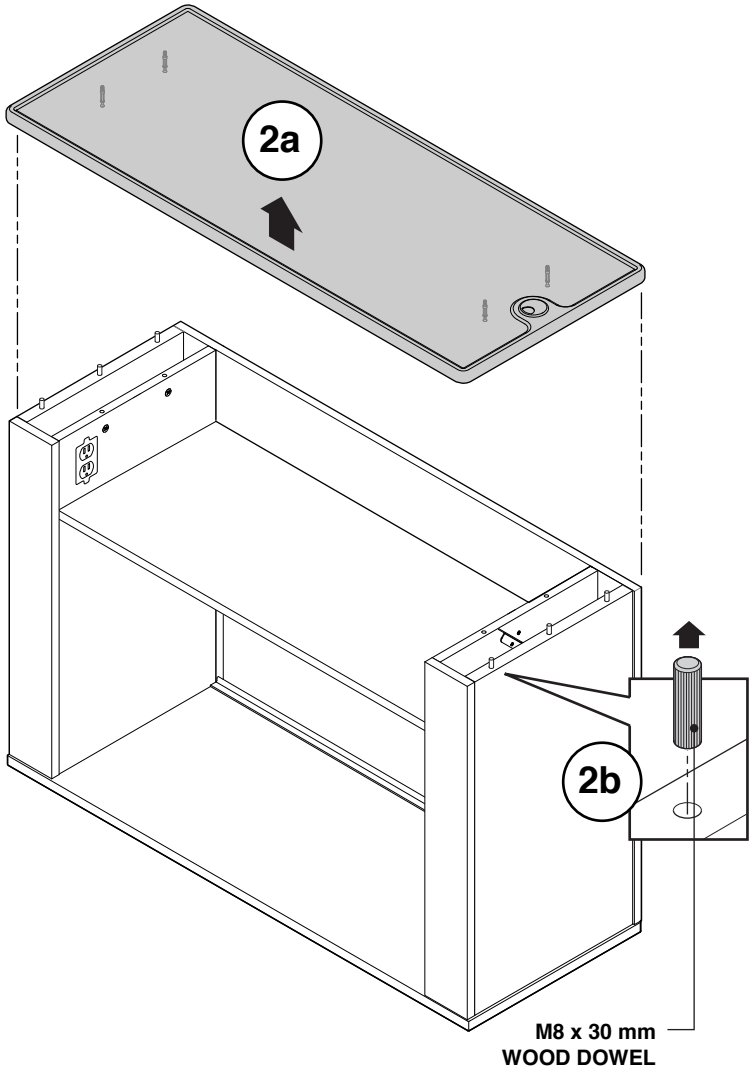


Steelcase
HEALTH

Removing a Top from a Single-sided 36” Island Module

1. Locate the four (4) cams on the inside of single-sided 36” island. Turn cam lock with screwdriver 1/4 turn to left to release connecting bolt.

2. Remove top (2a). Remove and replace wood dowels (2b) if necessary.


3. Install new top by first installing four (4) cam bolts into holes on underside of top as shown on page 3.

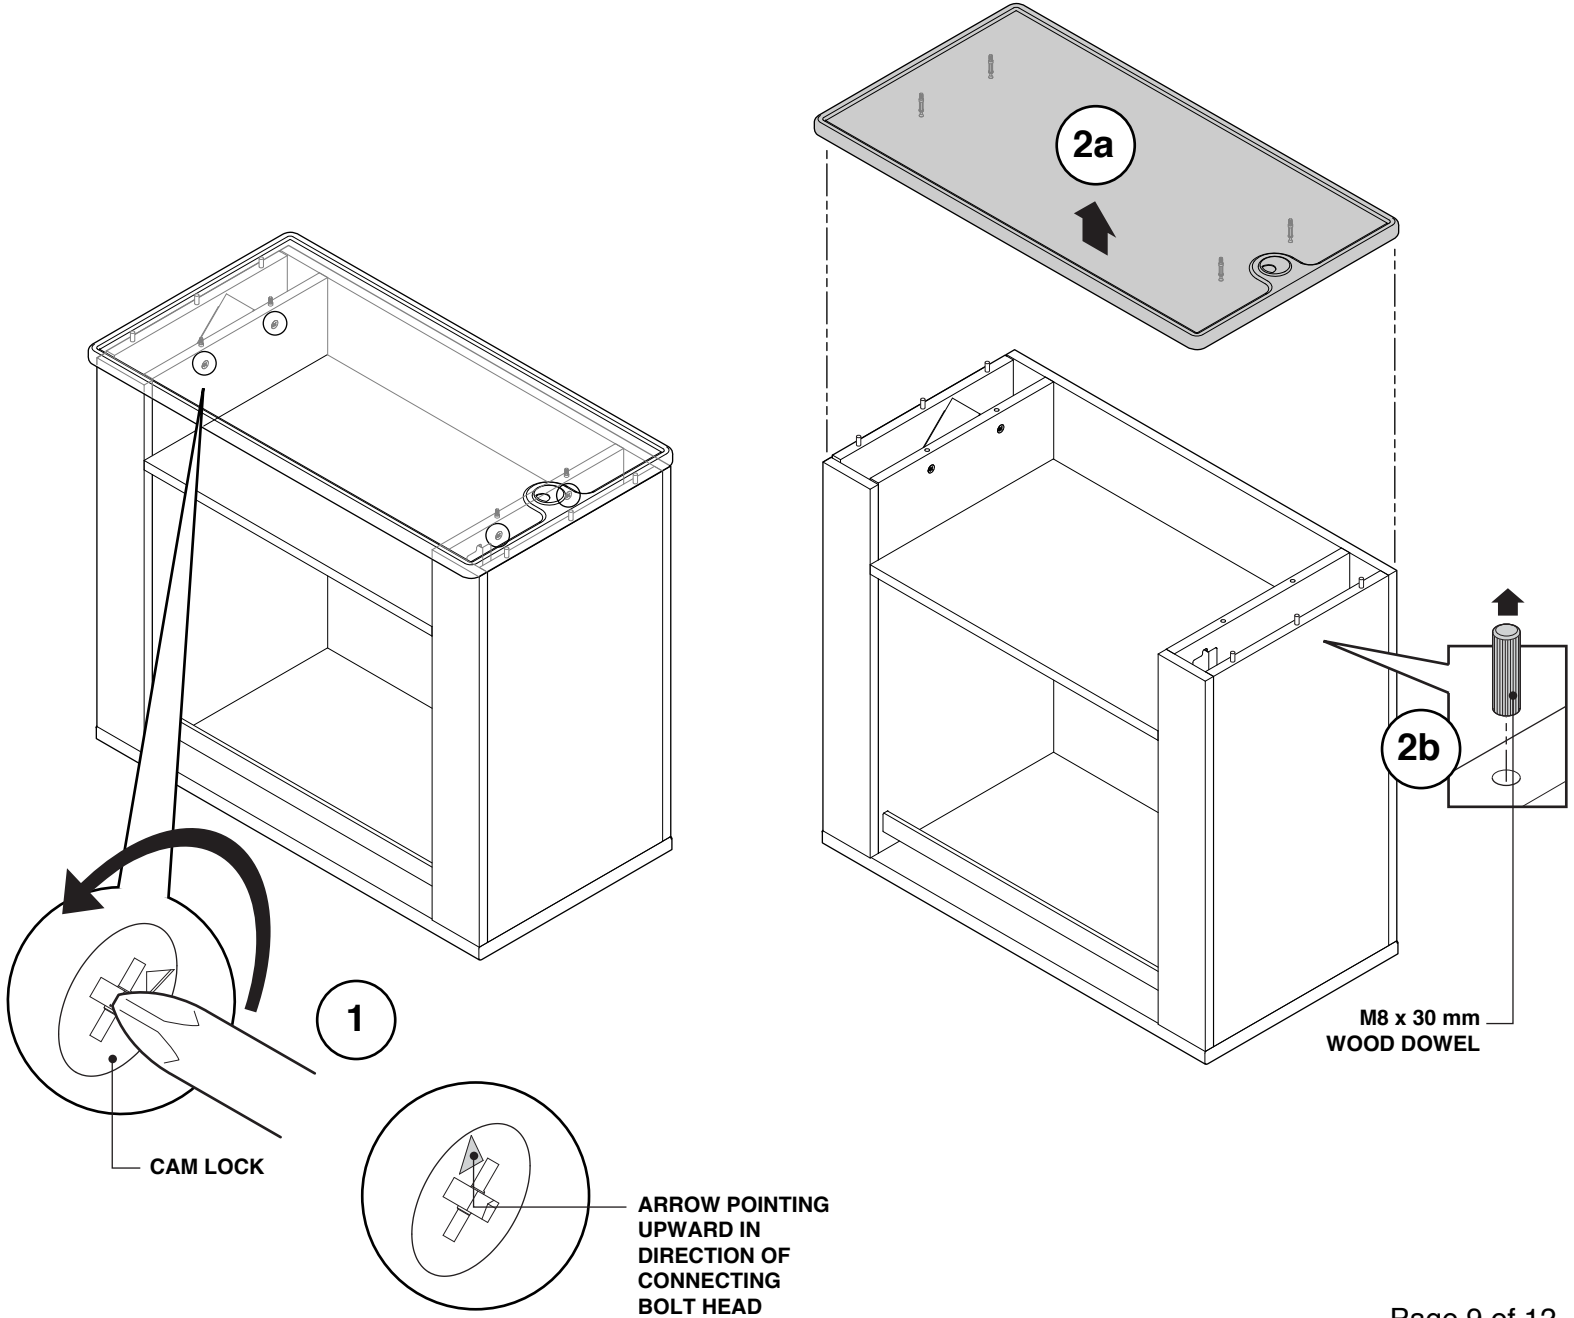

Steelcase
HEALTH

Removing a Top from a Single-sided Media Module

1. Remove back panel (1a) then remove remaining wood dowels (1b).

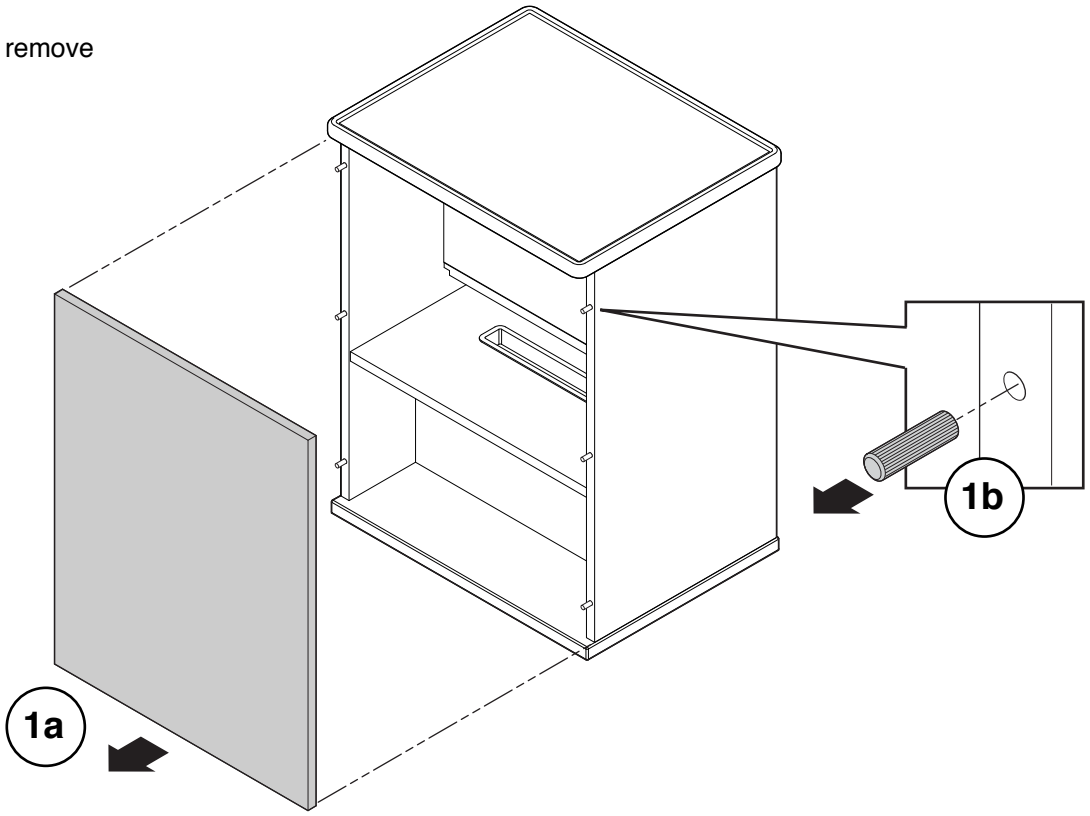


Steelcase
HEALTH


2. Locate the four (4) cams on inside of single-sided media module. Turn cam lock with screwdriver 1/4 turn to left to release connecting bolt.

3. Remove top (3a). Remove and replace wood dowels (3b) if necessary.

4. Install new top by first installing four (4) cam bolts into holes on underside of top as shown on page 3.

5. Replace back panel, removed in step 1, using wood glue on wood dowels.

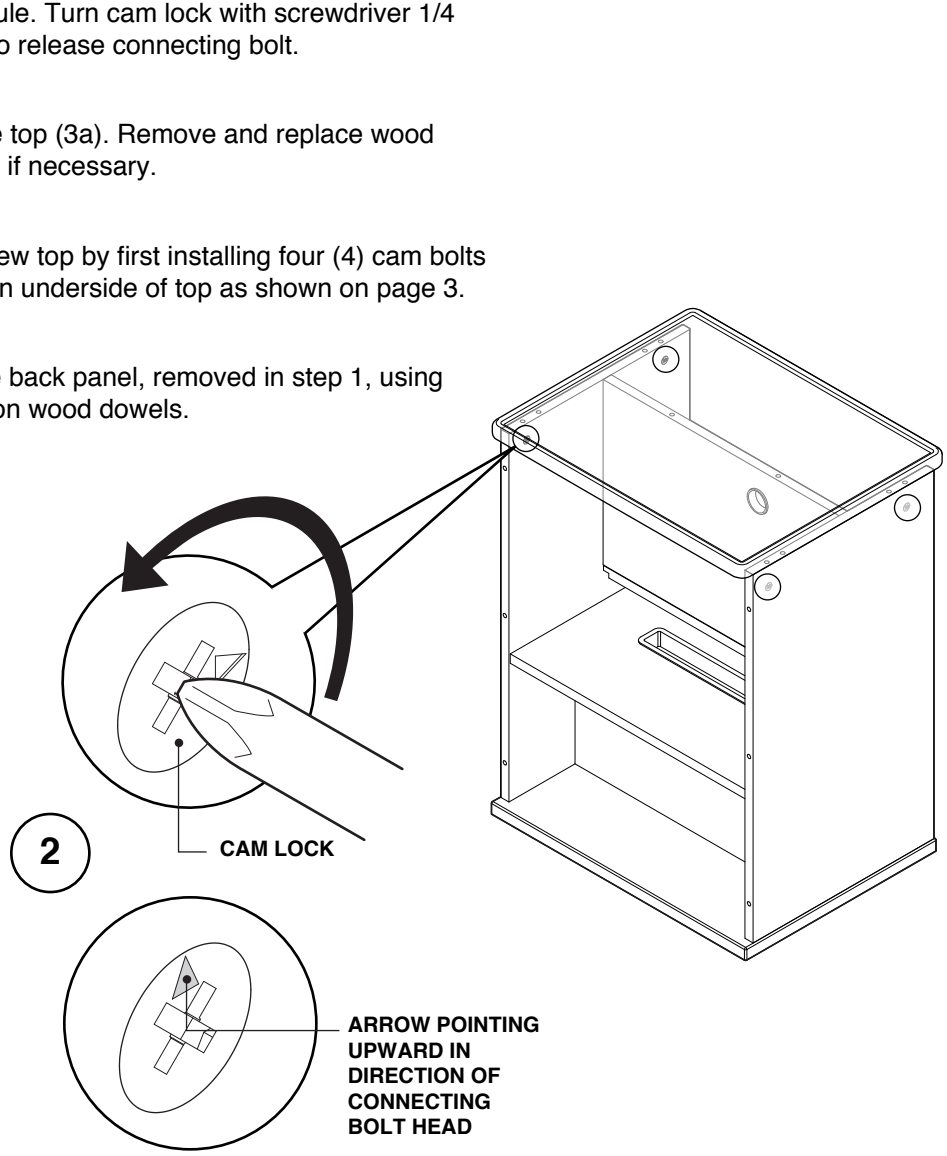

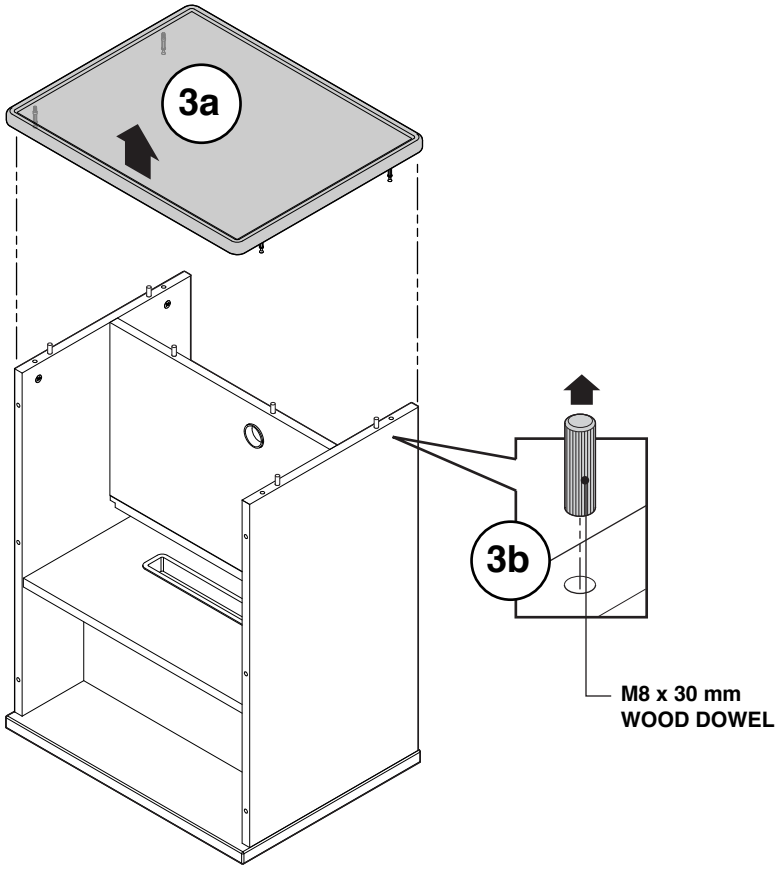

Steelcase
HEALTH

Removing a Top from a Double-sided Media Module

1. Locate the four (4) cams on sides of double-sided media module. Turn cam lock with screwdriver 1/4 turn to left to release connecting bolt.

2. Remove top (2a). Remove and replace wood dowels (2b) if necessary.

3. Install new top by first installing four (4) cam bolts into holes on underside of top as shown on page 3.

