



Project _____


Type _____

Notes _____


PERFORMANCE AT 3500K

NOMINAL LUMEN OUTPUT	INPUT WATTS*	EFFICACY
3200 lm	29.22 W	112 lm/W
4000 lm	37.4 W	107 lm/W

* Based on a 2'x4' luminaire using one driver
Please consult factory for custom lumen output and wattage.

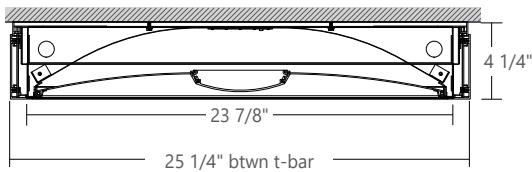

SECTION VIEW

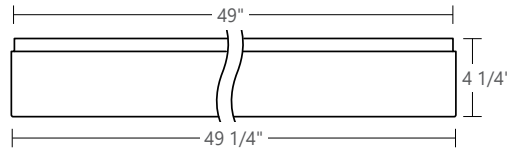

SIDE VIEW



*Check the latest update on the DLC website for complete information. Not all versions may be DLC qualified. See page 2 for DLC Approved options



cULus Listed
Type I.C.



CONTROL
SENSORS

Ordering Guide

PRODUCT ID	SIZE	NOMINAL LUMENS	CRI	COLOR TEMP.	SHIELDING	FINISH
DAYFLED DAY flat LED	24 2'X4'	3200 3200 lm - Minimum	80 80 CRI	27 2700 K	SO spotless lens	W white
DAYCLED DAY curve LED		6000 6000 lm - Maximum	90 90 CRI	30 3000 K		BLK black
				35 3500 K		C custom
				40 4000 K		
Outputs between listed min and max are available. Consult factory for outputs outside of the listed range.						

VOLTAGE	DRIVER	CIRCUITS	MOUNTING/SUSPENSION	BATTERY (OPTIONAL)
120 120 V	DP dimming (0-10V) 1%	1 1 circuit	SM surface mount	B# battery Pack
277 277 V	LT Lutron ⁽¹⁾	+E(#) emergency circuit ⁽³⁾		
347 347 V	BI bi-level dimming	+NL(#) night light circuit ⁽³⁾		
UNV universal	O other ⁽²⁾	+GTD(#) generator transfer device ⁽³⁾		
(1) Specify system (2) Please consult factory		(3) Specify quantity		Please consult factory Not available with 347V

OTHER (OPTIONAL)	IC CONTROLS (OPTIONAL)	CUSTOM (OPTIONAL)
F fuse ⁽⁴⁾	DS# daylight sensor	C custom
FW(#) flex whip (6' std)	OS# occupancy sensor	
	DOS# daylight & occupancy sensor	
	EN# Enlighted integral ⁽⁵⁾	
	ENR# Enlighted remote ⁽⁵⁾	
	WC# wireless control dimming	
(4) Requires 120V or 277V	(5) Please consult factory Specify quantity. Requires 1.5" blank. See integrated controls guide for more details.	Please specify

SPECIFY DRIVER NAME (if needed)

SPECIFY BATTERY NAME (if needed)

● SPECIFICATIONS

Housing	Die formed cold rolled sheet steel (20 gauge)
Central Lens Housing	Extruded aluminum (0.060" nominal)
Lens	Spotless acrylic lens
Side lens	0.08" PMMA satin blend
Reflectors	Die formed cold rolled sheet steel (22 gauge)
Interior Brackets	Die formed cold rolled sheet steel (20 gauge)
Drywall Flange Kit	Extruded aluminum (0.070" nominal)

● ELECTRICAL

Lutron driver* LDE1 - EcoSystem H-Series (1%)
 LDE5 - EcoSystem 5-Series (5%)
 LTE - Hi-Lume® A-series 2Wires Forward Phase (1%)
 *Consult factory

Other drivers DALI - Digital Addressable Lighting Interface
 DMX - Digital Multiplex
 LV - line voltage - Advance Mark 10
 Xitanium SR - For wireless sensor

Emergency Integral emergency battery pack
 or emergency circuit optional.

Input Voltage 120V, 277V, 347V, UNV.

i Incorporating these components may have limitations or affect the length of the luminaire. Please contact factory for more details.

● FINISH

Highly reflective, matte powder coat white paint for high efficiency. Matte texture to diffuse glare and lamp image on the surface within the optical chamber exterior. Custom finishes are also available.

● WARRANTY

Axis Lighting will warrant defective LEDs, boards, and drivers for 5 years from date of purchase. Warranty is valid if luminaire is installed and used according to specifications. If defective, Axis will send replacement boards or drivers at no cost along with detailed replacement instructions and instructions on how to return defective components to Axis.

● APPROVALS

Certified to UL and CSA standards 
 Meets NYC requirements
 Suitable for damp locations.

● WEIGHT

Surface Mount 42 lbs / 18.9 kg

● DLC Approved Options




*Check the latest update on the DLC website for complete information. Not all versions may be DLC qualified.

PRODUCT ID	SIZE	OUTPUT	CRI	LUMENS	SHIELDING	FINISH	VOLTAGE	DRIVER	CIRCUITS
DAYFLED	2'x4'	3100 lm	80	3000 K	VL	white	universal	DP	1
DAYCLED		4500 lm		3500 K					
		5000 lm		4000 K					
		7000 lm							
		9000 lm							


● CEILING SYSTEM

MOUNTING HOLES POSITION

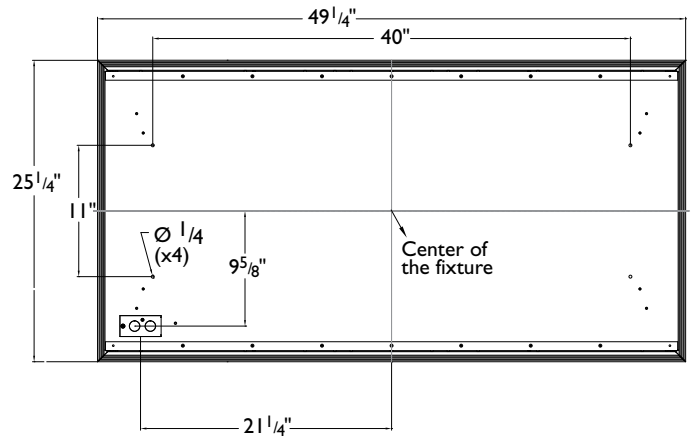

RECESSED OPTION


For more details see recessed specification sheets available at: www.axislighting.com

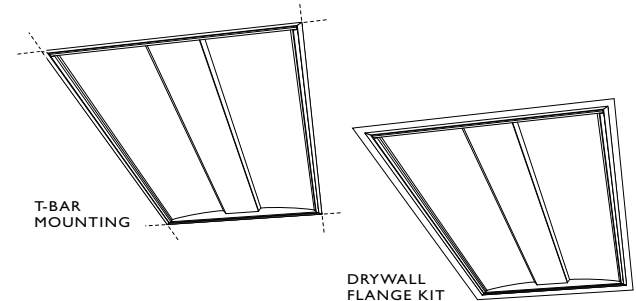

i Installation sheets for all mounting options are available at: www.axislighting.com

● STANDARD POWER FEED

Knockouts for BX cable connection are provided on the top of the luminaire.
 (BX CABLE BY OTHERS)

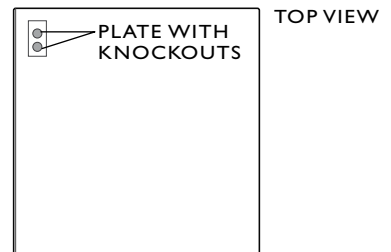

● LED SYSTEM


CRI	Minimum 80 or 90 color rendering index
CCT	Choice of 2700K, 3000K, 3500K and 4000K color temperature with a great color consistency (within 3.5-step MacAdam ellipse).
LED life	Minimum 50,000h with 70% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements.
Thermal management	Aluminium housing acting as the heat sink to maximize life.

● PHOTOMETRIC DATA

LED



PHOTOMETRIC CURVE



Luminaire Lumens: 3200 lm
Input Watts: 29.22 W
Efficacy: 112 lm/W
 IES FILE: DAYLED-24-3200-80-35-SO.ies

TESTED ACCORDING TO IES LM-79-2008

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles					Zonal Lumens
	0	22.5	45	67.5	90	
0	1251	1251	1251	1251	1251	
10	1216	1220	1222	1229	1231	58
20	1127	1135	1143	1157	1163	107
30	985	997	1024	1052	1063	140
40	809	830	874	907	918	153
50	619	643	687	712	721	142
60	428	448	477	491	494	111
70	249	260	275	279	280	69
80	100	103	109	105	103	28
90	0	0	0	0	0	

LUMINANCE DATA (cd/m²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	1614	1773	1868
55	1455	1628	1692
65	1275	1411	1449
75	1044	1149	1155
85	752	844	917

COEFFICIENTS OF UTILIZATION (%)


Ceiling	80				70				50			
	70	50	30	10	70	50	30	10	50	30	10	10
Wall	70	50	30	10	70	50	30	10	50	30	10	10
0	120	120	120	120	117	117	117	117	112	112	112	112
1	110	105	101	95	107	103	99	94	98	95	91	91
2	100	92	85	77	97	90	84	77	87	81	75	75
3	91	81	73	64	89	79	72	64	77	70	63	63
4	84	72	63	54	82	71	63	54	68	61	53	53
5	77	65	56	46	75	63	55	46	61	54	46	46
6	71	58	49	40	69	57	49	40	55	48	40	40
7	66	53	44	36	64	52	44	36	50	43	35	35
8	62	48	40	32	60	48	40	32	46	39	32	32
9	58	44	36	29	56	44	36	29	43	35	28	28
10	54	41	33	26	53	40	33	26	39	32	26	26

Based on floor reflectance of 20

LED



PHOTOMETRIC CURVE



Luminaire Lumens: 4000 lm
Input Watts: 37.4 W
Efficacy: 107 lm/W
 IES FILE: DAYLED-24-4000-80-35-SO.ies

TESTED ACCORDING TO IES LM-79-2008

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles					Zonal Lumens
	0	22.5	45	67.5	90	
0	1530	1530	1530	1530	1530	
10	1487	1492	1495	1503	1506	71
20	1379	1388	1398	1415	1423	131
30	1205	1220	1253	1287	1300	172
40	990	1015	1069	1109	1123	187
50	757	787	840	871	882	174
60	524	548	583	601	604	136
70	305	318	336	341	343	85
80	122	126	133	128	126	35
90	0	0	0	0	0	

LUMINANCE DATA (cd/m²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	1975	2168	2285
55	1780	1991	2070
65	1560	1726	1772
75	1244	1406	1413
85	9		