

Inspiring Great Spaces®

**Armstrong®**  
**FLOORING**

Migrations® BBT™



## INTRODUCING *THE STRONG SYSTEM*™

### Subfloor Preparation Products From Armstrong® Flooring

Subfloor preparation products just got stronger! Armstrong® Flooring introduces The Strong System, a collection of subfloor preparation products suitable for the rigorous demands of commercial and residential floor installations. With this launch of a series of products designed to meet the needs of the toughest subfloor preparation challenges, Armstrong Flooring becomes your one stop shop for preparation, adhesive and floor coverings.

#### The benefits of using The Strong System products...

- Extend your Armstrong Guaranteed Installation System warranty coverage and length by 10 years
- Tested for compatibility with all Armstrong Flooring resilient products
- Build your customized Strong System by selecting à la carte the preparation products that meet the needs of your installation challenges
- Eliminate the finger pointing and potentially contacting multiple suppliers in the event of an installation issue
- Armstrong Flooring is your trusted advisor and single source for all of your flooring needs

## THE STRONG LINEUP

### S-452 Seal Strong™

- A two part moisture mitigation system designed to create a moisture barrier between concrete and resilient flooring
- Suitable for use up to 100% RH (or 25 lbs CaCl)
- Only one coat required to fully seal a concrete substrate
- Covers approximately 290 sq. ft. per unit
- Shot blasting not required in some instances




### S-456 Patch Strong™

- A true feather edge finish
- High performance, flexible patching and smoothing compound with quick drying time
- Easy to apply with smooth trowel skim coat application
- No RH limit for use over concrete
- Suitable for use over S-452 Seal Strong after S-455 Prime Strong non-porous application
- No additive needed; easy to mix with water
- Zero VOC



### S-453 Level Strong™

- A self-leveling underlayment designed to work quickly
- High compressive strength of 5800 psi
- No RH limit for use over concrete
- Installs up to 1" thick without aggregate
- Ready for foot traffic in approximately 2 hours

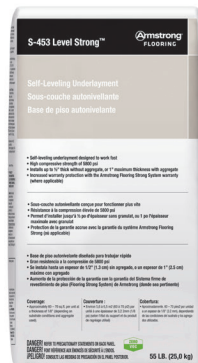

### S-454 Prime Strong™

- Acrylic primer for porous substrates
- Aids in strengthening adhesive bond
- Helps to reduce subfloor porosity and absorbency
- Approved for use with all Armstrong Flooring resilient adhesives
- Zero VOC



### S-455 Prime Strong™

- Acrylic primer for non-porous substrates
- Suitable for use over S-452 Seal Strong, existing resilient sheet and more
- Ready for installation in as few as 60 minutes
- Approved for use with all Armstrong Flooring resilient adhesives
- Zero VOC




Inspiring Great Spaces®




## INSTALL WITH CONFIDENCE BACKED BY *THE STRONG SYSTEM* WARRANTY.

### Armstrong Flooring Guaranteed Installation System

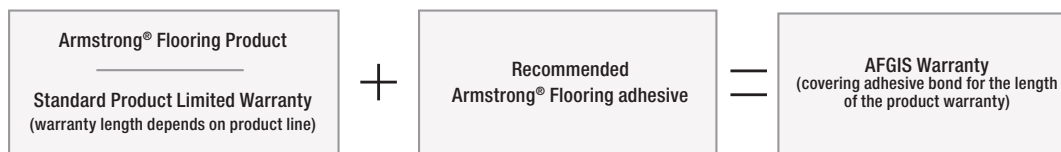

### *The Strong System Warranty*

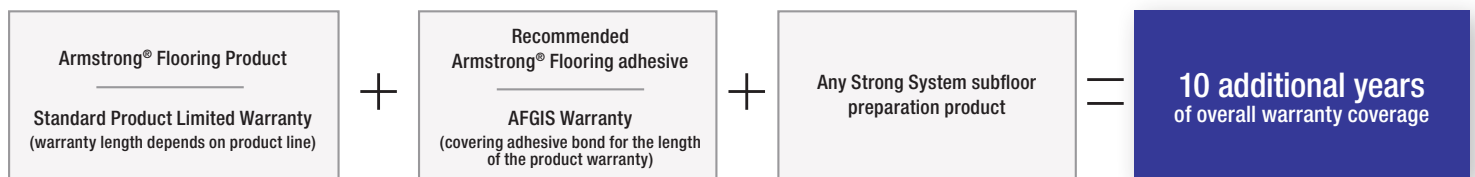

### *The Strong System* warranty provides...

- Enhance overall warranty by 10 years, using Armstrong® floor, adhesive and Strong System preparation products together
- One point of contact for any potential future issues
- A single source for:
  - subfloor preparation products
  - installation products
  - finished flooring
  - maintenance products