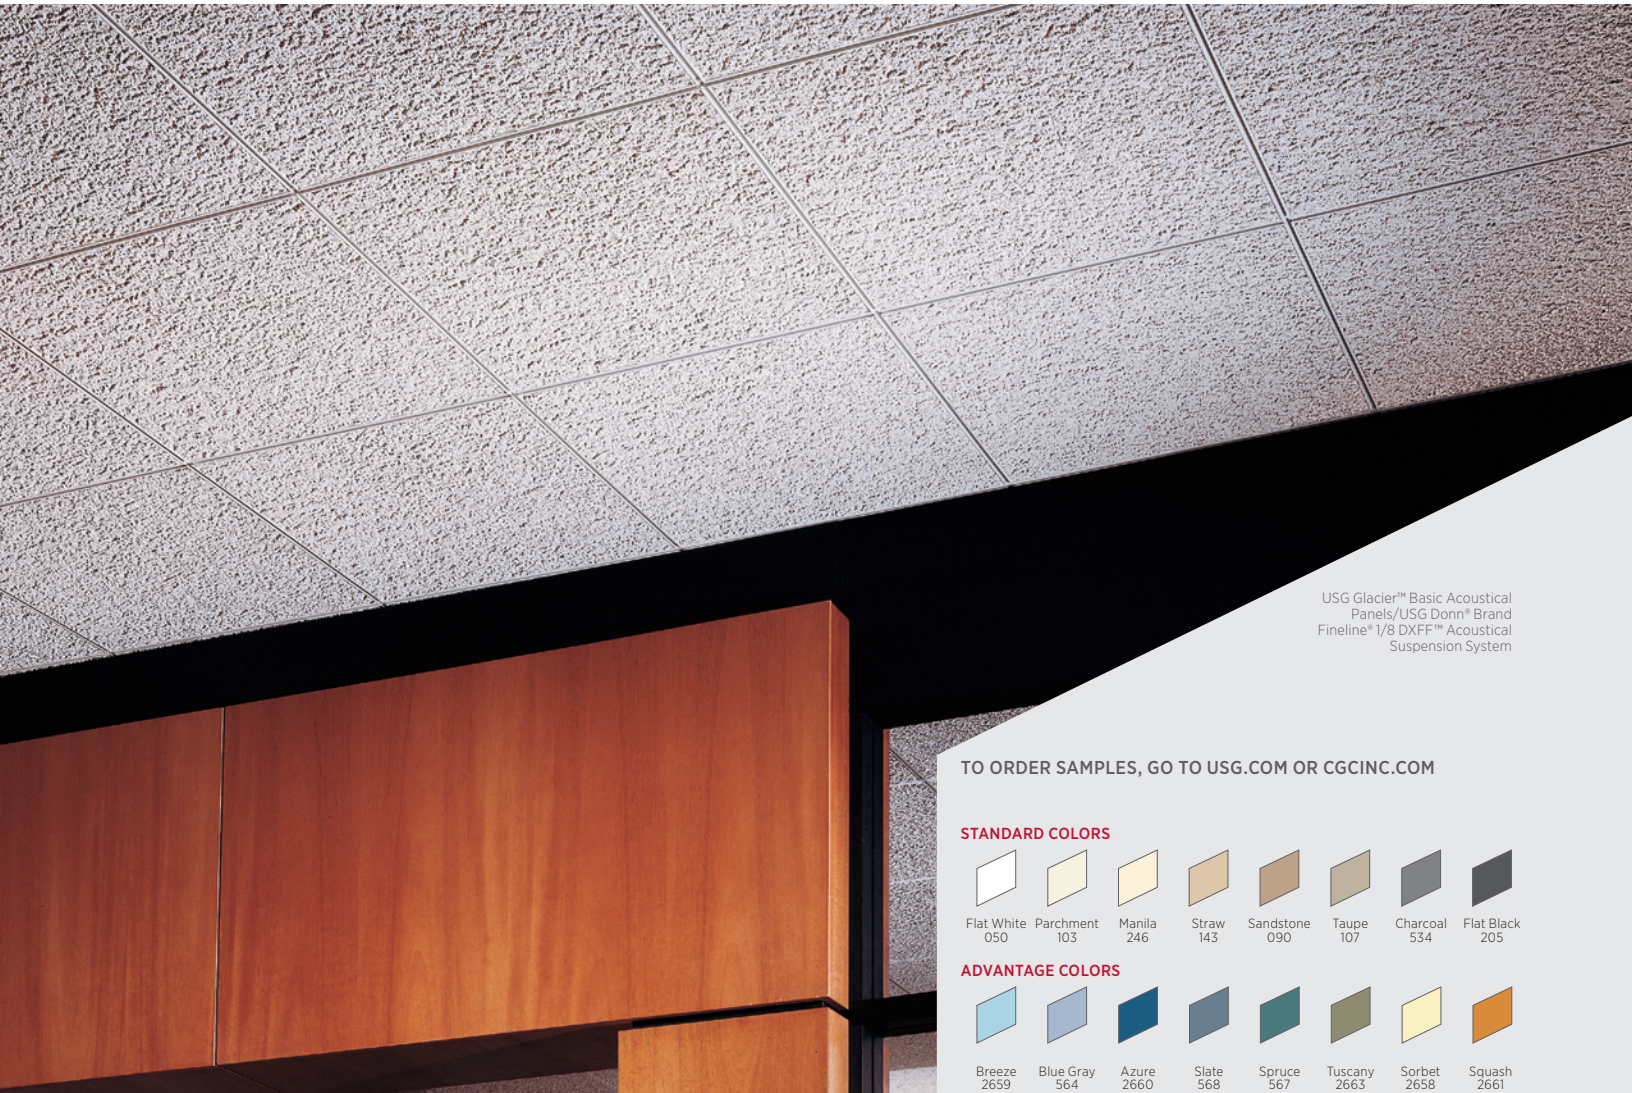


USG GLACIER™ BASIC ACOUSTICAL PANELS



USG Glacier™ Basic Acoustical
Panels/USG Donn® Brand
Fineline® 1/8 DXFF™ Acoustical
Suspension System

FEATURES AND BENEFITS

- Heavily textured cast product with durable surface that resists scrapes commonly caused by accessing the ceiling plenum.
- Zero VOC emissions exceed CA Specification 01350.
- USDA Certified Biobased Product.⁸
- 12"x12" tile with the USG Donn® Brand DX®/DXL™ Concealed Acoustical Suspension System creates a gridless appearance.
- Integral color masks nicks and scratches and enhances lifelong panel appearance.
- Optional Firecode® product designed to meet life-safety codes.
- USG Glacier™ Basic Acoustical Panels is part of the Ecoblueprint™ portfolio — meeting today's sustainability standards. For sustainability documentation go to USG.com or CGCInc.com.

APPLICATIONS

- Food courts
- Hospitality
- Libraries
- Restaurants

SUBSTRATE

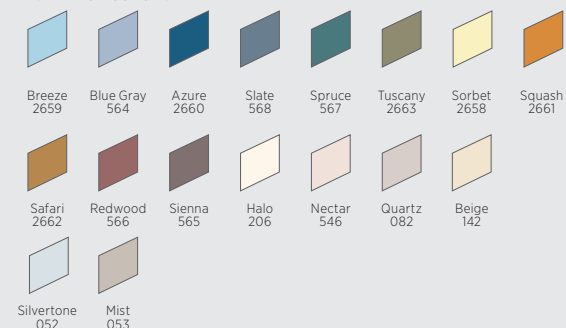
- Cast mineral fiber

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

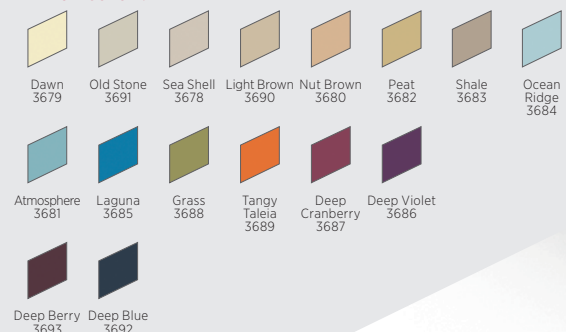
STANDARD COLORS



ADVANTAGE COLORS



PREMIUM COLORS



USG GLACIER™ BASIC ACOUSTICAL PANELS

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)













PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
UL.COM/UG
UL 2818



USG GLACIER™ BASIC
PANELS

USG GLACIER™ BASIC
TILE 5, 6, 7

UL Classified												
Edge	Panel Size	Fire Rating ²	Item No.	NRC	CAC Min.	LR ³	Color ⁴	Grid Options	VOC Emissions	Abuse Resistant	Recycled Content ¹	Panel Cost
SL 	2'x2'x3/4" Paper-Back		707	0.65	35	0.70	White Standard Advantage Premium	A	Zero		72%	\$\$\$
	2'x2'x3/4" Paper-Back		715	0.65	35	0.70	White	A	Zero		73%	\$\$\$
	2'x4'x3/4" Paper-Back	Class A	711	0.65	35	0.70	White	A	Zero		72%	\$\$\$
FL 	2'x2'x3/4" Paper-Back	Class A	708	0.65	35	0.70	White Standard Advantage Premium	B, C, D, F	Zero		72%	\$\$\$
SESK 	12'x12"x3/4"	Class A	701	0.65	25	0.70	White	E	Zero		72%	\$\$\$\$

Zero Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.







High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

Firecode®

Abuse Resistant

GRID PROFILE OPTIONS

A USG DX™/DXL™	B USG Centricitee™ DXT™	C USG Fineline® DXF™	D USG Fineline® 1/8 DXFF™	E USG DX™/DXL™ Concealed	F USG Identitee® DXI™
					

PHYSICAL DATA/
FOOTNOTES

<p>Product literature Data sheet: SC1819</p> <p>ASTM E1264 classification Type III, Form 4, Pattern F</p> <p>ASTM E84 and CAN/ULC S102 surface-burning characteristics Class A Flame spread: 25 or less Smoke developed: 50 or less</p> <p>UL Type AP, AP-1, AP-2, AP-3</p> <p>Weight 1.45 lb./sq. ft. (12"x12" tile) 1.50 lb./sq. ft. (Class A panels) 1.60 lb./sq. ft. (Firecode® panel)</p>	<p>Online tools usgdesignstudio.com or cgcdesignstudio.com</p> <p>Thermal resistance R-1.7 (Class A) R-1.3 (Firecode®)</p> <p>Maximum backloading See <i>USG 30-Year Limited System Warranty Commercial Applications</i> (SC2102).</p> <p>Maintenance Can be cleaned easily with a soft brush or vacuum.</p> <p>Texture The manufacturing process for cast ceiling panels creates natural, subtle texture variations, which is a distinguishing feature of these products. Because of potential variances between production dates, we recommend ordering and installing cast products by production lot number.</p>	<p>Notes</p> <ol style="list-style-type: none">For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.Fire-rated items; see UL design details.LR values are shown as averages.See Colors selector for more information.Texture appearance will vary based on ceiling height, installation methods and natural variation of the product.Contact USG for adhesive recommendation for 12"x12" glue-up applications.Not UL Classified for acoustics.This product has achieved both BioPreferred initiatives: Federal Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on biopreferred.gov website.
-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Notice
The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1819/rev. 8-19
© 2019 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, DONN, DX, DXF, DXFF, DXI, DXL, DXT, FINELINE, FIRECODE, GLACIER, IDENTITEE, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

USG CGC