

USG GEOMETRIX® 3-DIMENSIONAL METAL PANELS



USG Geometrix® Flat Panels
and 3" Wedge Panels/USG Donn®
Brand Centricitee™ DXT™
Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

PAINTED METALS



Flat White
050



Silver Satin
002

FEATURES AND BENEFITS

- Multiple profiles and depths lend new dimension to ceiling design.
- Panel depths of 1", 2" and 3" allow a spectrum of possibilities, from subtle textures to bold rhythms.
- 2'x2' lay-in panels are compatible with 9/16" and 15/16" USG Donn® Brand suspension systems.
- Solid or perforated panels.
- Available in Flat White, Silver Satin and custom colors for design versatility.

APPLICATIONS

- All commercial applications

USG GEOMETRIX® 3-DIMENSIONAL METAL PANELS

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

TECHNICAL SERVICES
800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com



PRODUCT INFORMATION

ACOUSTICS³

PANELS


Configurations

Depths

EDGE DETAILS

ASSEMBLY

Materials	Size and Weight	Finishes	
Panels: Aluminum	Panels 2'x2' Panel weight (for 3" deep flat panel): 0.75 lb./sq. ft.	Panels are available in smooth metal or in a choice of five perforated patterns (C375, D250, D375, C062 and C062A). A black Acoustibond™ backer is included on all perforated panels unless otherwise specified. Acoustibond backer is also available in white.	
Description	Optional Acoustical Material	Sound Rating - NRC	
Perforated panel	Acoustibond™ backer	0.60	
Perforated panel	2", 0.75 lb. fiberglass in polybag (by others)	0.85	
Flat ^{1,2}	Wedge ¹	Outside Wedge Corner	Inside Wedge Corner
USG Geometrix® Panels with 15/16\"/>	USG Geometrix® Panels with 9/16\"/>	USG Geometrix® Panels with 9/16\"/>	USG Geometrix® Panels with 9/16\"/>

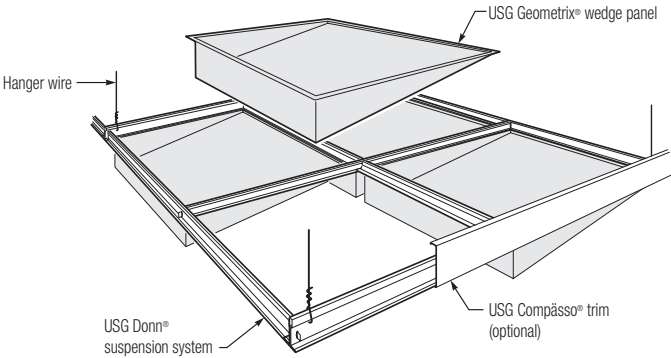

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

Product literature
System brochure: IC437
Data sheet: IC424

Limitation
Some commercially acceptable color variation may occur between lots and between different size products of the same color. For more information about metal ceiling finishes, refer to Metal Ceilings Technical Guidelines published by the Ceilings & Interior Systems Construction Association.

Recycled content
USG Geometrix® aluminum panels:
≤ 90% recycled content.

ASTM E84 surface-burning characteristics (with Acoustibond™ backer)

Class A
Flame spread: 25 or less
Smoke developed: 50 or less

ASTM E84 surface-burning characteristics (with light diffusing backer)

Class A
Flame spread: 15 or less
Smoke developed: 30 or less

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Notes

- Available pre-engineered utility circles accommodate lighting and utilities.
- Also available with 5/16" depth.
- Refer to IC425 for additional NRC information based on perforation pattern.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC424/rev. 11-16
© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, ACOUSTIBOND, CENTRICITEE, COMPÁSSO, DONN, DX, DXF, DXFF, DXL, DXT, FINELINE, GEOMETRIX, IT'S YOUR WORLD, BUILD IT, the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

