

Reach a Higher Plane



Metal Ceiling Panels

Celebration™ and Panz™

Hospitality

Entertainment & Gaming

Offices and Lobbies

Transportation Hubs

Healthcare

CELEBRATION™ and PANZ™ metal panels impart a cool, sophisticated aesthetic to enhance the ambience of your space without compromising the need for ceiling access. Choose from a variety of finishes, colors and texture options to create a look that's simple and serene or striking and bold.



Set the mood



Cool and Contemporary



User's Guide

CELEBRATION panels snap up into the reveal of the USG DONN® brand FINELINE® suspension system, concealing the grid for a clean, monolithic appearance while allowing full access to the plenum above.

PANZ panels lay into DONN® brand CENTRICITEE™, DX®/DXL™ and FINELINE suspension systems to create a sleek, modern style with easy, traditional ceiling access.

	Pages	
Understand Your System	3	CELEBRATION Overview CELEBRATION Components and Applications PANZ Overview PANZ Components and Applications
Specify Your System	23	Design Tools Finishes Perforations and Embossing Application Guide Specifications
For More Information		Technical Service 800 USG.4YOU Web Site usg.com

System Overview

Panels

CELEBRATION panels – Snap-up, suspension-hiding panels feature snap-up installation and provide easy downward access, making them great for shallow-plenum areas. Panels are available in a range of finishes, painted colors and perforation patterns.

PANZ panels – Lay in just like traditional acoustical panels. Available in many finishes, painted colors and perforation patterns as well as DIAMONDFLEX™ expanded metal.

Sizes

CELEBRATION and PANZ panels are available in traditional square and rectangular sizes as well as new large-format plank sizes. Module sizes include:

1' x 4'	2' x 2'	30" x 30"
1' x 5'	2' x 4'	30" x 60"
20" x 60"	2' x 6'	4' x 4'
	2' x 8'	

Visit usg.planks.pivotinteractive.com for an interactive selector with suspension system configurations and available perforation and embossed patterns.

Suspension Systems

CELEBRATION panels snap up into the reveal of the FINELINE DXF suspension system. Panels may be field-cut at walls and columns but otherwise should be used in full modules.

Available with the same edge details as USG acoustical ceiling panels, PANZ panels install into narrow-profile and standard suspension systems. Panels feature a unique trim detail that ensures a clean reveal edge on field-cut panels.

Perimeter Details

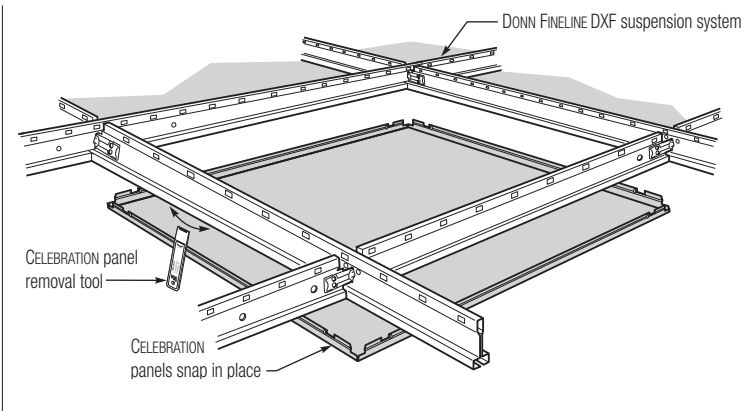
Optional COMPASSO™ trim may be used with CELEBRATION and PANZ ceilings for a finished appearance at exposed edges. See brochure IC400 in the USG Specialty Ceilings Binder for more information.

Acoustical Performance

Perforated CELEBRATION and PANZ panels ACOUSTIBOND sound backer achieve .65 NRC when installed in an enclosed plenum (18" depth min.). Available fiberglass backing provides even greater acoustical performance.

Celebration Panels

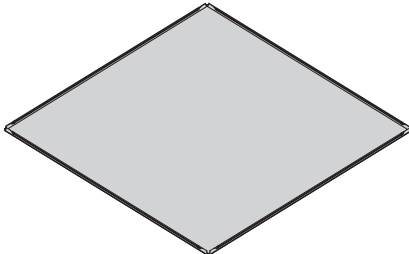
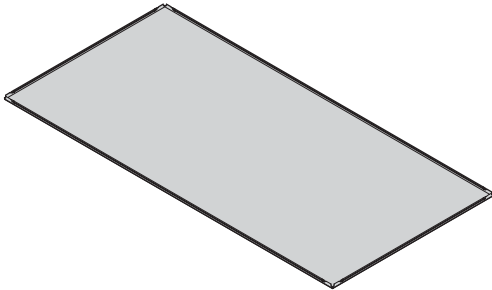



Snap up to conceal the suspension system

Suspension-Hiding	CELEBRATION panels snap up into the 1/4"-reveal FINELINE DXF suspension system, achieving the clean, monolithic aesthetic required in the design of contemporary spaces.		
Typical Module Sizes	1' x 4' 1' x 5' 20" x 60"	2' x 2' 2' x 4' 2' x 6' 2' x 8'	30" x 30" 30" x 60" 4' x 4'
	Additional panel sizes available on request.		
Materials	Panels: Aluminum FINELINE DXF suspension system: Cold-rolled steel COMPASSO edge trim: Cold-rolled steel		
Finishes¹	3 premium metals; 4 anodized metals; Standard and Advantage colors, plus metallic and custom paint colors; 3 wood-tone finishes.		
Textures	Available in solid metal or 24 perforation patterns and four embossed patterns. Black ACOUSTIBOND sound backer included standard with perforated panels unless specified; backer also available in white.		
Plenum Depth	Because panels are installed from below, the clearance for installation and removal of panels is minimal. Additional plenum clearance of up to 9" is required for air-boot and lighting installations, depending on the unit selected. Acoustical performance shown on page 5 for perforated panels with ACOUSTIBOND sound backer requires an enclosed plenum with minimum 18" depth.		
Exterior Applications	CELEBRATION systems up to 30" x 30" have been windload tested to 120 mph; systems up to 30" wide and 78" long have been windload tested to 110 mph. Requires proper bracing and exterior framing.		
Assembly			

Note
1. See the Metal Finishes selector in the USG Specialty Ceilings Binder or Ceiling Systems Desktop Reference (SC2000) for more information.

Celebration Panels

Components

Panel Options	Shape	Square Sizes: 2'x 2', 30"x 30" and 4'x 4'	Plank Sizes: 1'x 4', 1'x 5', 20"x 60", 2'x 4', 2'x 6', 2'x 8' and 30" x 60"	
				
Finish		CELEBRATION panels are offered in up to six distinctive finishes: premium metal, anodized metal, brushed metal, polished metal, painted metal, and wood tones. See page 16 for details and availability by panel size.		
Texture		Panels are available in solid metal or a choice of 24 perforated patterns. 2'x2' panels may also be embossed, with or without perforation. See pages 17-22 for details.		
		Solid panel 	Perforated panel 	Embossed panel 

Components



Acoustical Performance

Perforated CELEBRATION panels come standard with a black, factory-applied ACOUSTIBOND backer for enhanced sound performance. The ACOUSTIBOND backer is included on all perforated panels unless otherwise specified. This backer is also available in white. For even greater acoustical performance, fiberglass backing is available.

Panel	Optional Acoustical Material	Sound Rating – NRC ²	
		Perforation A062	Perforation A116
Perforated panel	ACOUSTIBOND backer	.65	.70
Perforated panel	1-1/2", 6 lb. density fiberglass	.90	.95
Perforated panel	2", .75 lb. fiberglass in poly bag	.85	.90

Note

2. Enclosed plenum with minimum 18" depth.

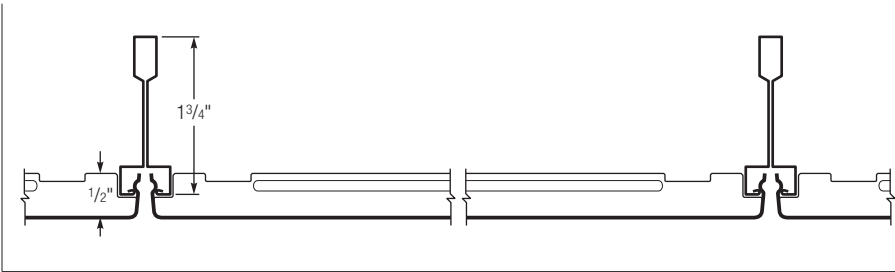
Standard (with black ACOUSTIBOND backer)	Optional (without ACOUSTIBOND backer)
	

Hidden Suspension System

CELEBRATION panels snap up into the reveal of the FINELINE DXF suspension system, concealing the grid for a clean, monolithic appearance, while allowing full access to the plenum above.

Panels may be field cut at walls and columns but otherwise should be used in full modules.

Edge Detail

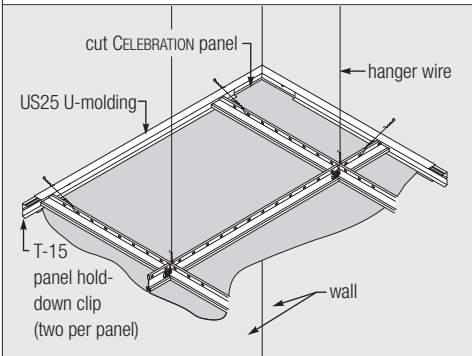


Celebration Panels


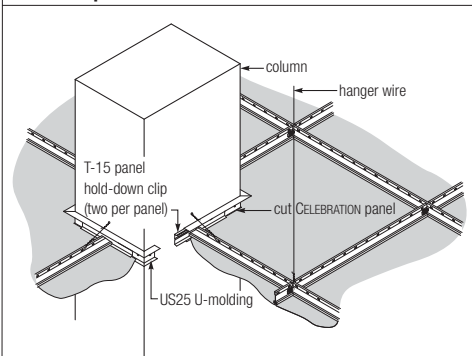
Applications

Perimeter Details


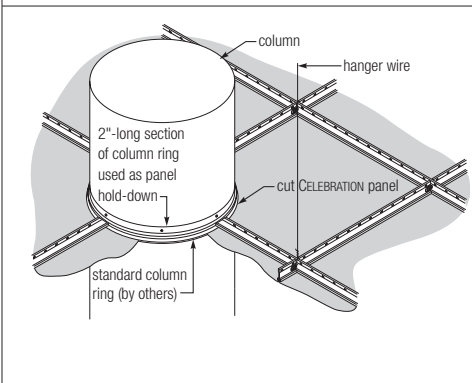
Wall DXF US25



Column-Square







Column-Round



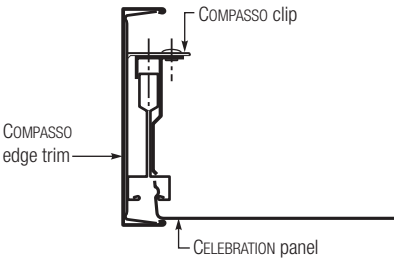
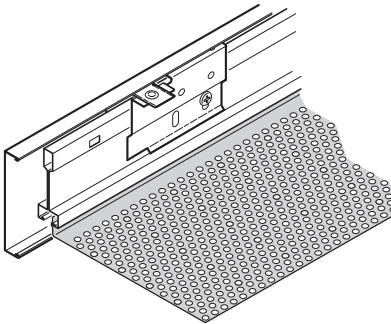
Applications

Trim Details

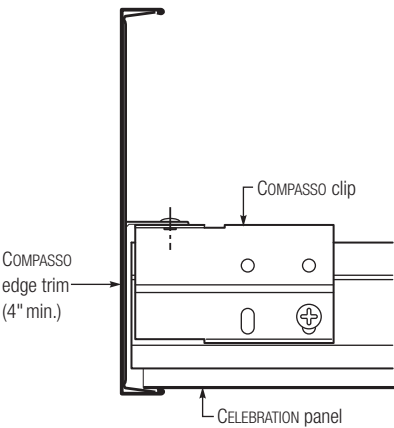
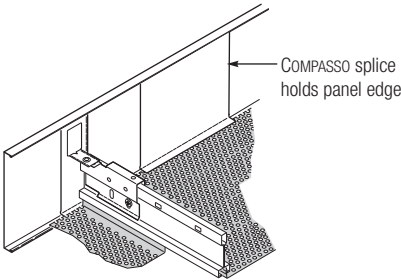
Optional COMPASSO edge trim in 2-1/4", 4", 6", 8", 10" and 12" heights may be added for a finished appearance at exposed edges.

2-1/4"	4"	6"	8"	10"	12"
					

Parallel (On Module)



Perpendicular (Off Module) 2-1/4" trim may not be used in off-module applications

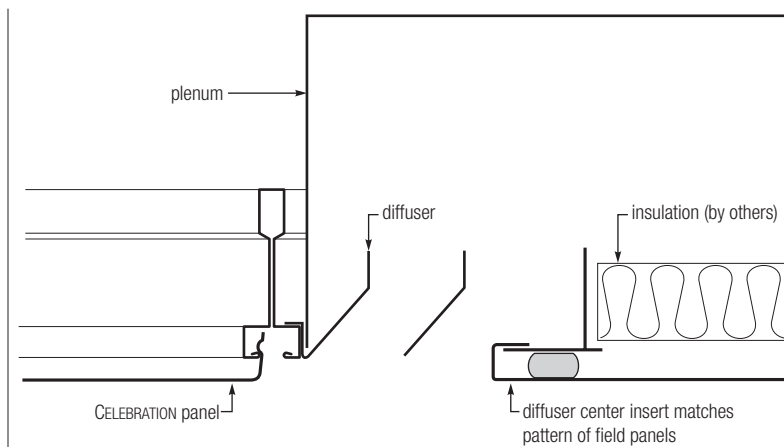
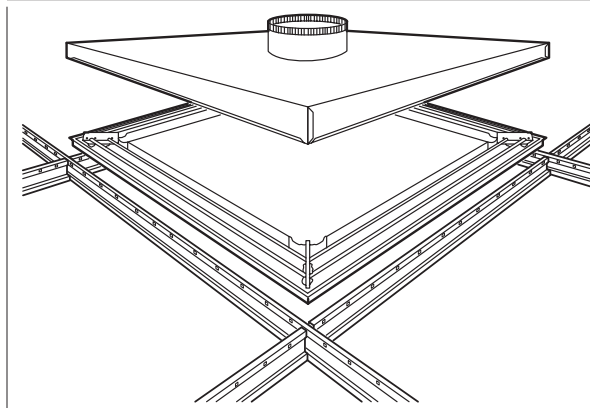


Celebration Panels

Applications

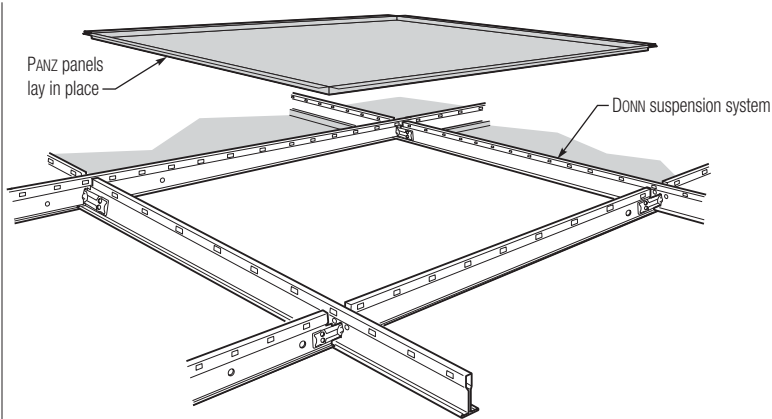
DONN® CELEBRATION™ Diffuser

Available in 1-, 2-, 3- and 4-slot configurations, with four-directional throw. Requires plenum clearance of up to 9". Diffuser center insert matches perforation and/or embossing pattern of field panels. For air-diffuser performance data, see USG technical data sheet AC272.



Panz Panels


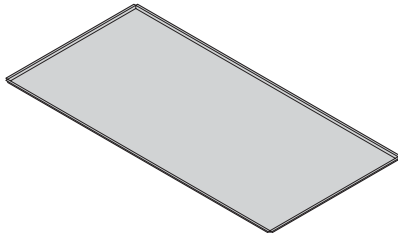



Lay in for traditional plenum access

Lay-In Panels	PANZ panels combine the easy plenum access of traditional acoustical panels with the sleek, contemporary style of metal.
Materials	Panels: Aluminum DONN suspension systems: Cold-rolled steel COMPASSO edge trim: Cold-rolled steel
Finishes ³	3 premium metals; 4 anodized metals; 6 DIAMONDFLEX [®] expanded metals; Brushed Aluminum; Standard and Advantage colors, plus metallic and custom paint colors; 3 wood-tone finishes.
Textures	Available in solid metal, 24 perforation patterns and four embossed patterns. Black ACOUSTIBOND backer included standard with perforated panels unless specified; backer also available in white. ⁴
Assembly	

Notes
3. See the Metal Finishes selector in the USG Specialty Ceilings Binder or Ceiling Systems Desktop Reference (SC2000) for more information.
4. ACOUSTIBOND backer not standard with DIAMONDFLEX panels.

Panz Panels

Components



Panel Options	Shape	Square Sizes: 2'x 2', 30"x 30" and 4'x 4' 	Plank Sizes: 1'x 4', 1'x 5', 20"x 60", 2'x 4', 2'x 6', 2'x 8' and 30" x 60" 	
	Finish	PANZ panels are offered in up to seven distinctive finishes: premium metal, anodized metal, brushed metal, polished metal, painted metal, DIAMONDFLEX expanded metal, and wood tones. See page 16 for details and availability by panel size.		
Texture		Panels are available in solid metal or a choice of perforated patterns. 2'x 2' panels may also be embossed, with or without perforation. See pages 17-21 for details.		
		Solid panel 	Perforated panel 	Embossed panel 

Components

Acoustical Performance

Perforated PANZ panels come standard with a black, factory-applied ACOUSTIBOND backer for enhanced sound performance. The ACOUSTIBOND backer is included on all perforated panels unless otherwise specified. This backer is also available in white. For even greater acoustical performance, fiberglass backing is available.⁵

Panel	Optional Acoustical Material	Sound Rating – NRC ⁶	
		Perforation A062	Perforation A116
Perforated panel	ACOUSTIBOND backer	.65	.70
Perforated panel	1-1/2", 6 lb. density fiberglass	.90	.95
Perforated panel	2", .75 lb. fiberglass in poly bag	.85	.90







Standard (with black ACOUSTIBOND backer ⁷)	Optional (without ACOUSTIBOND backer)
	

Notes

5. ACOUSTIBOND backer not standard with DIAMONDFLEX panels.
6. Enclosed plenum with minimum 18" depth.
7. White ACOUSTIBOND backer available.

Suspension Systems



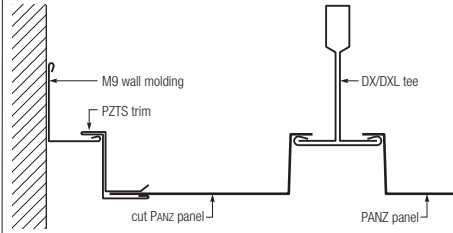
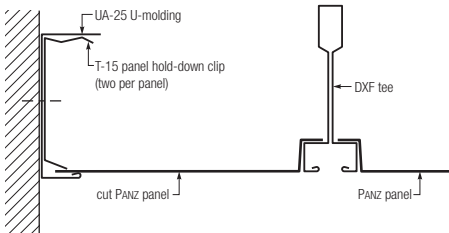
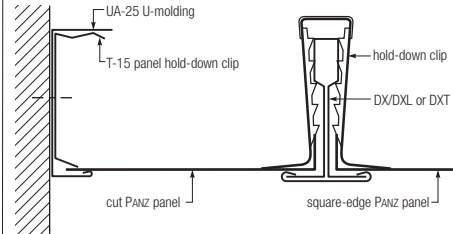
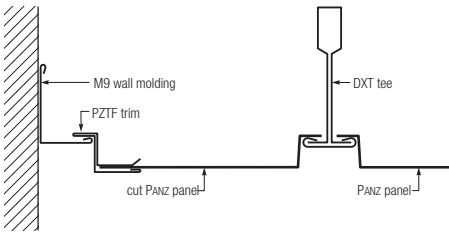
Available with the same edge details as USG acoustical ceiling panels, PANZ panels install into narrow-profile and standard DOWN suspension details.

Square Edge with 15/16" DX®/DXL™ Suspension	Square Edge with 9/16" CENTRICITEE™ (DXT) Suspension	Shadowline Edge with 15/16" DX/DXL Suspension	Fineline Edge with 9/16" CENTRICITEE (DXT) Suspension
			
Fineline Edge with 9/16" FINELINE® (DXF) Suspension	Fineline Edge with 9/16" FINELINE® 1/8 (DXFF) Suspension		
			

Panz Panels

Applications

Perimeter Details

Non-Wall or Floating Condition		Wall or Column Condition	
DX or DXT Profile	DXF or DXFF Profile	DX or DXT Profile	DXF or DXFF Profile
			
Wall/Column DX/DXL M9		Wall/Column DXF UA25	
			
Wall/Column DX/DXL-DXT U25 clip		Wall/Column DXT M9	
			

Applications

Trim Details Optional COMPASSO edge trim in 2-1/4", 4", 6", 8", 10" and 12" heights may be added for a finished appearance at exposed edges.						
Edge Trim	2-1/4"	4"	6"	8"	10"	12"
Parallel (On Module)						
Perpendicular (Off Module)						

Design Tools

Online Selector for Plank-Size Panels

CELEBRATION and PANZ panels are available in a range of new plank sizes, with many perforation choices. To streamline your design process, visit our online estimator at usg.planks.pivotinteractive.com. Use this interactive resource to select plank-size panels and available suspension systems, determine suspension system layout and perforation options, and generate a specification.

Select Panel Size and Suspension System

USG

PRODUCTS
RESOURCES
ABOUT USG
MY LIBRARY
USG RACING

news & events
careers
contact USG

SEARCH


GO


ADVANCED SEARCH >

Panz™ & Celebration™ Plank Ceiling Panels

Develop a complete Panz™ or Celebration™ outline specification.


Select A Panel Type


☐ Panz Lay-in, Exposed T bar


☐ Celebration Snap-in, downward accessible grid hiding

Select A Panel Size

☐ 12" x 48"
☐ 12" x 60"
☐ 20" x 60"
☐ 24" x 48"
☐ 24" x 72"
☐ 24" x 96"
☐ 30" x 60"


24" x 48" PANEL

Select An Edge

SL Edge with 15/16" DX	FL Edge with Centricitee DXT	FL Edge with Fineline DXF	FL Edge with Fineline DXFF
 ☐	 ☐	 ☐	 ☐
Celebration Edge with Fineline DXF			
 ☐			

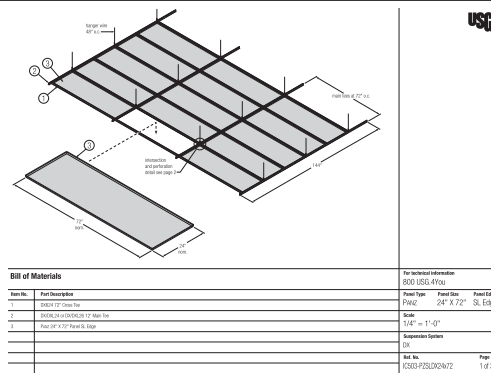
Next

© 2005 USG Corporation - All rights reserved | [site map](#) | [global sites](#) | [legal info](#) | [privacy](#) | [PO terms & conditions](#)

Online Selector for Plank-Size Panels

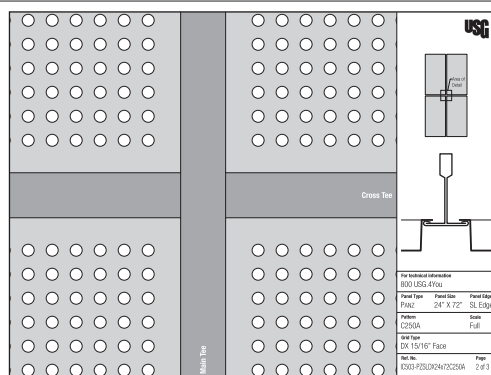
Determine Suspension System Layout

Plank-size panels may require nonstandard main-tee lengths and cross-tee and hanger wire positions. The online selector makes it easy to create a layout that works in your space and incorporate a sophisticated new look into to your design.



Select Perforation Options

The online selector illustrates the perforation patterns available for each plank-size panel and shows how each pattern would look in the available suspension systems.



Generate Specification

After making your selections, the estimator will generate a specification form that you can print or save in .pdf format.

PLANS Panel Type		Panel Panel - SL Edge			
Suspension System		DK 15x18" Face			
Panel Size (nominal)		☐ 12" x 48" ☐ 12" x 60" ☐ 20" x 48" ☐ 24" x 48" ☒ 54" x 72" ☐ 54" x 96" ☐ 30" x 60"			
Perforation		☒ Perforated ☐ Smooth (non-perforated)			
Perforation Pattern		☐ A065A ☐ A16 (RA for 248) ☐ A188 ☐ A250 (RA for 248) ☐ C062 ☐ C116 ☐ C188 ☒ C205A ☐ C375 ☐ Other (Send RTQ)			
Acoustical Backer (optional)		☐ Yes ☐ No		Color ☐ Black ☐ White	
Painted Finish (optional)		☐ Painted Colors ☐ Metallic Copper ☐ Silver Satin ☐ Flat White ☐ Metallic Gold ☐ "Custom"			
Painted Wood		☐ Oak ☐ Maple ☐ Cherry			

Panel Manufacturer Name and Number

1. For use on other than USG products, such as, but not limited to, gypsum board, metal ceiling tiles, etc. use the proper Gypsum Association, Metal Ceiling Tile Association, or other appropriate standards. The samples should be reviewed by USG, Service or Technical, 1000 Cedar Road, Dayton, OH 45424, before ordering.

Factory Detail (optional)	☐ No ☐ Yes Factory cabinet size (inches) _____ Factory cabinet shape _____ Is cabinet centered? ☐ Yes ☐ No If "No" specify dimension (inches) X _____ Y _____		For further information 800.455.4574	Form Type Print	Form Size SL Edge
Accessories Price Options Selector See Type DK 15x18" Face See Type 4259-FDS2K	Rev. 1/13		Rev. 1/13		

Celebration and Panz Panels

Finishes

Availability

CELEBRATION and PANZ Panels

	Panel Size ⁸									
	2' x 2'	30" x 30"	4' x 4'	1' x 4'	1' x 5'	20" x 60"	2' x 4'	2' x 6'	2' x 8'	30" x 60"
										
Premium Metals	•									
Anodized Metals	•									
Painted Metals										
Flat White	•	•	•	•	•	•	•	•	•	•
Silver Satin	•	•	•	•	•	•	•	•	•	•
Metallic Copper	•			•	•	•	•	•		
Metallic Gold	•			•	•	•	•	•		
Metallic Oyster	•			•	•	•	•	•		
Custom Color	•	•	•	•	•	•	•	•	•	•
DIAMONDFLEX Expanded Metals⁹	•									
Wood Tones										
Cherry	•			•	•	•	•	•		
Maple	•			•	•	•	•	•		
Oak	•			•	•	•	•	•		

Notes

8. Custom sizes available. Contact your local USG representative for details.

9. PANZ panels only; available with FL and SL edge.

Perforations and Embossing

Availability

CELEBRATION and PANZ Panels

Perforation Patterns	Panel Size									
	2' x 2'	30"x 30"	4' x 4'	1' x 4'	1' x 5'	20"x 60"	2' x 4'	2' x 6'	2' x 8'	30"x 60"
										
A062	•	•	•	•	•	•	•	•	•	•
A116	•	•	•	•	•	•	•	•	•	•
A188	•	•	•	•	•	•	•	•	•	•
A250	•	•	•	•	•	•	•	•	•	•
A500	•									
B079	•									
B125	•									
B188A	•									
B197	•									
B250	•									
B250H (formerly H250)	•									
B312	•									
B500	•									
C062	•	•	•	•	•	•	•	•	•	•
C062A	•	•	•							
C116	•	•	•	•	•	•	•	•	•	•
C188	•	•	•	•	•	•	•	•	•	•
C250A	•	•	•	•	•	•	•	•	•	•
C375	•	•	•	•	•	•	•	•	•	•
C500	•	•	•							
D250	•	•	•							
D375	•	•	•							
D500	•	•	•							
D500D	•	•	•							
Embossing Patterns										
EC25D	•									
EC25U	•									
EM25D	•									
EM25U	•									

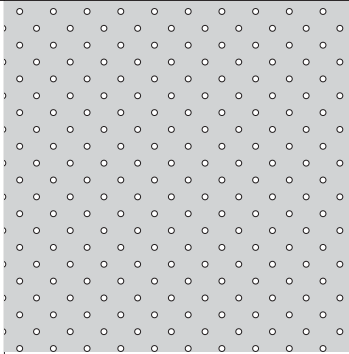
Celebration and Panz Panels

Perforations

- Perforation patterns shown at 50% of actual size.
- When ordering, please refer to the pattern number for perforation samples (for example, "A062").
- See page 16 for availability.

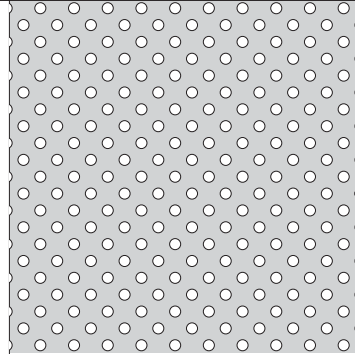
Round Holes at 45° Alignment

Pattern A062



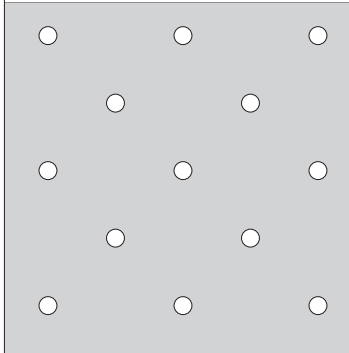
Round—1/16" perforations
.25" o.c., 5% open area

Pattern A116



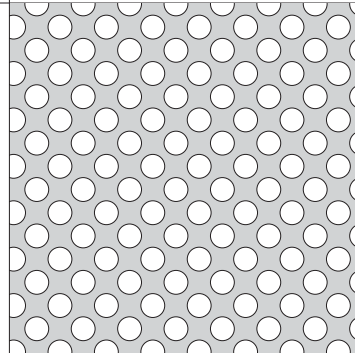
Round—15/128" perforations
.354" o.c., 17% open area

Pattern A188



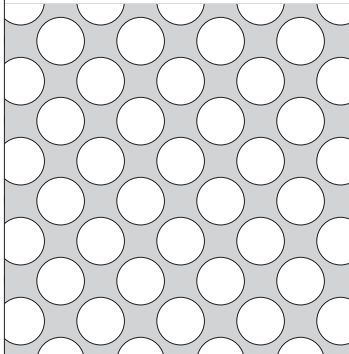
Round—3/16" perforations
1" o.c., 3% open area

Pattern A250



Round—1/4" perforations
.5" o.c., 39% open area

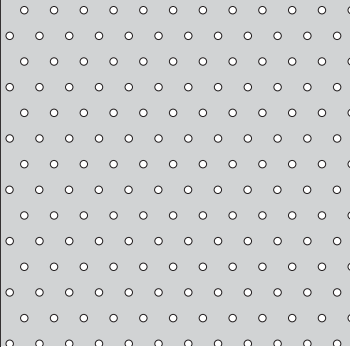
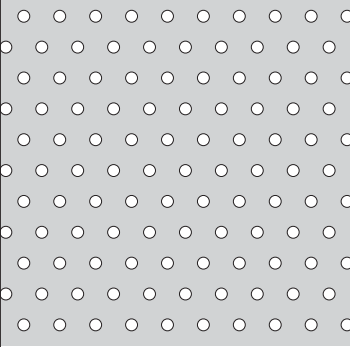
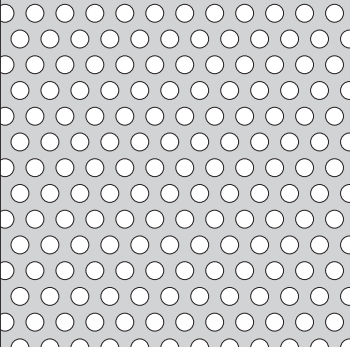
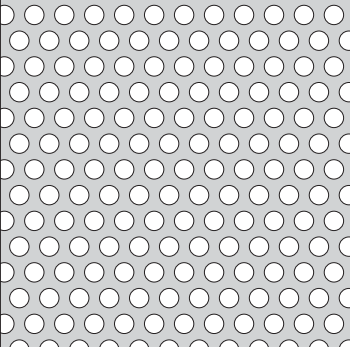
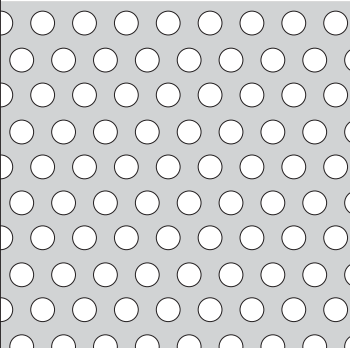
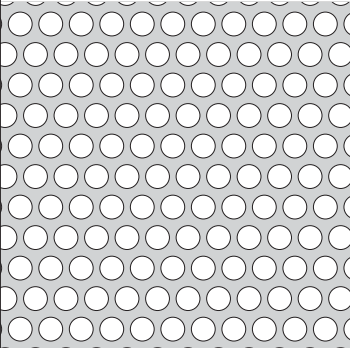
Pattern No. A500



Round—1/2" perforations
.848" o.c., 55% open area
Not to be used with the One-Directional CURVATURA system

Perforations

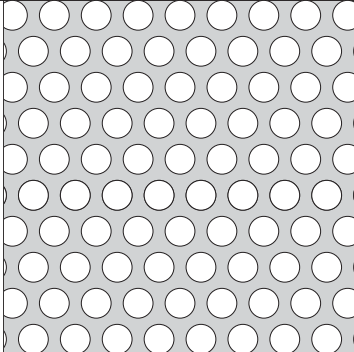
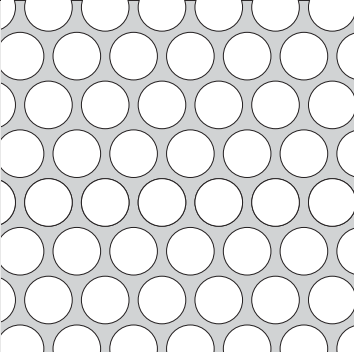
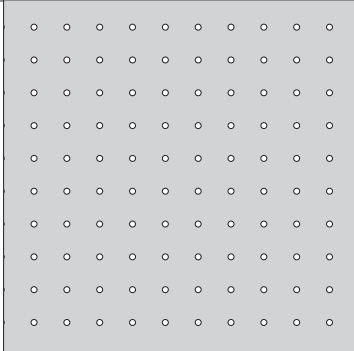
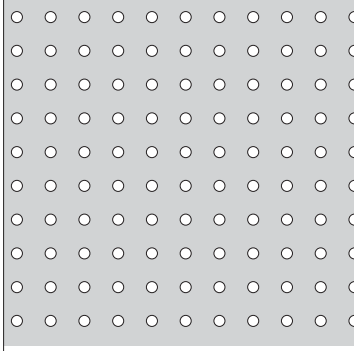
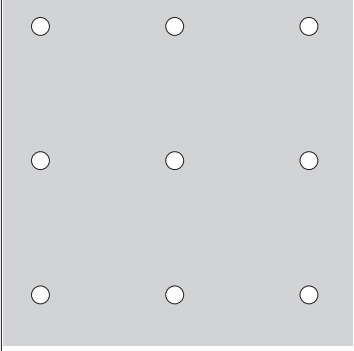
- Perforation patterns shown at 50% of actual size.
- When ordering, please refer to the pattern number for perforation samples (for example, "A062").
- See page 16 for availability.

Round Holes at 60° Alignment	Pattern B079	Pattern B125
		
	Round—5/64" perforations .312" o.c., 6% open area	Round—1/8" perforations .375" o.c., 10% open area
	Pattern No. B188A	Pattern No. B197
		
	Round—3/16" perforations .312" o.c., 33% open area	Round—13/64" perforations .316" o.c., 35% open area
	Pattern B250	Pattern No. B250H (formerly H250)
		
	Round—1/4" perforations .437" o.c., 30% open area	Round—1/4" perforations .32" o.c., 58% open area

Celebration and Panz Panels

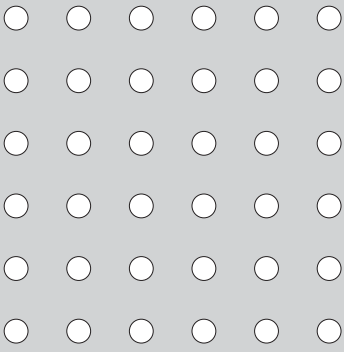
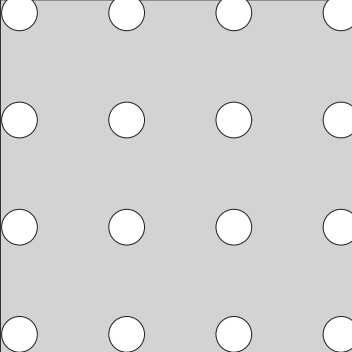
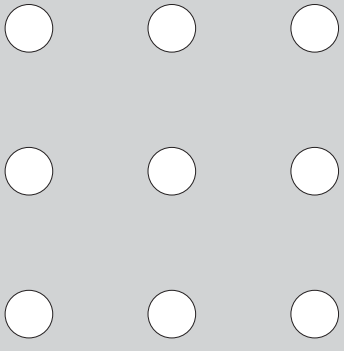
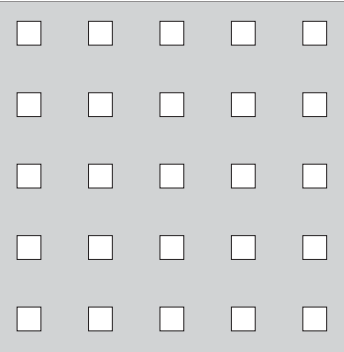
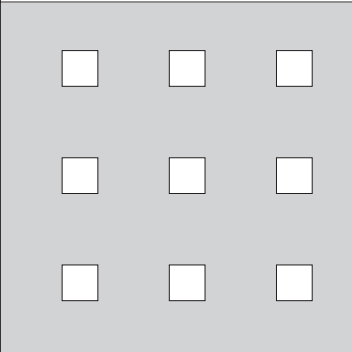
Perforations

- Perforation patterns shown at 50% of actual size.
- When ordering, please refer to the pattern number for perforation samples (for example, "A062").
- See page 16 for availability.

Round Holes at 60° Alignment	Pattern No. B312  Round – 5/16" perforations .437" o.c., 46% open area	Pattern B500  Round – 1/2" perforations .600" o.c., 63% open area Not to be used with the One-Directional CURVATURA System
	Pattern No. C062  Round – 1/16" perforations .351" o.c., 2% open area	Pattern No. C062A  Round – 1/16" perforations .175" o.c., 10% open area
Round Holes at 90° Alignment	Pattern No. C116  Round – 15/128" perforations .344" o.c., 8% open area	Pattern No. C188  Round – 3/16" perforations 1.414" o.c., 1% open area

Perforations

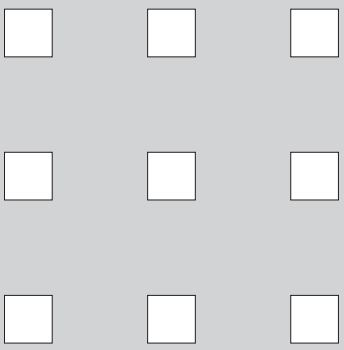
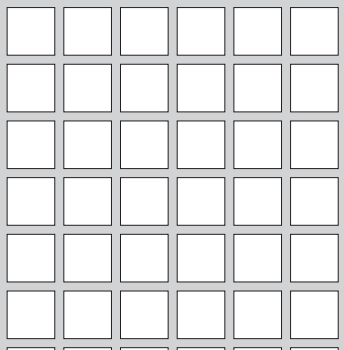
- Perforation patterns shown at 50% of actual size.
- When ordering, please refer to the pattern number for perforation samples (for example, "A062").
- See page 16 for availability.

Round Holes at 90° Alignment	Pattern No. C250A  Round – 1/4" perforations .65" o.c., 12% open area	Pattern C375  Round – 3/8" perforations 1.125" o.c., 9% open area
	Pattern No. C500  Round – 1/2" perforations 1.5" o.c., 9% open area	
	Pattern No. D250  Square – 1/4" perforations .75" o.c., 11% open area	Pattern No. D375  Square – 3/8" perforations 1.125" o.c., 11% open area
Square Holes at 90° Alignment		

Celebration and Panz Panels

Perforations

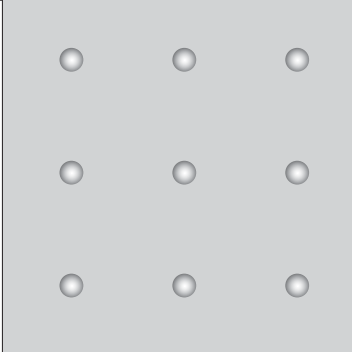
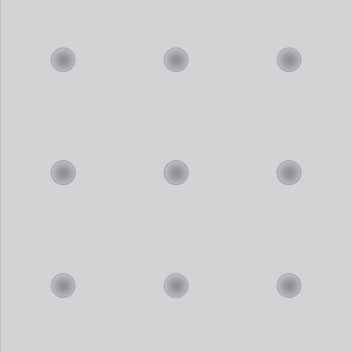
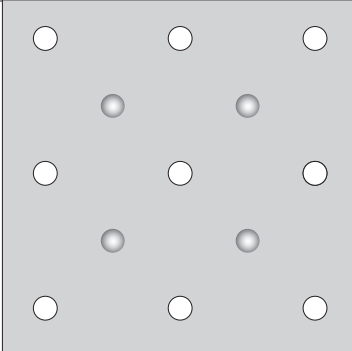
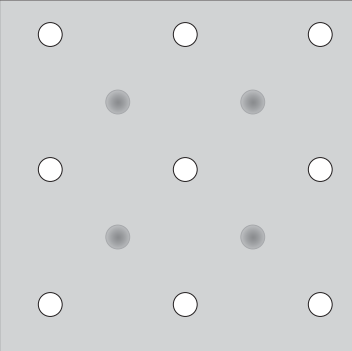
- Perforation patterns shown at 50% of actual size.
- When ordering, please refer to the pattern number for perforation samples (for example, "A062").
- See page 16 for availability.

	Pattern D500	Pattern D500D
Square Holes at 90° Alignment		
	Square—1/2" perforations 1.5" o.c., 17% open area	Square—1/2" perforations .595" o.c., 70% open area Meets NFPA for sprinklers above.

Embossing

(Available for 2' x 2' CELEBRATION and PANZ panels)

- Embossing patterns shown at 50% of actual size.
- When ordering, please refer to the pattern number (for example, "to come").
- See page 16 for availability.

Embossing Only	Pattern No. EM25D	Pattern No. EM25U
	 Round – 1/4" dia. x 1/16" embossing 1.18" o.c., no perforation Face side 	 Round – 1/4" dia. x 1/16" embossing 1.18" o.c., no perforation Face side 
Embossing and Perforations	Pattern No. EC25D	Pattern No. EC25U
	 Round – 1/4" perforations 1.41" o.c., 2% open area Black Acoustibond backer standard Face side 	 Round – 1/4" perforations 1.41" o.c., 2% open area Acoustibond backer not available Face side 

Application Guide

Specifications

Metal Ceiling Panels

Part 1: General

1.1 Summary

- A.** Description of Work: Work of this Section includes, but is not limited to, the following
1. Metal ceiling panels.
 2. Metal suspension systems.
 3. Trim and accessories.

1.2 Related Work Specified Elsewhere

- A.** See Section _____ - HVAC
B. See Section _____ - Lighting
C. See Section 095100(09150)- Acoustical Ceilings

1.3 Submittals

- A.** Product Data: Submit manufacturer's specifications and installation instructions with Project conditions and materials clearly identified or detailed for each required system.

1.4 References

- A.** ASTM C635: Standard specifications for Metal Suspension Systems for Acoustical Tile and Lay-in Panel Ceilings.
B. ASTM C636: Recommended Practice for Installation of Metal Suspension System for Acoustical Tile and Lay-in Panels.
C. ASTM E119: Fire Tests of Building Construction and Materials.
D. ASTM C423: Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method.
E. ASTM E84: Fire Hazard Classification.
F. CISCA Ceiling System Handbook

1.5 Quality Assurance

- A.** Reference Standards
1. ASTM C635, Standard Specifications for Metal Suspension Systems
 2. ASTM Recommended Practice for Installation of Metal Suspension Systems.
 3. CISCA Ceiling Systems Installation Handbook
- B.** Submittals
1. Samples: Submit actual samples and technical data for suspension system main tees and cross tees for review.
 2. Shop Drawings:
 - a.** Reflected ceiling plans: Submit ceiling suspension system layout indicating dimensions, lighting fixture locations, and related mechanical components.
 - b.** Assembly Drawings: Indicate installation details, accessory attachments and installation of related lighting fixtures and related mechanical system components.
 3. Manufacturer's Data:
 - a.** System Details: Submit manufacturer's catalogue cuts or standard drawing showing details of system with project conditions clearly identified and manufacturer's recommended installation instructions

1.6 Delivery, Storage And Handling

- A.** Delivery:
1. Deliver material to site promptly without undue exposure to weather
 2. Deliver in manufacturer's unopened containers or bundles, fully identified with name, brand, type and grade
- B.** Inspection:
1. Promptly inspect delivered materials, file freight claims for damage during shipment, and order replacement materials as require. Any damaged materials shall be promptly removed from the job site
- C.** Storage:
1. Store above ground in dry, ventilated space.
 2. Protect materials from soiling, rusting and damage.
- D.** Handling:
1. Handle in such manner to insure against racking, distortion or physical damage of any kind.

Metal Ceiling Panels

1.7 Project Conditions	A. Environmental Requirements: 1. Do not install system or any parts until space is enclosed and weatherproof, wet-work is complete and dry, work above installation is complete and space temperature and humidity has been maintained as designed for occupancy.
1.8 Coordination With Other Work	A. General: 1. Coordinate with other work including mechanical and electrical work and partition systems. Installation of conduit and ductwork above suspension system shall be complete before installation of suspension system. B. Protection: 1. Follow good safety and industrial hygiene practices during handling and installing of all products and systems, with personnel to take necessary precautions and wear appropriate personal protective equipment as needed. Read Material Safety Data Sheets and related literature for important information on products before installation. Contractor to be solely responsible for all personal safety issues during and subsequent to installation; architect, specifier, owner and manufacturer will rely on contractor's performance in such regard.
Part 2: Materials	1.1 Materials A. CELEBRATION metal ceiling panels: 1. Manufactured by USG (United States Gypsum Company, USG Interiors), Chicago, IL, USA, in compliance with applicable ASTM Standards. Design to be installed with FINELINE suspension system. 2. Panel finishes shall be: (anodized metal) (painted) (premium) (brushed) (polished) (wood tones) in color/finish# Refer to page 16 for size and finish availability. Refer to page 17 for perforations and embossing. 3. Accessories: a. UA-25 molding: Channel shape, 1"x1-9/16"x1/2". b. CA5 Retrofit molding: for Ceiling track, finished to match with ceiling panel c. CA2 Retrofit Slip-on molding: For Wall angle, finished to match with ceiling panel d. T15 panel hold-down clip: for cut perimeter panels in UA-25 molding. e. CA1 Arrowhead reveal spacer: For cut perimeter panels into first reveal row. f. CA4 round reveal spacer: For cut perimeter panels adjacent to light or air diffuser, or for use with retrofit U-molding. g. MS274 shadow molding: 7/8" x 3/4" x 9/32" x 1-1/4" for seismic installation. h. Panels with cutouts: For incandescent lights, sprinklers, or speakers. i. Access tool: For Panel removal. After installation leave 10 removal tools for maintenance. B. PANZ metal lay-in ceiling panels: 1. Manufactured by USG (United States Gypsum Company, USG Interiors), Chicago, IL, USA, in compliance with applicable ASTM Standards. Installed into a compatible DONN DX/DXL, DXT/DXLT CENTRICITEE, DXF/DXLF FINELINE, or DXFF FINELINE 1/8" suspension system. 2. Panel finishes shall be: (anodized metal) (painted) (premium) (brushed) (polished) (wood tones) in color/finish# For panel edge and grid interface detail refer to page 11. Refer to page 16 for size and finish availability. Refer to page 17 for perforations and embossing. 3. Accessories: a. M9 wall molding: 15/16" x 9/16" x 12' long angle shape of prepainted steel. b. MS274 shadow molding: 7/8" x 3/4" x 9/32" x 1-1/4" for seismic installation. c. PZTSL PANZ shadowline perimeter trim: 1/4" x 5/8" x 1/2" x 12'. d. PZTFL PANZ FINELINE perimeter trim: 1/4" x 5/16" x 1/2" x 12'. e. Panels with cutouts: For incandescent light, sprinklers, or speakers with integral trim to conceal the edge of the panel cutout (specify perforation sizes and locations for each type).

Application Guide Specifications

Metal Ceiling Panels

Part 3: Execution		C. Suspension System Components: - General: DONN (DX/DXL) (DXT/DXLT CENTRICITEE) (DXF/DXLF FINELINE) (DXFF FINELINE 1/8") ASTM C635, (INTERMEDIATE) (HEAVY) Duty Classification, commercial-quality cold-rolled steel, exposed surfaces prefinished in manufacturer's standard color. For CELEBRATION panels use only DXF/DXLF FINELINE suspension system. D. Air Distribution components: - DONN® CELEBRATION air diffuser: Extruded aluminum frame with matching faceplate and color-coordinated vanes (24"x24"), (one) (two) (three) (four) slot configurations with four directional throw. Finish to coordinate with CELEBRATION panels. - Plenum: 28-gauge galvanized steel insulated with 1/2" fiberglass insulation, _____ diameter top inlet collar. - When using PANZ panels specify air diffusers only with the DXF/DXLF FINELINE suspension system.
	3.1 General	A. Standard for Ceiling Suspension System Installations: Comply with ASTM C636. B. Standard for Ceiling Suspension Systems Requiring Seismic Restraint: Comply with ASTM E 580. C. Cisca Ceilings Systems Handbook.
	3.2 Inspection	A. Examine areas to receive ceiling panels for conditions that will adversely affect installation. Provide written report of discrepancies. B. Do not start work until unsatisfactory conditions are corrected. C. Work to be concealed: Verify work above ceiling is complete and installed in manner that will not affect layout and installation of ceiling panels. D. Beginning of installation shall signify acceptance of conditions in areas to receive ceiling panels. E. Fire-rating requirements: Construction above fire-rated assembly shall meet requirements of UL Design specified in 2: Products.
	3.3 Preparation	A. Field dimensions must be verified prior to installation.
	3.4 Installation	A. Standard reference: Install ceiling panels and suspension system, including necessary hangers, grillage, splines, and other supporting hardware, in accordance with ASTM C636, Cisca Ceiling Systems Handbook, (UL Design) and any applicable code requirement. B. Manufacturer's reference: Install ceiling panels in exposed grid systems, supported on all edges, in accordance with manufacturer's warranty. C. Drawing reference: Install ceiling panels in accordance with approved shop drawings. D. Hanger Wires: - Spacing: Space hanger wires on main tees not more than 48 inches o.c. a maximum of 48" o.c., attaching hangers directly to the structure above, or as required to support loads. - Limitations: Do not support wires from mechanical and/or electrical equipment, piping or other equipment occurring above ceiling. E. Accessories: Install accessories as applicable to meet project requirements. F. Install edge moldings and trim of type indicated at perimeter of acoustical ceiling area and where necessary to conceal edges of acoustical tiles. G. Install suspension system runners so they are square and securely interlocked with one another. Remove and replace dented, bent, or kinked members. H. Panels. - For CELEBRATION panels: install by clipping panels to the underside of the FINELINE grid frame. After installation leave 10 removal tools for maintenance. - For PANZ panels: Install by dropping panels down into grid frame from above.

3.5 Cleaning

- A.** Suspension System: Remove panel material and perform any necessary cleaning maintenance with non-solvent based commercial cleaner.
- B.** Immediately remove any corrosive substances or chemicals that would attack painted finishes (i.e. wallpaper adhesives).
- C.** Touch up all minor scratches and spots, as acceptable, or replace damaged sections when touch-up is not permitted.
- D.** Painting: Repainting of suspension member shall be with high-quality solvent base enamel paint and applied as recommended by paint manufacturer. Ceiling panels may be touched-up by spraying thinned, non-bridging vinyl-acrylic flat wall paint. The type of paint selected and the method of application can alter the acoustical performance and fire ratings of any acoustical product. Therefore, USG Interiors, LLC cannot guarantee that the field-painted panels will match the published performance.
- E.** Removal of debris: Remove all debris resulting from work of this section.

Web Sites

usg.com

sustainableceilings.com

seismicceilings.com

Technical Service

800 USG.4YOU

Samples/Literature E-mail

samplit@usg.com

Samples/Literature/Fax

888 874.2348

Customer Service

800 950.3839

Product Information

See usg.com for the most up-to-date product information.

Note

All products described here may not be available in all geographic markets. Consult your local sales office or representative for information.

Trademarks

The following trademarks used herein are owned by USG Interiors, LLC: ACOUSTIBOND, AURATONE, CELEBRATION, CENTRICITEE, CLIMAPLUS, DIAMONDFLEX, DX, DXL, ECLIPSE, FINELINE, PANZ, USG, USG in stylized letters.

Notice

We shall not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with

current printed instructions or for other than the intended use. Our liability is expressly limited to replacement of defective goods. Any claim shall be deemed waived unless made in writing to us within thirty (30) days from date it was or reasonably should have been discovered.

Safety First!

Follow good safety and industrial hygiene practices during handling and installation of all products and systems. Take necessary precautions and wear the appropriate personal protective equipment as needed. Read material safety data sheets and related literature on products before specification and/or installation.



Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

IC415/ECM/rev. 1-12
© 2012 USG Interiors, LLC
Printed in U.S.A.