

USG COMPÄSSO™ ELITE FOR DRYWALL

EXTRUDED PERIMETER TRIMS - STRAIGHT AND CURVED

USG Compasso Elite for Drywall with
USG Sheetrock Brand Gypsum Panels

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

USG COMPÄSSO™ ELITE FOR DRYWALL COLORS



Primer White


FEATURES AND BENEFITS

- USG Compässon™ Elite for Drywall is an extruded aluminum trim for creating drywall ceiling fascias.
- Easier to install than conventional drywall fascias.
- Available in 2-1/2", 4", 6" and 8" trim heights.
- Can be ordered in standard 10' lengths or custom engineered curves.
- Integrated taping flange for a clean, finished edge.
- Designed for 5/8" thick gypsum board.
- Works with USG Compässon™ Elite attachment clips and splice plates.
- White conversion coat can be field painted or left unpainted.

APPLICATIONS

- Contemporary offices
- Entertainment
- Hospitality
- Healthcare
- Retail
- Education

Perspective

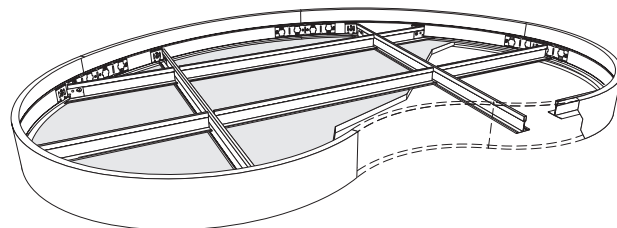

USG COMPASSO™ ELITE FOR DRYWALL
EXTRUDED PERIMETER TRIMS - STRAIGHT AND CURVED

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative
TECHNICAL SERVICES
800 USG.4YOU (874-4968)
FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

COMPONENTS
Trim Profiles

Table with 3 main columns: Materials (Extruded aluminum alloy), Finish (Factory-applied, baked-on polyester conversion coat), and Trim Profiles (2-1/2", 4", 6", 8"). Includes isometric views of inside and outside corners.

Attachment and Finishing Details

USG Compasso™ Elite Drywall Trim Assembly isometric views from above and below
Curved Compasso™ Elite Drywall Trim Assembly isometric views from above and below
USG Compasso™ Elite Drywall Trim Assembly exploded view
USG Compasso™ Elite Drywall Trim Assembly Elevation

FINISHING RECOMMENDATIONS

FOR MORE INFORMATION

1. Setting type joint compound is recommended for the first coat on the taping flange.
2. Apply second coat using ready-mixed or setting-type joint compound.
3. Apply third coat of joint compound if needed.
Note
Use USG Compasso™ Elite splice plates for joining pieces together.
Product literature
Installation guide: IC624
Recycled content
For details, see the LEED report tool at usgdesignstudio.com or cgcdesignstudio.com
Online tools
usgdesignstudio.com or cgcdesignstudio.com
Limitations
Interior applications only.
Notice
We shall not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with current printed instructions or for other than the intended use.

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.