



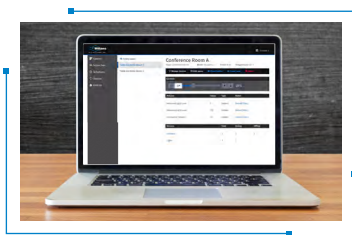

# POWER OVER ETHERNET

The intelligent connectivity solution from Williams.


Over 55 PoE-ready LED luminaires provide turn-key networked lighting and sophisticated controls.



Intuitive user interface allows for quick and simple setup.

Optimize your lighting to meet code compliance and, with built-in analytics, maximize energy savings.

Integrates LED lighting and smart building system applications utilizing the open API to connect your lighting like never before.

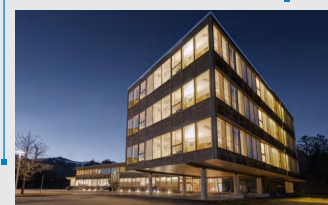



# PRODUCT PORTFOLIO

## RECESSED

**AMD** Multi-function Medical  
**AT1** Architectural Troffer – Curved Floating Center  
**AT2** Architectural Troffer – Curved Deep Center  
**AT3** Architectural Troffer – Straight Floating Center  
**HETL** Lensed High Efficiency Troffer  
**LPT** Low-Profile Troffer  
**LT** Troffer  
**MD2** Asymmetric Medical Bed Light  
**MD4** Dual Function Medical Bed Light  
**MDS** Medical Surgical Troffer  
**PT** Shallow Plenum Troffer  
**RND** Round Architectural Recessed

## SURFACE/WALL

**1SF** Under Cabinet  
**ASM** Architectural Surface  
**ATS1** Architectural Surface – Curved Floating Center  
**ATS2** Architectural Surface – Curved Deep Center  
**ATS3** Architectural Surface – Straight Floating Center  
**AX2W** 2" Wall Mount Architectural  
**AVX** 10" Wide Architectural Vandal Wrap  
**CB** Cornice Bed Light  
**LLMS** Architectural Slimline Surface  
**PTS** Shallow Surface  
**RNDS** Round Architectural Surface  
**WMA** Wall Mount Architectural  
**WMAUD** Wall Mount Architectural Up/Down

## DOWNLIGHTS/CYLINDERS

**2DR** 2" Round  
**4AR** 4.5" Adjustable – Round  
**4DR** 4.5" Round  
**4DS** 4.5" Square  
**4PR** 4.5" Shallow Plenum – Round  
**4PS** 4.5" Shallow Plenum – Square  
**6AR** 6" Adjustable – Round  
**6DR** 6" Round  
**6DS** 6" Square  
**6PR** 6" Shallow Plenum – Round  
**6PS** 6" Shallow Plenum – Square  
**LC6** 6" Cylinder  
**LC7** 7.5" Cylinder

## CONTINUOUS

**CX** Cove  
**LX4** 4" Ambient – Suspended  
**LX4R** 4" Ambient – Recessed  
**LX4S** 4" Ambient – Surface  
**LX4W** 4" Ambient – Wall

## STRIPS

**75** Narrow  
**75R** Round Lens  
**75S** Square Lens  
**75L** Flat Lens

## COVE


**LPC** Low-Profile Wall Mount  
**SMC** Small Wall Mount

## SUSPENDED/HIGH BAY

**AX2** 2" Suspended Architectural  
**AXA** Architectural Contoured Louver  
**GL** Low-Profile Industrial  
**GP** Performance High-Bay  
**LLM** Architectural Slimline Suspended  
**RNDP** Round Architectural Pendant  
**SDIS** Suspended Direct/Indirect

# LIGHTING SYSTEM

Harnessing Power over Ethernet technology with energy-efficient LED fixtures, Williams provides a simple and reliable networked lighting solution.

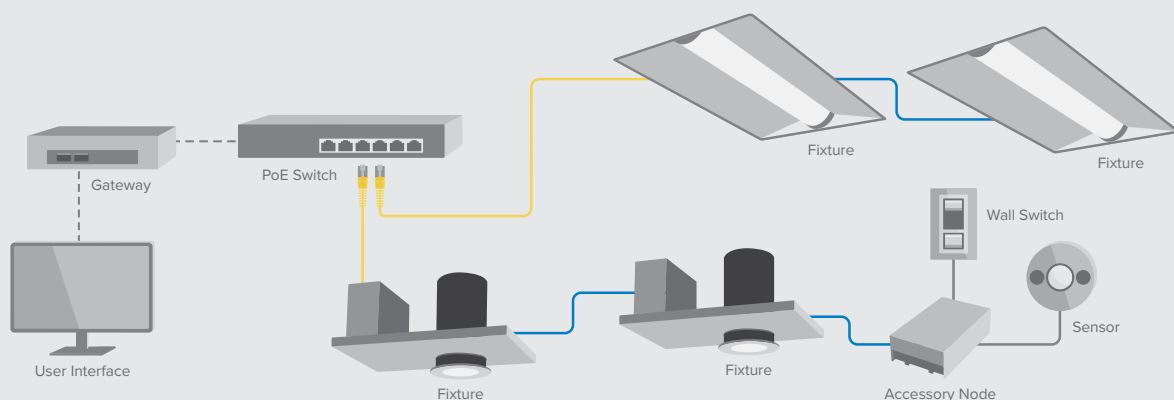

## USER INTERFACE

Provides commissioning & lighting control optimization

## GATEWAY

Host computer for lighting system software

## POE SWITCHES

Routes data between the lighting system & software; provides power to the nodes

## FIXTURES

Nodes connect to the PoE switch to power the fixture & transmit data

## SENSOR & WALL SWITCH

Wire directly to Accessory Nodes to enhance energy savings & control

