

CATALOG #: _____

TYPE: _____

PROJECT: _____

FEATURES

- Long lasting, energy efficient white LEDs
- EXIT or STAIRS message
- Two 6V adjustable Chicago-approved lamp heads
- 6V sealed lead acid, maintenance-free, rechargeable battery
- Low voltage disconnect prevents battery from deep discharge
- Internal solid-state transfer switch automatically connects to internal battery for minimum 120 minutes of emergency operation
- Fully automatic solid-state system on EM units recharges battery in 24 hours
- Remote capacity of up to 10.0 W

SPECIFICATIONS

- HOUSING** – Durable, powder-coated 20-gauge steel construction
- ELECTRICAL** – Universal voltage, 120 or 277 VAC operation.
- MOUNTING** – Wall or ceiling mount.
- LISTINGS** –
 - UL 924 standard as an exit light suitable for dry or damp locations (20°C – 50°C).
 - Meets NFPA 101 Life Safety Code, NEC, OSHA, local and state codes.
 - Meets City of Chicago requirements.
- WARRANTY** – 5-year limited warranty, see hew.com/warranty.

ORDERING EXAMPLE: EXIT/EM/CHICAGO - SF - WHT - DA - OPTIONS - D

ORDERING INFO

SERIES	NUMBER OF FACES	HOUSING COLOR	DIRECTIONAL ARROWS
EXIT/EM/CHICAGO	SF Single face UF Universal single/ double face	WHT Industry-standard white BLK Black	EXIT SIGNAGE NA No Arrows DA Double arrows LA Left arrows ^[1] RA Right arrows ^[2] LARA Left/Right arrow ^[3] STAIR SIGNAGE SWNA Stairs no arrow SWDA Stairs double arrows SWRA Stairs right arrow ^[4] SWLA Stairs left arrow ^[5] SWLARA Stairs left/right arrow ^[6]

OPTIONS	VOLTAGE
RC Remote capable	D 120V or 277V

REMOTE HEADS: SRHL - S - WHT - OPTIONS - 6V ^[7]

SERIES	HOUSING	HOUSING COLOR ^[8]	OPTIONS	VOLTAGE
SRHL Single remote head ^[9]	D Die-cast ^[11]	BLK Black	HL 1.5-watt remote head, 12 LEDs ^[16]	6V 6-volt ^[17]
SDRHL Dual remote head ^[10]	P Polycarbonate ^[12]	GRAY Gray ^[14]		MV Multi-voltage ^[18]
WETRHL Wet location single remote head	S Steel ^[13]	WHT Industry-standard white ^[15]		
WETDRHL Wet location dual remote head				

NOTES

- Single face only.
- Single face only.
- Double face only.
- Single face only.
- Single face only.
- Double face only.
- Optional. Ships separately. See page 2 for REMOTE HEAD DETAILS.
- WETRHL and WETDRHL only.
- Steel housing only.
- Steel housing only.


- WETRHL and WETDRHL only.
- WETRHL and WETDRHL only.
- SRHL and SDRHL only.
- WETRHL and WETDRHL only.
- SRHL and SDRHL only.
- WETRHL and WETDRHL only.
- SRHL and SDRHL only.
- WETRHL and WETDRHL only. For use with 3.6V, 6V, 9.6V, or 12V batteries.

ELECTRICAL INFORMATION

	INPUT WATTS (W)	INPUT AMPS (A)
120V	12.0	0.12
277V	13.0	0.06

MOUNTING DETAILS

WALL MOUNT BOLT CIRCLE PATTERN

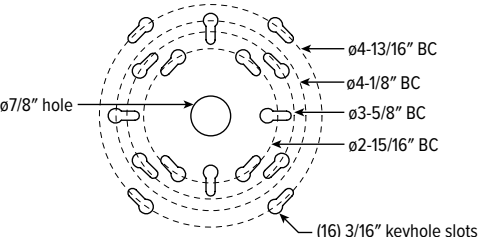

REMOTE HEAD DETAILS

SRHL



DIMENSIONS: 4-1/2" x 6-7/8"

SDRHL



DIMENSIONS: 9-1/4" x 7-1/4"

WETRHL



DIMENSIONS: 4-1/4" x 6-5/8"

WETDRHL



DIMENSIONS: 10-3/8" x 6-3/4"