


## Product data sheet

### Lever handle for glass door locks 162XAG01.230

# HEWI

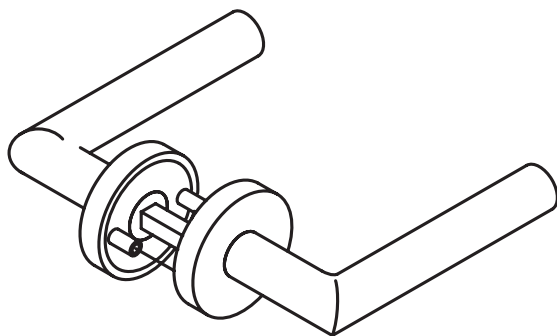

#### Lever handle for glass door locks 162XAG01.230

in H-technology with roses according to DIN 18255 and EN 1906 made of stainless steel, consisting of:

Lever handle 162X... made of stainless steel tube in mitre cut (1.4301), diameter 21.3 mm with 1.5 mm wall thickness, with stepped shoulder guide and groove, with set screw M5 as additional fixing of lever and spindle for optimal transfer of force to door leaf. Easily installed by latching the lever handle into the base parts pre-mounted on the lock. The latching can be released using the dismantling tool. Fits Dorma Junior Office and Schlechtendahl Atelier F / R and Studio - Private Line. The locks are prepared for rose fixing.



Surface satin finished

Roses: model 305.21X..., composite synthetic material and steel rose substructure with black zinc/nickel surface for optimum corrosion protection, integrated spring-assisted restraining "hold-up" module, can be used for left or right-hand opening doors, supporting the lock for longer durability. Fixed rotating bearing of the lever handle with automatically latching all-round locking and 5 mm journal as maintenance-free plain bearing with elastic compensating area, to cancel the possible mounting inaccuracies. Concealed, non-loosening screwed joint with M5 stainless steel screw and sleeve combination as well as the pivot disappearing into the leaf.

Rose masking cap round, made of stainless steel (1.4301), diameter 55 mm, 10.5 mm high, 1.5 mm wall thickness.

Article no.: HEWI 162XAG01.230

#### Dimensions

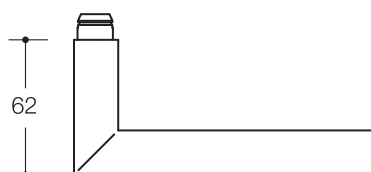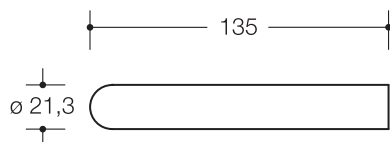

#### Surface

XA | satin

Technical information subject to alteration, March 19th, 2020

HEWI Inc.  
350 Fifth Avenue, Suite 5220 Phone: 866 853-8003  
New York, NY 10118

hewi@hewi.us  
www.hewi.com