

Fire door fitting set 162PBR11.230

in R-technology with roses according to DIN 18255 and EN 1906 made of matt polyamide, high gloss surface, consisting of:

Lever handle model 162.21PB... in mitre cut, made of matt polyamide with continuous steel core into the end of the lever handle, solid colour, diameter 21.3 mm, with stepped shoulder guide and groove, easily installed by latching the lever handle into the base parts pre-mounted on the door. The latching can be released using the dismantling tool. Roses: model 305.21PB... and 306.23PBFS, composite synthetic material and steel rose substructure with black zinc/nickel surface for optimum corrosion protection, integrated spring-assisted restraining "hold-up" module, can be used for left or right-hand opening doors, supporting the lock for longer durability. Fixed rotating bearing of the lever handle with automatically latching all-round locking and 5 mm journal as maintenance-free plain bearing with elastic compensating area, to cancel the possible mounting inaccuracies. Concealed, non-loosening screwed joint with M5 stainless steel screw and sleeve combination as well as lug disappearing into the door leaf.

Rose cover cap, round, made of matt polyamide, solid colour, diameter 55 mm, 10 mm high, 1.5 mm wall thickness.

Designed and tested for contract use, category of use according to EN 1906 - Class 4 fire door set with square spindle 9 mm, according to DIN 18273

Category of use: Class 4

Durability: Class 7

Door mass: No classification specified

Fire resistance: Class D1

Security: Class 1

Corrosion resistance: Class 4



Anti-burglar protection: Class 0

Design type: U


Article no.: HEWI 162PBR11.230



Dimensions

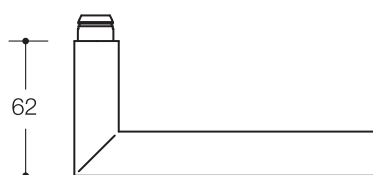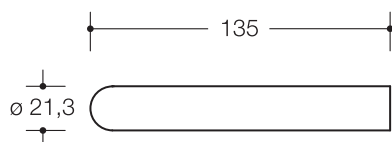

Colors



Polyamide, mat

Alternative colors



Polyamide

Technical information subject to alteration, June 9th, 2020

HEWI Inc.
350 Fifth Avenue, Suite 5220 Phone: 866 853-8003
New York, NY 10118

hewi@hewi.us
www.hewi.com