


## Product data sheet

Duo swing-up grab bar, design (A), System 900  
900.50.141XA

# HEWI

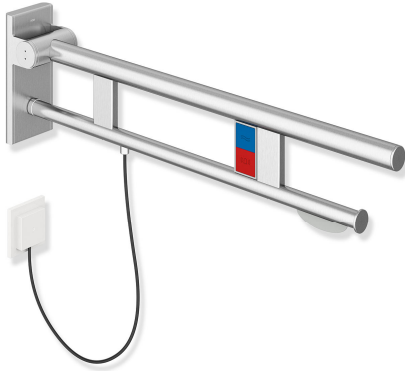

Similar picture


### Duo swing-up grab bar, design (A), System 900 900.50.141XA

- two parallel, round gripping levels arranged on top of each other
- with toilet paper holder and flushing mechanism/function buttons (model E)
- right-hand version
- can be folded up and curved to fold down
- blue button (wave symbol) for triggering the toilet flushing mechanism, red button (bell symbol) for triggering a freely definable function. (The function button does not fulfil the requirements for an emergency call according to DIN VDE 0834-1)
- cable with bare wire ends for wall connection
- including white cover for flush-mounted box
- control voltage max. 30 V = SELV, PELV, switching current up to max. 2 A
- suitable for all standard concealed cisterns with electrical control
- projection 35 7/16 inch (900 mm), 8 1/4 inch (210 mm) high and 4 inch (101 mm) wide, top grab bar diameter 1 5/16 inch (33.7 mm), bottom grab bar diameter 1 inch (25 mm)
- load capacity up to 220 lbs (100 kg)
- made of stainless steel, matt sanded
- for mounting with non-corrosive and tested HEWI fixing materials for different wall systems (to be ordered separately)
- sealing tape for sealing the fixing points is included in the scope of supply
- floor supports 900.50.020XA and 900.50.021XA for retrofitting
- CE marking as per directive 93/42/ EWG
- fulfils the ÖNORM B1600/1601 requirements



CE

## Dimensions

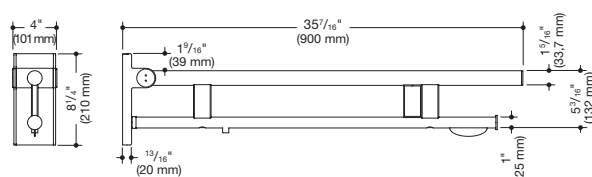

### Surface



### Alternative surfaces

Chr	DX	DC	AY	SC
-----	----	----	----	----

Technical information subject to alteration, March 20th, 2020

HEWI Inc.  
350 Fifth Avenue, Suite 5220 Phone: 866 853-8003  
New York, NY 10118

hewi@hewi.us  
www.hewi.com