

Currents

Price List
March 2020



Knoll

Introduction	Knoll and Sustainable Design	2
	Introduction to Currents	3
	Currents Textiles	6
	Currents Color Program	7
	Currents Legacy Finishes	8
	Introduction to Upstart	9
	Original Upstart Planning Examples	10
	Upstart Color Program	12
	Upstart Legacy Finishes	13
Service Walls and components	Service Wall frames	14
	Fence frames	15
	Crown and raceway covers	16
	Structural base cover kits	17
	Access covers	19
	Wall ends and connectors	26
	Wall frame accessories	32
	Spine ends and connectors	34
	End Starters	36
	Panel system starters and T-ends	37
	Panel system starters for Dividends Horizon	41
	Power, data and communications components for Service Walls	42
Screens and add-up panels	Mobile screens	50
	Add-up panels	51
	Add up glass panels, for spine	52
	Add-up panel connectors and fillers	53
	Stackable add-up panels	55
	Stackable add-up connectors and fillers	59
Worksurfaces	Worksurfaces, universal	63
	Currents Stiffeners	69
	Cascade edge worksurfaces	70
	Worksurface, samples	76
	Worksurface supports	77
Floorstanding storage	Pedestal accessories	79
Counter Surface	Counter surface	81
Desks and worktables	Desks	82
	Worktables	90
Upstart table desks and storage	Upstart Tables	93
	Plannable Upstart Tables	98
	Accessories	107
	Upstart Privacy Screens	108
Wall Mounting of Knoll Products		109
Alpha-Numeric Index		111
Selling Policy		115
KnollKey Lock Program		117
General Ordering Information		118

Knoll and Sustainable Design

Each year Knoll sets key initiatives in the journey to sustainability. Focused on our impact to people and planet, Knoll reports material health product attributes and sets operational targets to reduce greenhouse gas emissions, waste generation and water use (in our North American facilities.)

Material transparency is a core Knoll sustainable design value, enabling us to optimize the design and performance of our products. Our material health program utilizes independent third-party certifications that provide an impartial and trustworthy foundation for industry-wide transparency. Certification by respected third parties ensures that all manufacturers are held to the same high standards. Knoll certifications include: Forest Stewardship Council (FSC®), Intertek's Clean Air Program, Business and Institutional Furniture Manufacturer's Association (BIFMA) LEVEL® certification, International Living Future Institute's (ILFI) Declare labelling and Certified Environmental Product Declarations. In addition, Knoll is aligned with the U.S. Green Building Council and can help organizations achieve credits for Leadership in Energy and Environmental Design (LEED®), WELL and the Living Building Challenge (LBC) building certifications.

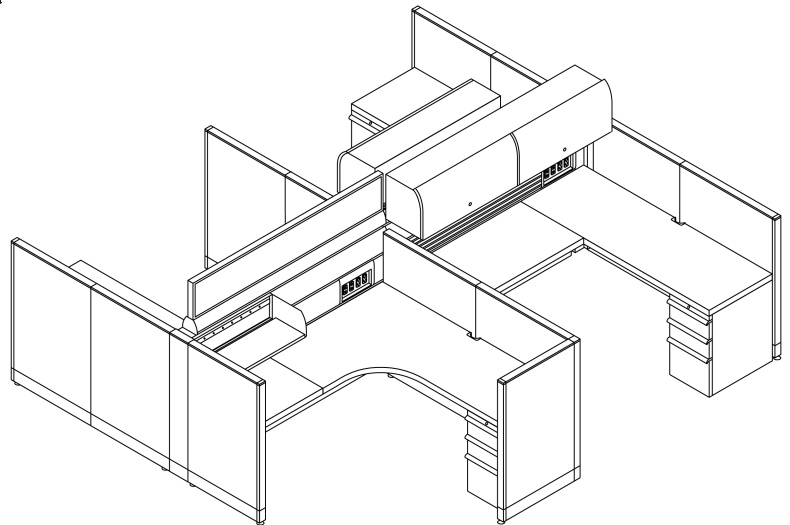
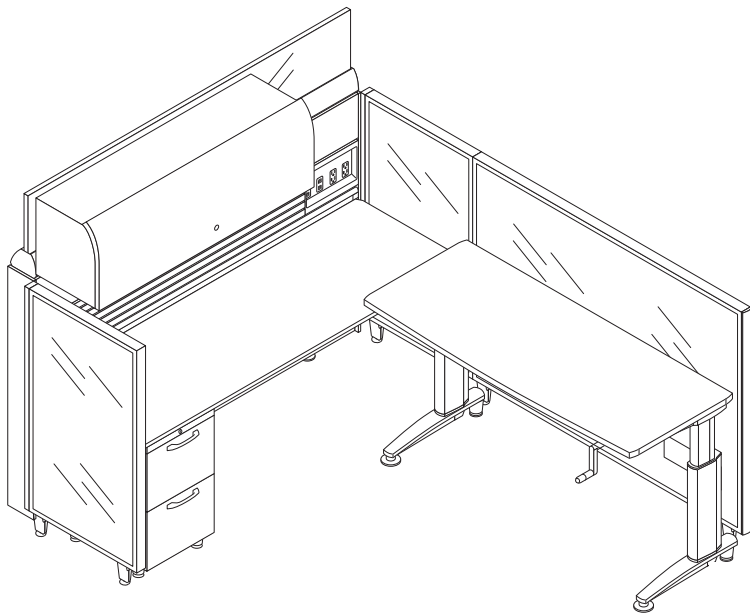
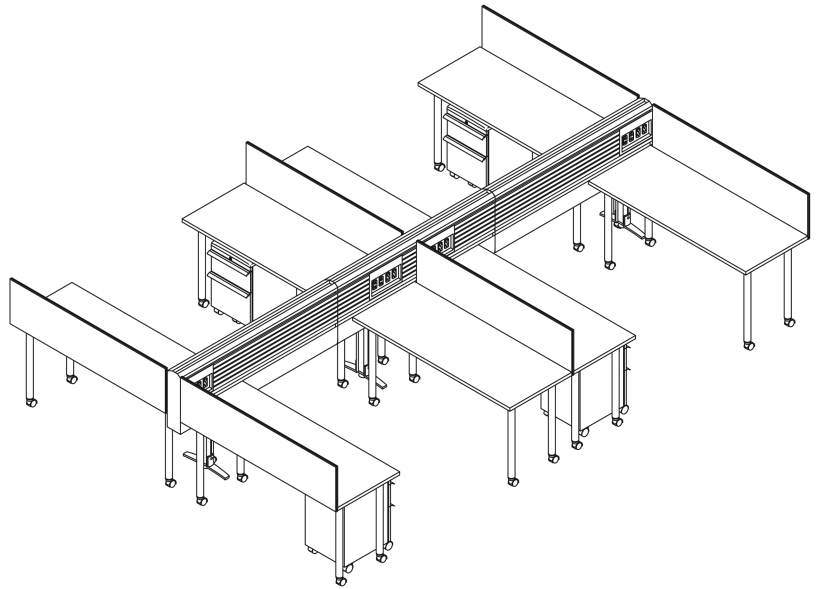
In our manufacturing operations, we focus on efficiency and impact. Knoll Office and Knoll Europe manufacturing locations are ISO 14001:2015 certified. Knoll sets objectives and targets to reduce energy, water and waste. These initiatives are part of a long-term strategy to further reduce energy consumption and lower our carbon footprint.

We also believe in helping our customers find viable options when decommissioning furniture or other related assets. ANEW's Full Circle Program, in partnership with Knoll, allows customers to leverage buy-back and re-sale programs as well as explore options for repurposing or recycling that mitigate landfill impact through energy-from-waste conversion.

For more information about Knoll and sustainable design, visit www.knoll.com/environment.

Currents creates dynamic, advanced performance work environments from coordinated, independent elements – Service Walls, Fence frames, plannable desks, mobile storage – and existing Knoll office products.

Currents workspaces may be spine-supported or freestanding, or planned in combination with conventional panel systems.



Currents Service Walls

Currents Service Walls form the structural core and primary path of services distribution for a cluster of workstations. Currents Service Walls may also create borders for team workspaces, conference areas, or corridors. Service Walls are 5" thick, and are available in three heights: 39" for seated visual access; 48" for seated privacy, the most versatile height for open plan areas requiring some overhead storage; and 64" for standing privacy in executive or conference areas.

Service Walls are composed of frames and covers. Frames include studs on 12" centers, base raceway with levelling glides, crown and base. Frames may be specified with 1"H compact crown or 4"H standard crown. All studs have brackets to support covers at 5", 21", 30", 39", 48" and 64" above the floor. Crown and raceway covers, structural base covers from 5" to 21" above the floor, and covers above 21" must be specified separately.

Structural base covers enable perpendicular panels, worksurface supports, or outriggers to be attached at any point. Structural base covers may be painted steel, perforated, or upholstered.

Wall covers above 21" snap into wall frame brackets at 12" intervals, and are removable without tools. Covers may be painted, upholstered, acoustical/tackable upholstered, cable tray, slat wall, or marker surface.

Currents Walls plan in any combination of 48", 60" or 72" widths corresponding to the total length of Wall required. Add outriggers, T-end and L-end panels, or 90° or 120° post connections at each end of Service Wall spine. Straight connectors are included with each frame kit to join frames of the same height in a straight line. High-low straight connectors are available separately. Service Walls require outriggers or perpendicular systems panels every 8'.

Power components are specified separately. Knoll universal 2+2 or 3+3 power components may be installed in the base of the Wall or at worksurface height. Base power rails accept two duplex outlets on each side of a panel at raceway height. Desk-height outlet modules accept two duplex outlets on each face above or below the worksurface. One or two modules (four duplex outlets each side) may be located in any 12" wide stud bay. Locate outlet modules and related 12"W outlet covers before specifying widths of adjacent panel covers.

The interior of the Wall between 21" and the crown offers unobstructed, 1" deep, lay-in cabling on each surface. Vertical wire management and excess cord capability is unobstructed 2 1/2" x 10" between studs.

Service Walls with standard 4"H crown enable upmounted shelves, overhead storage cabinets, and canopy lighting at any point on one or both sides. Upholstered or frameless glass add-up panels fit into a center channel anywhere along the crown for 12", 21" or 28" of additional enclosure.

Stackable add-up panels are also available in upholstered, marker or glazed surface. First up panels are 12", 21" or 28" high; next up stacking panels are 16" high.

First up panels can be mounted on any 3" increment along Service Wall crown.

Wall mounted components

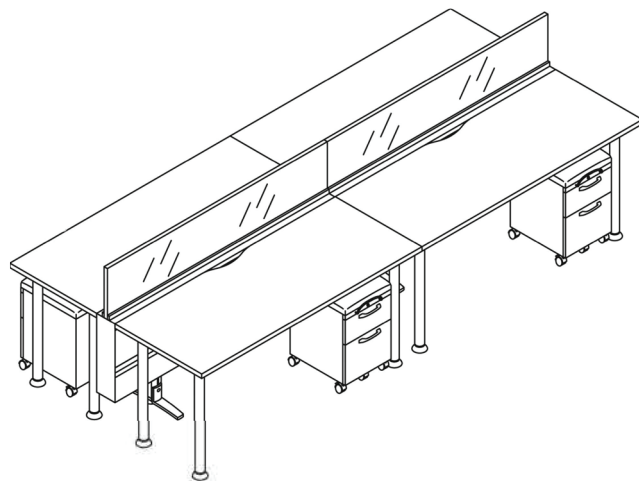
Worksurface supports and systems panels may be connected to the Currents Wall at any point. Mobile screens are also available, in an upholstered surface.

Currents worksurfaces are designed for computer use as the primary work activity. Deep corners are shaped for large monitors, and include wide keyboard/mouse areas. Straight worksurfaces feature softly curved or flat fronts. Extended corners incorporate an adjacent work area and a computer corner into a single, uninterrupted surface. Universal worksurfaces include a steel stiffener for high load capacity and cord management.

Service Walls cantilever worksurfaces up to 24"D, or provide end support for any size worksurface. Support columns, independent C-legs, and floorstanding pedestals are also available for worksurface support. Cantilevers are adjustable in 1" increments for 24"-34"H worksurface. End support brackets and C-legs are fixed height for 28"H worksurface, or adjust for 24"-34" worksurface height.

Service Wall standard height 4"H crowns can upmount open shelves, overhead storage, task and ambient lighting, and add-up panels.

Service Wall standard height 4"H crowns can upmount or downmount open shelves or Equity overhead at any point. Equity overheads can only be downmounted from Walls with 1"H compact crown. Brackets are available to downmount Dividends, Series for Dividends or Equity overhead cabinets from 64"H Service Wall with either compact or standard crown.



Currents Desks

Currents desks are freestanding furniture elements optimized for the high-mobility, computer-based office. Currents corner desks and mobile pedestals can work together to form efficient, two-element workstations.

Currents desks are height-adjustable. Pin-set version has range of 24" to 30"H in 1" increments. Handcrank version lets the user adjust continuously from 24" to 34"H. Desks have C-legs for knee clearance, and have interchangeable rear casters or glides for easy mobility.

All desks include horizontal and vertical cable managers.

Desks are available in corner, extended corner, and curved-front straight shapes. Worksurface corners are eased to make alignment of mobile units less critical.

Desks and wall-mounted worksurfaces accept clamp-on workshelves. Workshelves provide convenient binder/book access adjacent to computer displays.

Currents Worktables

Currents mobile worktables extend the worksurface area and provide flexible guest/conference spaces. Rounded corners enable informal placement near other worksurfaces. All worktables are available with casters or levelling glides.

Adjustable height worktables adjust from 24" to 30" high in 1" increments.

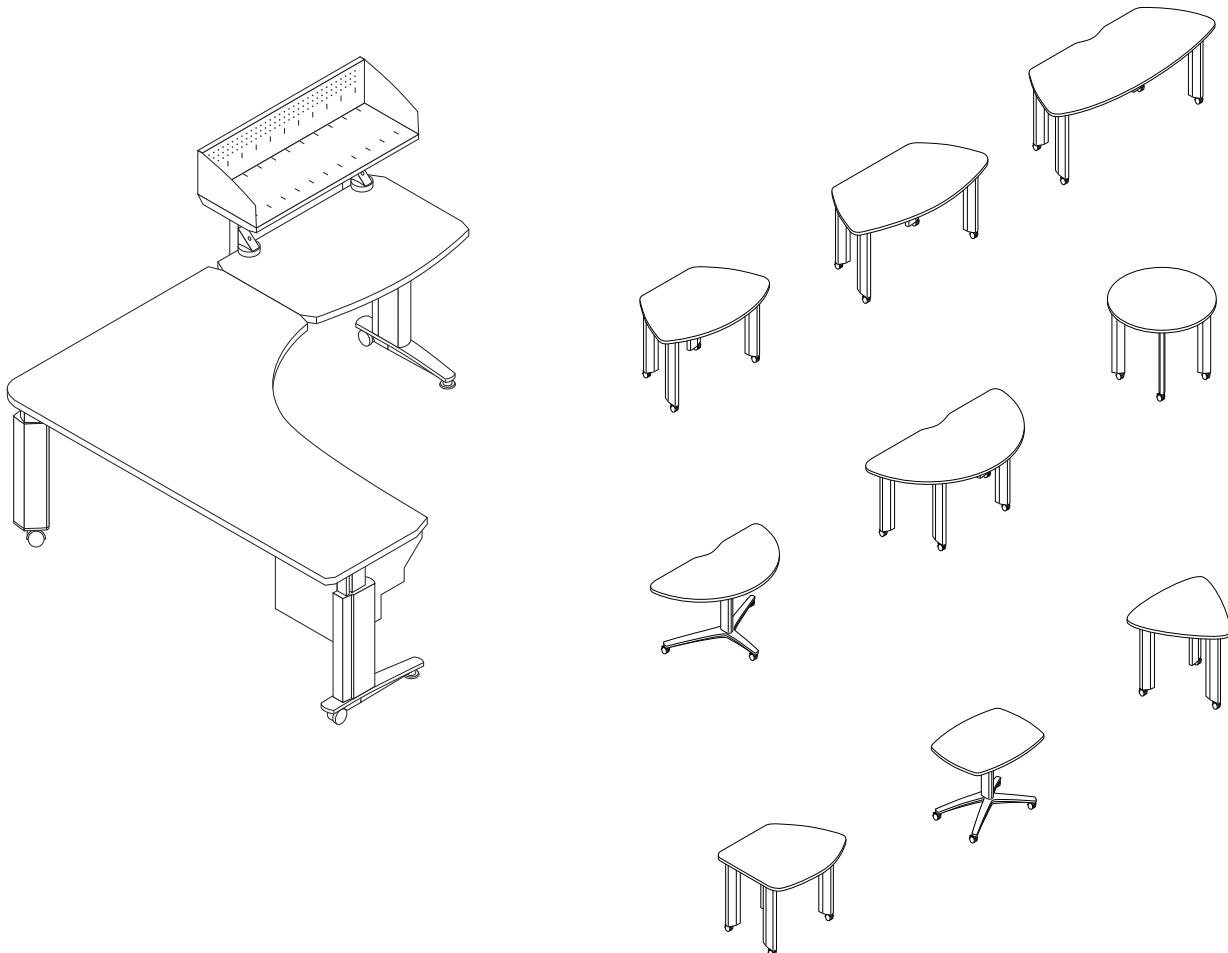
Currents Storage

Currents freestanding storage components are designed for mobility and space efficiency.

Pedestals are available mobile or fixed, with 2 files or combination 4" personal, 7" data, and 11" file drawer fronts, fitting below standard 28" worksurface height. Data/file mobile pedestals are low enough to roll under desks set lower than 28". Mobile pedestals include top, casters and handle. Fixed pedestals include 2" levelling glides.

Reuter vertical storage has a rotating door, shelves and pull-out file frames, and a wardrobe area. Reuter storage is 21" wide so open door fits within 24" planning footprint.

Reuter vertical storage is available 48"H, with painted or worksurface top, or 64"H with painted top only.



**Approved for Wall covers,
mobile screens and
privacy screens**

Fabric Group 10

Annex (W1360)
Beacon (W1597)
Broadcloth II (W1619)
Circuit (W1754)
Element (W1077)
Messa (W20611)
Pivot (W1926)
Symbolic Details (W693)
Skylark (W1718)
Tailor Made II (W1610)
Twister (W1923)
Versatility (W432)

Fabric Group 20

Circle Line (W1146)
Criss Cross (W305)
Delite (K2026)
Edo (W2111)
Infinite (K2263)
Logic (W1318)
Mainframe (W1783)
Nematic II (W1620)
Photon II (W1695)
Ponder (W2382)
Reflect (W884)

Fabric Group 30

Match Point (W1145)
Micro (W465)
Relay (W1020)*

Fabric Group 40

Amplify (W1215)
Bandwidth (W1219)
Crossroad (K2085)
Hourglass (K1523)
Palladium (W1030)
Spellbound (W1464)

Fabric Group 50

Presto (K1000)

Fabric Group 55

Ransom (K1298)
Ransom (K2398)

* Screen only

Additional textiles are available on linkable screens and stackable add-up panels: see Morrison price list for approved fabrics.

Customer's Own Material is subject to an application testing fee of \$750 per fabric and a \$2500 fee for UL testing. Fabric requirements - application test, 10 yards; UL test, 15 yards. COM is also subject to extended leadtimes. COM panels are priced at Group 10 plus cost of fabric.

**Approved textiles for
Currents Mobile Pedestal
Cushions**

Abacus 🍷
Aegean
Alignment 🍷
Arno 🍷
Aswan
Atelier
Atlas
Attire
Axiom (tr)
Backdrop
Bank Shot 🍷
Baxter
Beacon
Belize
Biota 🍷
Biscayne
Bistro 🍷
Bocce 🍷
Boundary 🍷
Cairo
Cameo
Cato
Century
Chameleon
Chance
Charm
Chroma 🍷
Chronicle 🍷
Circa
Classic Boucle 🍷
Close Knit
Common Ground 🍷
Commuter Cloth 🍷
Compass CR
Cornaro
Coterie
Cross Tech
Crossroad
Cuddle Stripe
Dahlia CR
Dapper
Delite
Demure
Djenne
Diva
Double Agent (tr)

Dristi (tr)
Dune
Durand
Dynamic
Earthwork 🍷
Eclat Weave
Entourage 🍷
Entwine
Essence
Fancy Twill
Ferry
Fibra
Firefly
Forza (tr)
Fox Trot CR
Framework 🍷
Floressence
Galla II 🍷
Gibson
Glider
Grande
Grandview
Greenwich
Haze
Heavy Metal
Helios
Highland
Holbrook
Hologram
Hourglass
Hudson
Icon
Ikat Stripe
Innuendo
Intrigue
Island
Jasmine
Journey 🍷
Kampala
Katazome
Keaton
Kimono
Kingston
Knoll Felt 🍷
Knoll Hopsack 🍷
Kora CR
Lagos
Legend CR
Liberty
Limani
Lore CR
Ludlow
Lyric
Magnolia
Mariner
Marquee
Masquerade
Melange
Melody (tr)
Menagerie
Meroe
Midpoint
Milestone
Mod Plaid
Monarch 🍷
Moto CR
Nature Walk
Night Life

Noble
North Island
Obi
Origins
Palisade
Panache CR
Paradigm
Pedal Pusher (tr)
Petite Floral
Pogo 🍷
Prairie (tr)
Prep 🍷
Presto 🍷
Prim 🍷
Quark
Radiance
Ransom 🍷
Rattan
Reflect
Regard CR
Retreat
Ricochet 🍷
Rio
Rivington
Roam
Roundtrip 🍷
Rush Hour
Sahara CR
Sandpiper CR
Sequin CR
Serendipity
Sherman
Sinclair
Smart (tr)
Soiree 🍷
Soliloquy
Sonnet 🍷
Soon
Spark 🍷
Spencer
Spree 🍷
Stacks
Star Struck
Stepping Stones
Striae Stripe
Stripe It
Summit
Sutton 🍷
Swing
Synth 🍷
Tabloid 🍷
Theory (tr)
Tight Rope (tr)
Tilden (tr)
Tinge (tr)
Topography
Totem
Tower Grid
Treble CR
Trophy
Tryst
Ultrasuede 🍷
Utmost II
Utopia
Utrillo
Vatera
Venue
Versa 🍷

Versatility
Vibe II (tr)
Vice Versa
Vinyl (tr)
Westwood
Whip
Wit
Woodland
Yeni
Zari CR
Zipline 🍷
Zoom

Pedestal cushions are upholstered (from the front to the back of the pedestal) with the fabric direction matching the textile sample.

**Approved Spinneybeck
Leathers for Currents
Mobile Pedestal Cushions**

Alaska
Amazon
Andes
Arizona
Cervo
Copenhagen
Cordovan
Derby
Distressed
Ducale
Ducale Velours
España
Maremma
Marissa
Prima
Riva
Sabrina
Saddle
Salon
Velluto Pelle
Volo

🍷 = CAL 133 Pre-approved

* Textile and leather grades are found in the Office Seating Textile Matrix and Office Seating Leather Matrix.

Core finishes

Specify Core finishes for all new customers

Core	Legacy	Wall covers	Wall ends, trim, brackets and outriggers	Storage fronts	Storage cases	Work-surfaces and shelves	Currents work-sur-face edges	Pedestals and Reuter Over-head
611	Beige Mist Metallic	•	•	•	•			P2
118	Bright White	•	•	•	•	•		P3
112	Brown	•	•	•	•			P1
123	Brushed Grey					•		
122	Brushed Sand					•		
113	Dark Grey Y3	•	•	•	•			P1
128	Fog					•		
114	Folkstone Grey LA/U	•	•	•	•	•		P1
111	Jet Black	•	•	•	•	•		P1
124	Medium Cherry					•		
115	Medium Grey Y2	•	•	•	•			P1
612	Medium Metallic Grey J	•	•	•	•			P2
121	Micro Grey					•		
129	Micro Sand					•		
126	Natural Cherry					•		
125	Natural Maple					•		
119	Pumice F					•		
116	Sandstone	•	•	•	•			P1
613	Silver 3	•	•	•	•			P3
117	Soft Grey E/M42	•	•	•	•	•		P1
813	Trim Grey 5						•	
127	Walnut					•		
V1	Maple Techgrain® 4/M			638		638		638
V1	Cherry Techgrain® 6/R			639		639		639
V2	Maple K			006		006		006

Default trim information:

Trim Grey is the integral color for worksurface, desk and worktable top edge, mobile screens, and add-up panel trim, privacy screen and window trim, pedestal pulls.

Black: wall frames and drawers interior, wall, screen, storage glides and casters.

Light grey: Ambient lights

Translucent crystal: fiberglass surfaces for mobile screens and add-up panels

The new Core finish 113 Dark Grey is not a match to the Currents Legacy finish NV. It is a match to the Dividends Legacy finish Y3.

The new Core finish 115 Medium Grey is not a match to the Currents Legacy finish NJ. It is a match to the Dividends Legacy finish Y2.

Veneer finishes for Currents worksurfaces and storage fronts are available through Custom Product Development.

Wood Finishes

New codes begin with a three digit numeric sequence, followed by a letter suffix. Each letter suffix (A-F) represents a different combination of pore fill options and gloss levels.

Gloss Level	Fill Level
A Low Gloss	Closed Pore
B MediumGloss	Closed Pore
C High Gloss	Closed Pore
D Low Gloss	Open Pore
E Medium Gloss	Open Pore
F High Gloss	Open Pore

Edge Options for Veneers

WOOD	Complementary
SYN	Wood Complementary Synthetic
WPLY	Wood Ply Edge *
SPLY	Synthetic Ply Edge *

* Ply Edge available on Birch (037) worksurfaces.

		Work-surfaces	Wall and Structural Base covers	Crown Covers	Crown end caps, connectors and connector top caps, raceway covers, worksurface brackets and outriggers	Straight legs, C-legs, corner legs, desk screen clamps, window frames (textured only)	Storage fronts	Storage Cases
Plastic Laminates	Light Grey	L						
	Pumice	F						
	Winter grey	V						
	Slate	S						
	Snow	B						
	Folkstone Grey	U						
	Pearwood	PA						
	Fiber	E						
	Sand	D						
	Medium Grey	G						
	Soft grey	M42						
Wood Grain Laminates	Clear Maple	CM						
Veneer Group 3	Maple	K					K	
	American cherry	X					X	
	Medium red mahogany	Z					Z	
Paint Group 2								
	Metallic Flint *		2	2	2	2	2	2
	Light metallic grey *		U	U	U	U	U	U
	Medium metallic grey *		J	J	J	J	J	J
	Dark metallic grey *		V	V	V	V	V	V
	Light metallic tan *		W	W	W	W	W	W
	Metallic beige *		H	H	H	H	H	H
	Soft Grey *		E	E	E			
	Medium Grey (Slate) *		Y2	Y2	Y2			
	Taupe *		R	R	R			
Paint Group 3	Aluminum			A				
	Silver *		3	3	3	3	3	3
	White *		B	B	B	B	B	B

Specify legacy finishes to match existing product only. Legacy finishes are not available for new customers.

Trim grey is the integral color for worksurface, desk and worktable top edge, mobile screen and add-up panel trim, privacy screen and window trim, pedestal pulls Wall, screen and storage glides, glide cones and casters are integral color Black.

Wall frames and pedestal drawer interiors are painted Black.

Ambient lights are painted Light grey

Fiberglass surfaces for mobile screens and add-up panels is Translucent crystal

Note: Add 10% to the list price of any laminate product when specifying a legacy laminate.

Knoll Upstart is a collection of tables, screens and services distribution components for computer-intensive, active, and open work environments.

Upstart plans as single-surface, L- or U-shape workstations, or freestanding worktables in combination with other systems furniture. Tables are available on casters or glides and are adjustable in height.

Original Upstart tops have a plastic laminate surface with a continuous T-mold edge. The corners of Original Upstart tops are rounded. Original Upstart legs are curved.

New Plannable Upstart tops have a plastic laminate or Veneer surface with a T-mold edge on the front and a thin edgeband on the sides and back. The corners of Plannable Upstart tops are 90 degrees and allow two tables to meet at right angles. Plannable Upstart legs are straight.

Complementary products include Currents workshelves, which clamp on to Upstart tables, mobile screens, Service Wall, monitor supports and desktop accessories. Consult the Currents and KnollExtra price lists for product details and pricing.

Screens

Upstart screens mount to the back edge of Original Upstart tables to provide seated visual privacy at a horizon of 39 or 48 inches. Upstart Screens are available in translucent or marker surface, and may be combined with magnet rail.

Plannable Upstart tables use Network upholstered screens, which are available in a variety of sizes.

Accessories

Flat Bracket

Bracket joins 2-legged table to another Upstart table at same height.

Cable Tray

Cable tray adds on to worksurface stiffener to control cable bundles and power strips (where permitted by code).

Important Note: Plannable Upstart straight legs may not be used with Original Upstart tops due to stability issues.


Note to Knoll Dealer Sellers:

The products contained in this price list are also available through the Knoll Essentials program, with limited exceptions. For additional information, please contact your customer service representative or visit Knoll Exchange.

Primary and Secondary Worksurfaces

Original Upstart


Rectangular table desk/Return




Corner table desk, 120°



Extended Corner table desk




Y-shape table desk, M-shape table desk



Conference Worksurfaces

Original Upstart


Round, Half round table desk




Oval table desk



Wiper table desk, Tripod table




48 x 24 Original Upstart




New Plannable Upstart

Rectangular table desk/Return




Corner table desk, 90°



Extended Corner table desk




P-shape table desk




New Plannable Upstart

Half round table desk




48 x 24 Plannable Upstart




Basic stand-alone Y desk


- the core Upstart application
- 30" x 72" nominal shown; conference depth is approximately 36"

**Oval table with Y desk**


- 36" x 66" oval table
- 30" x 72" Y return

**Curved wiper with Y desk**


- wiper 66" W
- 30" x 72" Y return

**Y desk with 42" round table**


- conference table

**Rectangular table with bracketed return surface**


- 72" x 76" approximate footprint
- optional work shelf

**Y desk with tripod table**


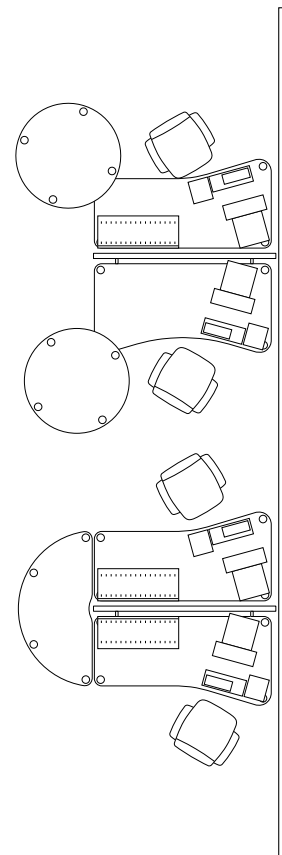
- 30" x 72" Y desk, work shelf, and mobile pedestal

**Dual-monitor M desk with tripod table**

- 30" x 72" nominal M desk

**Dual-monitor M desk workstation**


- 72" x 100" approximate footprint
- optional work shelf
- flat ends allow placement along wall

**Y and M back-to-back, with 42" conference tables****Y desks back-to-back, with half-round shared table**


- please note 1.75" setback from the back edge of each top to module line, same as Currents desks.

Y desk with Upstart storage


- 72" x 96" footprint
- 72" table with screen
- mobile pedestal and tower

**Extended corner desk and tower**


- 72" x 72" footprint
- 48" and 72" screens
- mobile pedestal and tower

**Extended corner desk and adjacent worktable**


- 72" x 96" footprint
- 72" x 48" corner and 48" straight desks
- mobile pedestal and privacy screen

**Upstart 120° planning**

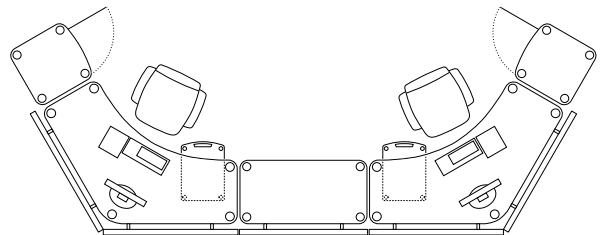
- group of three 120° corners
- 48" shared privacy screens
- mobile pedestals

**U-shape plannable desks**

- 96" x 96" footprint
- two 48" x 72" extended corners
- mobile pedestal and tower
- 72" privacy screen

**Upstart work group**

- 120° corners and shared worktable 48 x 24"
- mobile pedestals and towers
- 48" privacy screens



Core finishes

Specify Core finishes for all new customers

Core	Legacy	Table legs, screen brackets, magnet rail	Upstart Worksurfaces	Plannable Upstart Worksurfaces	Upstart Worksurface edges	Plannable Upstart Worksurface edges
611	Beige Mist Metallic	•				
118	Bright White	•	•	•	•	•
112	Brown	•				
123	Brushed Grey		•	•		
122	Brushed Sand		•	•		
113	Dark Grey Y3	•				
128	Fog		•	•	•	•
114	Folkstone Grey LA/U	•	•	•	•	•
111	Jet Black	•	•	•	•	•
124	Medium Cherry		•	•		
115	Medium Grey Y2	•				
612	Medium Metallic Grey J	•				
121	Micro Grey		•	•		
129	Micro Sand		•	•		
126	Natural Cherry		•	•		
125	Natural Maple		•	•		
119	Pumice F		•	•	•	•
116	Sandstone	•				
613	Silver 3	•				
117	Soft Grey E/M42	•	•	•	•	•
813	Trim grey 5				•	•
127	Walnut		•	•		
	Translucent orange O				•	
	Translucent blue P				•	
	Frosty white W				•	
	Light grey (integral) U					
	Glider grey (integral) G1					
638	Blond Maple 4/M			•		
639	Light Cherry 6/R			•		
006	Maple K					

Default trim information:

Trim Grey is the integral color for caster and glide leg levellers and screen corners

Black: flat bracket, cable tray and casters

Screen available in Ribbed Polycarbonate or Marker surface

Veneer finishes for Plannable Upstart worksurfaces are available through Custom Product Development.

For Plannable Upstart Veneer Group 1, only black or trim grey edgebands can be specified.

Translucent orange, Translucent blue, and Frosty white edgebands are not available for Plannable Upstart tables.

Wood Finishes

New codes begin with a three digit numeric sequence, followed by a letter suffix. Each letter suffix (A-F) represents a different combination of pore fill options and gloss levels.

Gloss Level	Fill Level
A Low Gloss	Closed Pore
B MediumGloss	Closed Pore
C High Gloss	Closed Pore
D Low Gloss	Open Pore
E Medium Gloss	Open Pore
F High Gloss	Open Pore

Edge Options for Veneers

WOOD	Complementary
SYN	Wood Complementary Synthetic
WPLY	Wood Ply Edge *
SPLY	Synthetic Ply Edge *

* Ply Edge available on Birch (037) worksurfaces.

Specify Legacy Finishes for existing customers only. Legacy Finishes are not available for new customers.

		Table legs, screen brackets, magnet rail	Worksurfaces	Worksurface edges
B	Snow		•	
L	Light grey		•	•
E	Fiber		•	
V	Winter grey		•	
S	Slate		•	
F	Pumice		•	•
U	Folkstone grey		•	•
M42	Soft grey		•	•
D	Sand		•	•
CM	Clear Maple		•	
PA	Pearwood		•	
WM	Warm Cherry		•	
5	Trim grey			•
N	Black			•
O	Translucent orange			•
P	Translucent blue			•
W	Frosty white			•
N2	Flint			
NU	Light grey			
NJ	Medium grey			
NV	Dark grey			
NW	Light Tan			
NH	Beige			
3	Silver	•		
B	White	•		
2	Metallic flint	•		
U	Light metallic grey	•		
J	Medium metallic grey	•		
V	Dark metallic grey	•		
H	Metallic beige	•		
W	Light metallic tan	•		
E	Soft grey	•		
K	Maple			
U	Light grey (integral)			
G1	Glider grey (integral)			

Default trim information:

Trim Grey is the integral color for caster and glide leg levellers and screen corners



Black: flat bracket, cable tray and casters

Screen available in Ribbed Polycarbonate or Marker surface




For Plannable Upstart Veneer Group 1, only black or trim grey edgebands can be specified.

Translucent orange, Translucent blue, and Frosty white edgebands are not available for Plannable Upstart tables.





NOTE: Add 10% to the list price of any laminate product when specifying a legacy laminate.

description	type	w	d	h	pattern no.	black
	39"H	48"	5"	43"	APF1 3948	\$688.
		60"	5"	43"	APF1 3960	790.
		72"	5"	43"	APF1 3972	978.
	48"H	48"	5"	52"	APF1 4848	756.
		60"	5"	52"	APF1 4860	866.
		72"	5"	52"	APF1 4872	1,080.
	64"H	48"	5"	68"	APF1 6448	899.
		60"	5"	68"	APF1 6460	1,029.
		72"	5"	68"	APF1 6472	1,287.
	39"H	48"	5"	40"	APFA1 3948	551.
		60"	5"	40"	APFA1 3960	632.
		72"	5"	40"	APFA1 3972	779.
	48"H	48"	5"	49"	APFA1 4848	603.
		60"	5"	49"	APFA1 4860	691.
		72"	5"	49"	APFA1 4872	863.
	64"H	48"	5"	65"	APFA1 6448	719.
		60"	5"	65"	APFA1 6460	822.
		72"	5"	65"	APFA1 6472	1,029.

Order Code	Specification Information	Application Notes
Example: APF1 4860	Wall frame pattern numbers begin with APF prefix.	Service Wall frames are the structural component of a Currents spine. Specify frames in any combination of widths to create the overall wall length required.
APF1 Wall frame		
48 Height	<i>Specify:</i>	
60 Width	<i>Fifth position: height</i>	
	39 39"H	
	48 48"H	
	64 64"H	
	<i>Seventh position: width</i>	
	48 48"W	
	60 60"W	
	72 72"W	
	All wall frames include two 3" diameter, 2" levelling glides and one set of connectors to adjacent frame or wall connector. Frames are black painted finish.	Frames include vertical studs every 12" on center, with cover mounting clips and cable manager inserts on both sides. Frames also include 4"H or 1" top crown with continuous channel for add-up panels. 4"H Standard crown frames include shaped crowns for upmounting shelves and overhead storage cabinets or canopy lighting at any point. Compact crown frames feature a slim profile crown with downmounting capability only.
		Crown is bored to accept stackable add-up panels at 3" increments.
		Wall frames include two levelling feet with 2" travel, 12" from each side edge.
		The base of the wall accepts Knoll 2 + 2 or 3 + 3 raceway power rails, and allows cables to enter or exit anywhere between glides.
		Specify crown covers, raceway covers, structural base covers, and wall covers for each face of frame, and specify power components separately.

description	width	depth	height	pattern number	black
 Fence frames (legs not included)	48"	5"	20 1/2"	APF 1848	\$629.
	60"	5"	20 1/2"	APF 1860	754.
	72"	5"	20 1/2"	APF 1872	905.
 Leg with glide	2 3/4"	4"	18 1/2"	AX1LEG ()	96.
	2 3/4"	4"	5"	AX1LEG5 ()	96.
	2 3/4"	4"	6"	AX1LEG6 ()	96.
 Stabilizer feet (set of 2)	2 1/2"	7 1/2"	4 1/2"	AX1 FF ()	150.

Order Code	Specification Information	Application Notes
Example: APF 1872 APF Wall frame 18 Height 72 Width	<p><i>Specify painted finishes for legs and feet.</i></p> <p>Fence frames include four barrel connectors, crown and bottom rail covers in trim grey. Frames must be enclosed with two rows of 9"H Currents or AutoStrada wall covers on each face.</p> <p>Specify Currents power components separately. Outlet modules mount at any point along the top row only.</p> <p>Cable tray access covers mount in bottom row only.</p>	<p>Currents Fence provides independent services distribution to a cluster of tables, desks or workstations.</p> <p>Fence legs may be specified at three heights to deliver an overall height of 40"H, 28"H or 27"H to the top of the crown. Specify AX1LEG() leg to get to 40"H; specify AX1LEG6() leg to get to 28"H; and specify AX1LEG5() leg to get to 27"H to the top of the crown.</p> <p>Installed Fence frames include vertical studs with cover mounting clips and cable manager inserts every 12".</p> <p>A continuous top channel accepts Currents or AutoStrada crown top caps and supports frameless glass add up panels, add up panels or stackable add up panels 12" high. 21"H stackable add up panels may be used on Fence runs supported by perpendicular panels.</p> <p>Fence legs with glides mount 12" from each frame side edge under the first full vertical stud. Stabilizer feet mount on both faces of Fence legs. For freestanding Fence runs, specify a leg with feet 12" from each run end plus a leg with feet for each intermediate frame connection. Intermediate legs may be positioned on either side of the frame connection.</p> <p>Legs with feet 12" from each end of connected Fence frames can be replaced by stabilizer end cabinets or T-ends with panels. Intermediate support may also be provided by legs without feet in combination with perpendicular panels.</p> <p>Fence frames can end support worksurfaces but cannot cantilever worksurfaces or upmounted storage.</p> <p>When specifying frameless glass add-up panels on Fence, each Fence frame requires two legs.</p> <p>Fence T-end adaptors, stabilizer end cabinet adaptors, high-low straight connectors and universal panel starters are only compatible with Fence frames that are specified at 40 inch high with the 18- 1/2" high leg (AX1 LEG). To use these components when Fence is planned with shorter legs that deliver overall heights of 27 or 28 inches high, please contact Knoll Custom Product Development for assistance.</p>

description	type	w	d	h	pattern no.	paint	metal finish (A)	list
Crown covers (pair) 		48"	5"	4"	APT 48 ()	\$48.	\$57.	
		60"	5"	4"	APT 60 ()	57.	64.	
		72"	5"	4"	APT 72 ()	64.	81.	
Crown covers, compact (pair) integral color 		48"	5"	1"	APTA 48 ()			78.
		60"	5"	1"	APTA 60 ()			91.
		72"	5"	1"	APTA 72 ()			156.
Raceway covers (pair) 	no outlets	48"	—	3 1/3"	APR 480 ()	48.		
		60"	—	3 1/3"	APR 600 ()	57.		
		72"	—	3 1/3"	APR 720 ()	64.		
	outlets	48"	—	3 1/3"	APR 48 ()()	57.		
		60"	—	3 1/3"	APR 60 ()()	64.		
		72"	—	3 1/3"	APR 72 ()()	81.		
Crown top cap 		24"	2"	—	APT C24 ()			10.
		24"	2"	—	APT1 C24 ()			10.
		36"	2"	—	APT C36 ()			21.
		36"	2"	—	APT1 C36 ()			21.
		48"	2"	—	APT C48 ()			36.
		48"	2"	—	APT1 C48 ()			36.
		60"	2"	—	APT C60 ()			40.
		60"	2"	—	APT1 C60 ()			40.
		72"	2"	—	APT C72 ()			48.
		72"	2"	—	APT1 C72 ()			48.

integral color only, plastic


Order Code	Specification Information	Application Notes
Example: APR 480 612 APR Raceway 48 Width 0 Outlet openings 612 Finish	Wall crown pattern numbers begin with APT-prefix, then frame width. <i>Specify:</i> <i>Sixth position: paint or metal finish</i> Raceway Covers begin with APR-prefix, then frame width. <i>Specify:</i> <i>Sixth position: outlet openings</i> 0 no outlets 2 two outlets, each side (48", 60" only) 4 four outlets, each side 6 six outlets (72" only), each side <i>Seventh position:</i> Raceway cover finish	Crown, raceway, and structural base covers are required for every wall frame in corresponding widths. Covers are specified in pairs to cover both sides of a frame. Raceway covers may be specified with no openings (desk-height raceway), two openings in the center, or four outlets at all possible locations in 48" or 60"W raceway. 72"W raceway may have four outlet openings in the center or six in all, each side. Raceway cover sets with outlet openings include black filler plates for one cover only.

Structural base cover kits non-upholstered

Currents

Service Walls and
components

description	type	w	d	h	pattern no.	smooth solid	textured solid	perforated	textured perforated
Structural base covers (pair)	non upholstered	48"	1"	16"	APC AZ48 () ()	\$326.	\$362.	\$464.	\$508.
		60"	1"	16"	APC AZ60 () ()	375.	417.	530.	587.
		72"	1"	16"	APC AZ72 () ()	426.	471.	599.	659.




Order Code	Specification Information	Application Notes
Example: APC AZ48 H 612	Structural base cover kit pattern numbers begin with APC AZ prefix, then cover width.	<i>Specify paint finish for all covers.</i>
APC Wall cover		<i>Textured paint finishes for structural base covers only.</i>
AZ Attachment zone		Crown, raceway, and structural base covers are required for every wall frame in corresponding widths. Covers are specified in pairs to cover both sides of a frame.
48 Width		
H Perforated		
612 Finish		
	<i>Specify:</i> <i>Eighth position:</i> P painted PT textured painted H perforated painted HT textured perforated painted	Structural base covers bolt to each side of the wall frame up to 21"H for structure and continuous attachment capability.
	<i>Ninth position:</i> paint finish or fabric group	

Structural base cover kits *upholstered*

Currents

description	type	w	d	h	pattern no.	10	15	20	30	35	40	45	50	55
Structural base covers (pair)	upholstered	48"	1"	16"	APC AZ48 F ()	\$469.	\$489.	\$504.	\$538.	\$553.	\$574.	\$590.	\$620.	\$657.
		60"	1"	16"	APC AZ60 F ()	553.	574.	592.	632.	655.	670.	693.	727.	774.
		72"	1"	16"	APC AZ72 F ()	n/a	657.	n/a	n/a	n/a	n/a	n/a	n/a	n/a



Order Code	Specification Information	Application Notes
Example: APC AZ48 F 10	Structural base cover kit pattern numbers begin with APC AZ prefix, then cover width.	Crown, raceway, and structural base covers are required for every wall frame in corresponding widths. Covers are specified in pairs to cover both sides of a frame.
APC Wall cover	<i>Specify:</i>	
AZ Attachment zone	<i>Eighth position:</i>	
48 Width	F fabric	Structural base covers bolt to each side of the wall frame up to 21"H for structure and continuous attachment capability.
F Upholstered	<i>Ninth position:</i> paint finish or fabric group	
10 Fabric	<i>Fabric groups:</i> Specify two-digit fabric group number	When ordering 60" wide or greater width upholstered structural base covers, please check the width of the fabric selected.

Access covers


outlets cover

Currents

Service Walls and components

description	type	w	d	h	pattern no.	black	no finish	smooth
-------------	------	---	---	---	-------------	-------	-----------	--------


Outlets cover	9"H cover	12"	1"	9"	APC OC ()			\$40.
---------------	-----------	-----	----	----	-------------------	--	--	-------




Hinged outlet flap (each)					APC OCF			40.
---------------------------	--	--	--	--	----------------	--	--	-----

Outlet fillers (Set of 10)					AR OF		46.	
----------------------------	--	--	--	--	--------------	--	-----	--

Hardwire outlets cover		12"	9"		APC HOC ()			62.
------------------------	--	-----	----	--	--------------------	--	--	-----



Hardwire outlet box, desk height	quad	2"			AR1 HOB			280.
	two quad	12"			AR1 HOB2			369.






Order Code	Specification Information	Application Notes
Example: APC OC 612	<i>Specify finish.</i>	Locate outlets covers on Service Wall or Fence frames before specifying other wall covers.
APC Service wall cover		Outlets cover mounts between 21" and 30" (below standard desk height), 30" - 39" (above desk height) or 39" - 48" on Service Wall frame. Outlet cover mounts in top row of Fence only.
OC Outlets cover		Outlets cover is 12" wide, and mounts anywhere on Service Wall frame between 21" and 48" above the floor. Outlets cover corresponds to power components (specified separately) mounted on Service Wall frame.
612 Finish		Outlets covers have four openings for power or PDC outlets. Specify outlet fillers for unused outlet openings in cover. Specify hinged outlet flap to conceal power or data outlet plugs. Each flap covers two openings; two flaps conceal all four openings in outlets cover.
		For hardwire power applications (required in City of Chicago) specify hardwire outlets cover and hardwire outlets box. Do not specify cable tray covers at same level as hardwire power.
		Hardwire outlet box accepts two Decora-style duplex outlets, and includes mounting brackets for one face of Service Wall between 21" and 48"H or one face of top row of Fence frames. Two quad hardwire outlet box accepts four duplex outlets on one face. Also specify hardwire outlets cover, which has four outlet openings. Specify outlet fillers for any unused outlet openings.
		Outlet boxes include openings to permit continuous lay-in wiring with Wiremold® raceway. Electrical contractor supplies infeed cable, Wiremold 2400®, and duplex outlets. Outlet boxes can be planned back to back, with distribution on one side of Service Wall.
		NOTE: Currents cable tray access covers and all AutoStrada access covers cannot be used in the same 9"H zone as the wiremold raceway as the wiremold will not fit behind the covers.

Access covers

cable tray and slat wall covers

Currents

description	w	d	h	pattern no.	smooth
 9"H cable tray covers	12"	1"	9"	APC 0912 C ()	\$94.
	24"	1"	9"	APC 0924 C ()	112.
	36"	1"	9"	APC 0936 C ()	132.
	48"	1"	9"	APC 0948 C ()	171.
	60"	1"	9"	APC 0960 C ()	219.
	72"	1"	9"	APC 0972 C ()	268.
 9"H cable tray exit cover	12"	1"	9"	APC 0912 CX ()	190.
 9"H slat wall covers	12"	1"	9"	APC 0912 S ()	86.
	24"	1"	9"	APC 0924 S ()	98.
	36"	1"	9"	APC 0936 S ()	114.
	48"	1"	9"	APC 0948 S ()	151.
	60"	1"	9"	APC 0960 S ()	190.
	72"	1"	9"	APC 0972 S ()	230.

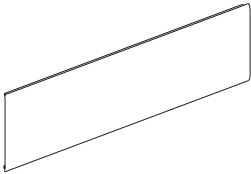
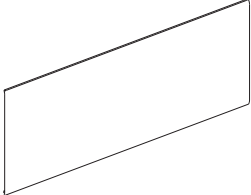
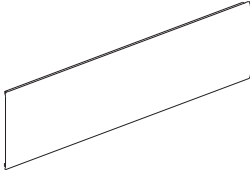
Order Code	Specification Information	Application Notes
Example: APC 0948 C 612 APC Service wall cover 09 Height 48 Width C Surface type 612 Finish	Specify finish.	<p>Cable tray and slat wall covers provide integral performance surface on one or both sides of a Service Wall or Fence frame. Cable tray and slat wall may be planned in combination with other painted or upholstered covers to enclose frames between 21"H and 48"H.</p> <p>Cable tray mounts from 21" - 30" only on any Service Wall frame. Adjacent trays form continuous, easily accessible cable management at worksurface or table height. Shorter segments provide local cable management below outlet modules. Covers may span across a straight wall frame connection.</p> <p>Bottom half of cable tray cover permits cables to be managed on surface of studs with one cable holder (55 CAT5 cables) or two clips (28 cables).</p> <p>Cable tray exit cover permits power jumpers and data/communication cables to pass from wall to Currents desk service beam. Cable tray exit cover, 12"W only, has two openings with sliding covers.</p> <p>Slat wall supports KnollExtra task lights, monitor arms, paper trays, file holders and other accessories.</p> <p>Slat wall covers will support flat panel monitor arms with varying weight limitations based on mounting and application. Please refer to the KnollExtra price list for comprehensive mounting and weight limitation information by application.</p>

Access covers

marker surface and painted steel covers

Currents

Service Walls and
components

description	type	w	d	h	pattern no.	M	smooth	textured
9"H Marker surface covers 		24"	1	9"	APC 0924 M	\$55.		
		36"	1	9"	APC 0936 M	65.		
		48"	1	9"	APC 0948 M	78.		
		60"	1	9"	APC 0960 M	87.		
		72"	1	9"	APC 0972 M	93.		
16"H Marker surface covers 		48"	1	16"	APC 1648 M	110.		
		60"	1	16"	APC 1660 M	132.		
		72"	1	16"	APC 1672 M	151.		
9"H Painted steel covers 	smooth	12"	1"	9"	APC 0912 P ()		44.	
		24"	1"	9"	APC 0924 P ()		51.	
		36"	1"	9"	APC 0936 P ()		56.	
		48"	1"	9"	APC 0948 P ()		72.	
		60"	1"	9"	APC 0960 P ()		79.	
		72"	1"	9"	APC 0972 P ()		89.	
	textured	12"	1"	9"	APC 0912 PT ()			46.
		24"	1"	9"	APC 0924 PT ()			55.
		36"	1"	9"	APC 0936 PT ()			65.
		48"	1"	9"	APC 0948 PT ()			78.
		60"	1"	9"	APC 0960 PT ()			87.
		72"	1"	9"	APC 0972 PT ()			93.


Order Code	Specification Information	Application Notes
Example: APC 0948 P 117 APC Service wall cover 09 Height 48 Width P Surface type 117 Finish	9"H covers plan at any 9"H level in 39", 48", or 64" Service Walls or Fence Frames. For active face of 39"H Service Wall frame, specify two 9"H covers each side. For active face of 48"H Service Wall frame, specify three 9"H covers each side. For active face of 64"H Service Wall frame, specify three 9"H covers and one 16"H cover each side. For active face of Fence frames, specify two 9" covers each side. <i>Surface type:</i> P Painted PT Textured painted M Marker <i>Specify smooth or textured painted finish for steel covers.</i>	Marker surface covers are steel with a bright white dry-erase marker finish. Painted steel covers provide a durable wall-like surface in smooth or textured finish. Service Wall covers enclose frames between 21"H and the top crown. Covers may be specified in any combination of widths corresponding to the total Service Wall length. Covers may span across a straight wall frame connection. For active surfaces with access to cables and power/data/communications outlets, specify 9" and 16"H segmented covers as described in Specification Information. Normally, 9" cover from 21" to 30" above floor is cable tray or painted steel, and higher covers are painted, marker, upholstered, tackable, or slat wall surfaces.

Access covers

marker surface and painted steel covers

Currents

description	type	w	d	h	pattern no.	M	smooth	textured
16"H Painted steel covers	smooth	48"	1"	16"	APC 1648 P ()		\$102.	
		60"	1"	16"	APC 1660 P ()		122.	
		72"	1"	16"	APC 1672 P ()		136.	
	textured	48"	1"	16"	APC 1648 PT ()			110.
		60"	1"	16"	APC 1660 PT ()			132.
		72"	1"	16"	APC 1672 PT ()			151.

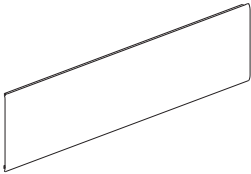
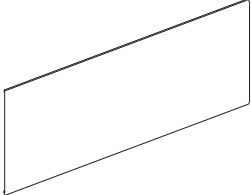


Order Code	Specification Information	Application Notes
Example: APC 0948 P 117	9"H covers plan at any 9"H level in 39", 48", or 64" Service Walls or Fence Frames.	Marker surface covers are steel with a bright white dry-erase marker finish.
APC Service wall cover		
09 Height		
48 Width	For active face of 39"H Service Wall frame, specify two 9"H covers each side.	Painted steel covers provide a durable wall-like surface in smooth or textured finish.
P Surface type	For active face of 48"H Service Wall frame, specify three 9"H covers each side.	Service Wall covers enclose frames between 21"H and the top crown. Covers may be specified in any combination of widths corresponding to the total Service Wall length. Covers may span across a straight wall frame connection.
117 Finish	For active face of 64"H Service Wall frame, specify three 9"H covers and one 16"H cover each side.	
	For active face of Fence frames, specify two 9" covers each side.	
	Surface type:	
	P Painted	
	PT Textured painted	
	M Marker	
	Specify smooth or textured painted finish for steel covers.	For active surfaces with access to cables and power/data/communications outlets, specify 9" and 16"H segmented covers as described in Specification Information. Normally, 9" cover from 21" to 30" above floor is cable tray or painted steel, and higher covers are painted, marker, upholstered, tackable, or slat wall surfaces.

Access covers upholstered

Currents

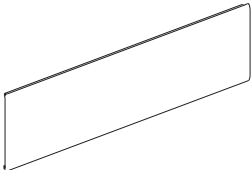
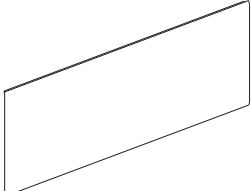
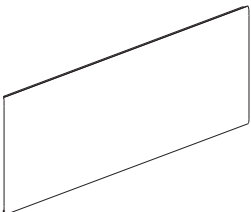
Service Walls and
components

description	w	d	h	pattern no.	10	15	20	30	40	45	50	55
9"H Wall covers 	12"	1"	9"	APC 0912 F ()	\$85.	\$85.	\$89.	\$92.	\$93.	\$94.	\$98.	\$105.
	24"	1"	9"	APC 0924 F ()	103.	105.	108.	112.	119.	123.	131.	137.
	36"	1"	9"	APC 0936 F ()	123.	129.	131.	138.	150.	154.	161.	172.
	48"	1"	9"	APC 0948 F ()	136.	138.	147.	161.	170.	174.	184.	194.
	60"	1"	9"	APC 0960 F ()	162.	170.	175.	192.	203.	216.	225.	234.
	72"	1"	9"	APC 0972 F ()	n/a	193.	n/a	n/a	n/a	n/a	n/a	n/a
16"H Wall covers 	36"	1"	16"	APC 1636 F ()	184.	192.	195.	210.	225.	230.	238.	253.
	48"	1"	16"	APC 1648 F ()	199.	216.	224.	238.	253.	266.	276.	291.
	60"	1"	16"	APC 1660 F ()	242.	253.	269.	285.	305.	316.	333.	357.
	72"	1"	16"	APC 1672 F ()	n/a	286.	n/a	n/a	n/a	n/a	n/a	n/a

Order Code	Specification Information	Application Notes
Example: APC 0948 F15		
APC Service wall cover	For active face of 39"H Service Wall frame, specify two 9"H covers.	Upholstered Service Wall covers enclose frame between 21" and the top crown.
09 Height	For active face of 48"H Service Wall frame, specify three 9"H covers.	Specify widths corresponding to wall frame width, or in any 12" increment to accommodate 12"W outlets covers or slat wall covers. Covers may span across a straight wall frame connection.
48 Width	For active face of 64"H Service Wall frame, specify three 9"H covers and one 16"H cover.	
F Surface type	For full fabric surface between 5" and 21", order upholstered structural base cover.	For active surfaces with access to cables and power/data/communications outlets, specify 9" and 16"H segmented covers as described in Specification Information. Normally, 9" cover from 21" to 30" above floor is cable tray or painted steel, and higher covers are painted, marker, upholstered, tackable, or slat wall surfaces.
15 Fabric group	For active face of Fence frames, specify two 9" covers each side.	When ordering 60" or wider covers, please check width of fabric specified.
	Surface type: F Upholstered	
	Specify fabric group:	
	10 Fabric group 10	
	15 Fabric group 15	
	20 Fabric group 20	
	30 Fabric group 30	
	40 Fabric group 40	
	50 Fabric group 50	
	55 Fabric group 55	

Access covers tackable upholstered

Currents

description	w	d	h	pattern no.	10	15	20	30	40	45	50	55
9"H Wall covers 	12"	1"	9"	APC 0912 A ()	\$162.	\$168.	\$171.	\$182.	\$194.	\$197.	\$205.	\$224.
	24"	1"	9"	APC 0924 A ()	162.	168.	171.	182.	194.	197.	205.	224.
	36"	1"	9"	APC 0936 A ()	162.	168.	171.	182.	194.	197.	205.	224.
	48"	1"	9"	APC 0948 A ()	174.	185.	192.	203.	220.	227.	239.	254.
	60"	1"	9"	APC 0960 A ()	208.	220.	230.	245.	269.	276.	288.	308.
	72"	1"	9"	APC 0972 A ()	n/a	249.	n/a	n/a	n/a	n/a	n/a	n/a
16"H Wall covers 	36"	1"	16"	APC 1636 A ()	239.	245.	256.	273.	287.	295.	312.	331.
	48"	1"	16"	APC 1648 A ()	268.	276.	286.	308.	331.	338.	361.	378.
	60"	1"	16"	APC 1660 A ()	316.	331.	345.	371.	399.	415.	429.	465.
	72"	1"	16"	APC 1672 A ()	n/a	373.	n/a	n/a	n/a	n/a	n/a	n/a
18"H Wall cover (replaces (2) 9"H) 	36"	1"	18"	APC 1836 A ()	285.	293.	303.	321.	336.	350.	366.	385.
	48"	1"	18"	APC 1848 A ()	360.	366.	377.	399.	419.	429.	450.	474.
	60"	1"	18"	APC 1860 A ()	425.	441.	454.	477.	506.	516.	531.	560.
	72"	1"	18"	APC 1872 A ()	n/a	496.	n/a	n/a	n/a	n/a	n/a	n/a

Order Code	Specification Information	Application Notes
Example: APC 0948 A20 APC Service wall cover 09 Height 48 Width A Surface type 20 Fabric group	<p>For active face of 39"H Service Wall frame, specify two 9"H covers. For passive face (along corridor or wall) specify one 18" cover.</p> <p>For active face of 48"H Service Wall frame, specify three 9"H covers or one 9"H and one 18"H cover. For passive face, specify 27"H cover.</p> <p>For active face of 64"H Service Wall frame, specify three 9"H covers and one 16"H cover or one 9"H, one 18"H, and one 16"H cover. For passive face, specify one 27" and one 16"H cover.</p> <p>For full fabric surface between 5" and 21", order upholstered structural base cover.</p> <p>For active face of Fence frames, specify two 9" covers each side. For passive face, specify one 18" cover.</p> <p><i>Surface type:</i> A tackable upholstered</p> <p><i>Specify fabric group:</i> 10 Fabric group 10 15 Fabric group 15 20 Fabric group 20 30 Fabric group 30 40 Fabric group 40 50 Fabric group 50 55 Fabric group 55 </p>	<p>Tackable upholstered Service Wall covers enclose wall frames between 21" and the top crown. Covers incorporate a tackable, acoustical core in the same outward profile as other upholstered covers.</p> <p>Specify widths corresponding to wall frame width, or in any 12" increment to accommodate 12"W outlets covers or slat wall covers. Covers may span across a straight wall frame connection.</p> <p>For active surfaces with access to cables and power/data/communications outlets, specify 9" and 16"H segmented covers as described in Specification Information. Normally, 9" cover from 21" to 30" above floor is cable tray or painted steel, and higher covers are painted, marker, upholstered, tackable, or slat wall surfaces.</p> <p>For passive Service Wall surfaces (corridors or conference areas) specify 18"H or 27"H covers in place of two or three 9"H covers.</p> <p>18"H covers may also be specified above 9"H covers including outlets covers below desk height on 48" or 64"H Service Walls.</p> <p>Service Wall with upholstered tackable covers has been tested to NRC .40 and STC 22.</p> <p>When ordering 60" or wider covers, please check width of fabric specified.</p>

Access covers tackable upholstered

Currents

Service Walls and
components






description	w	d	h	pattern no.	10	15	20	30	40	45	50	55
27"H Wall cover (replaces (3) 9"H)	36"	1"	27	APC 2736 A ()	\$425.	\$441.	\$454.	\$477.	\$506.	\$516.	\$531.	\$560.
	48"	1"	27"	APC 2748 A ()	534.	552.	563.	594.	621.	639.	660.	689.
	60"	1"	27"	APC 2760 A ()	647.	660.	667.	710.	742.	759.	779.	807.
	72"	1"	27"	APC 2772 A ()	n/a	751.	n/a	n/a	n/a	n/a	n/a	n/a

Order Code	Specification Information	Application Notes
Example: APC 0948 A20		
APC Service wall cover	For active face of 39"H Service Wall frame, specify two 9"H covers. For passive face (along corridor or wall) specify one 18" cover.	Tackable upholstered Service Wall covers enclose wall frames between 21" and the top crown. Covers incorporate a tackable, acoustical core in the same outward profile as other upholstered covers.
09 Height		
48 Width	For active face of 48"H Service Wall frame, specify three 9"H covers or one 9"H and one 18"H cover. For passive face, specify 27"H cover.	Specify widths corresponding to wall frame width, or in any 12" increment to accommodate 12"W outlets covers or slat wall covers. Covers may span across a straight wall frame connection.
A Surface type	For active face of 64"H Service Wall frame, specify three 9"H covers and one 16"H cover or one 9"H, one 18"H, and one 16"H cover. For passive face, specify one 27" and one 16"H cover.	For active surfaces with access to cables and power/data/communications outlets, specify 9" and 16"H segmented covers as described in Specification Information. Normally, 9" cover from 21" to 30" above floor is cable tray or painted steel, and higher covers are painted, marker, upholstered, tackable, or slat wall surfaces.
20 Fabric group	For full fabric surface between 5" and 21", order upholstered structural base cover.	
	For active face of Fence frames, specify two 9" covers each side. For passive face, specify one 18" cover.	
	Surface type: A tackable upholstered	
	Specify fabric group: 10 Fabric group 10 15 Fabric group 15 20 Fabric group 20 30 Fabric group 30 40 Fabric group 40 50 Fabric group 50 55 Fabric group 55	
		For passive Service Wall surfaces (corridors or conference areas) specify 18"H or 27"H covers in place of two or three 9"H covers. 18"H covers may also be specified above 9"H covers including outlets covers below desk height on 48" or 64"H Service Walls. Service Wall with upholstered tackable covers has been tested to NRC .40 and STC 22. When ordering 60" or wider covers, please check width of fabric specified.

Wall ends and connectors

90° and 120° spine connectors

Currents

description	w	d	h	pattern no.	paint
 L connector, 90°	6"	6"	39"	AX1 L39 () ()	\$488.
	6"	6"	48"	AX1 L48 () ()	586.
	6"	6"	64"	AX1 L64 () ()	685.
 T connector, 90°	6"	7"	39"	AX1 T39 () ()	488.
	6"	7"	48"	AX1 T48 () ()	586.
	6"	7"	64"	AX1 T64 () ()	685.
 X connector, 90°	7"	7"	39"	AX1 X39 () ()	488.
	7"	7"	48"	AX1 X48 () ()	531.
	7"	7"	64"	AX1 X64 () ()	586.
 V connector, 120°	5 1/2"	5 1/2"	39"	AX1 V39 () ()	488.
	5 1/2"	5 1/2"	48"	AX1 V48 () ()	586.
	5 1/2"	5 1/2"	64"	AX1 V64 () ()	685.
 Y connector, 120°	6 1/2"	5 1/2"	39"	AX1 Y39 () ()	488.
	6 1/2"	5 1/2"	48"	AX1 Y48 () ()	586.
	6 1/2"	5 1/2"	64"	AX1 Y64 () ()	685.

Order Code

Example:	AX1 L39 612 612
AX1	Currents connector
L	Type
39	Height
612	Trim/raceway cover finish
612	Top/end cap finish

Specification Information

For L, T, V, Y connectors specify:

Seventh position:
painted finish for vertical trim cover and raceway cover

Eighth position, and X connectors:
painted finish for top cap and crown end caps

Specify painted finishes for connector trim covers and crown end caps.

When ordering connectors for the Service Wall with 1"H compact crown, specify compact crown end caps separately.

Application Notes

L, T, and X connectors join Currents Service Wall frames at 90° angles and include vertical trim covers, top cap and standard crown end caps, and one spare set of straight connectors.


V and Y connectors join Currents Service Wall frames at 120° angles and include vertical trim covers, top cap and standard crown end cap.

Wall ends and connectors

other ends and connectors

Currents

Service Walls and
components



description	type	w	d	h	pattern no.	paint	list price
 Outrigger	deep	3"	15"	21"	AA1ORD()	\$231.	
	standard	3"	8"	21"	AA1OR()	168.	
High low straight connector	48 - 39"	–	5"	48"	AX1 HLS4839 () ()	266.	
	64 - 39"	–	5"	64"	AX1 HLS6439 () ()	450.	
	64 - 48"	–	5"	64"	AX1 HLS6448 () ()	303.	
Service Wall starter	39"	1"	2"	39"	AX1 SWS39 ()	150.	
	48"	1"	2"	48"	AX1 SWS48 ()	168.	
	64"	1"	2"	64"	AX1 SWS64 ()	193.	
Straight connector kit (replacement)		–	–	–	AX1 S	32.	

Order Code	Specification Information	Application Notes
Example: AX1 HLS4839 612 612	Specify painted finishes for outrigger, high low straight connector and Service Wall starter.	Outrigger connects to structural base cover at any point. Outriggers (or perpendicular systems panels) are required every 8' and adjacent to flat end for adequate support. Specify deep outriggers when cantilevering 24"D worksurfaces without adjacent perpendicular systems panels or Service Wall connectors. Standard outrigger should be specified when desks with service beam are positioned along Service Wall.
AX1 Currents connector		
HLS Type		
4839 Height		
612 Vertical cover finish		
612 Crown end finish		High-low straight connectors join Service Wall of different heights in a straight line. Service Wall starter connects Service Wall to building wall. Straight connector is replacement hardware kit to join Currents Wall frames of the same height end to end. Kit includes four barrel-shape connectors and hardware.

Wall ends and connectors

flat ends and crown end caps

Currents

description	type	d	h	pattern no.	paint	list price
 Flat end		5"	39"	AX1 F39 () ()	\$155.	
		5"	48"	AX1 F48 () ()	174.	
		5"	64"	AX1 F64 () ()	196.	
Crown end cap				APT ()		5.
 Crown end cap compact	Kit of 1			APTA CC1 ()		17.
	Kit of 10			APTA CC ()		157.

Order Code	Specification Information	Application Notes
Example: AX1 F48	<i>For flat ends specify:</i>	Flat end finishes end of corresponding height Service Wall when end of Service Wall is supported by outriggers.
AX1 Currents connector	<i>Seventh position:</i>	
F Flat End	<i>painted finish for outside trim cover and raceway cover</i>	
48 Height	<i>Eighth position:</i>	
612 Vertical cover finish	<i>painted finish for crown end cap</i>	
612 Crown end finish	When specifying a flat end for a Service Wall frame with the 1 inch compact crown, compact crown end caps must be ordered separately.	
	Specify painted finish for standard crown end cap.	
	Specify trim grey or easy grey integral color for compact crown end cap.	






Wall ends and connectors

Fence ends and connectors

connectors

Currents

Service Walls and
components

description	w	d	h	pattern no.	list price
L connector, 90 degrees	6"	6"	19"	AX1 L18 ()	\$490.
					
T connector, 90 degrees	6"	7"	19"	AX1 T18 ()	499.
					
X connector, 90 degrees	7"	7"	19"	AX1 X18	429.
					
V connector, 120 degrees	5 1/2"	5 1/2"	19"	AX1 V18 ()	469.
					
Y connector, 120 degrees	6 1/2"	5 1/2"	19"	AX1 Y18 ()	215.
					

Order Code	Specification Notes	Application Notes	
Example: AX1 L 18 613	<i>Specify painted finishes for connector trim covers.</i>	L, T and X connectors join Fence frames at 90° angles and include vertical trim covers, top cap and crown end caps and one set of straight connectors.	Flat end finishes end of Fence frames and includes crown end detail.
AX1 Fence connector			
L Type	For L, T, V and Y connectors specify finish for vertical trim.		
18 Height			
613 Trim finish	All top caps and crown covers are trim grey. Specify finish for outside trim of flat end.	Y and V connectors join Fence frames at 120° angles.	Specify AX1 F18 () for use with sloped crown covers. Specify AX1A F18L () for use with AutoStrada flat, low profile crown covers. Specify AX1A F18H () for use with AutoStrada flat, high profile crown covers.

Wall ends and connectors
Fence ends and connectors
connectors

Currents

description	w	d	h	pattern no.	list price
Flat end for use with sloped crown covers	–	5"	21"	AX1 F18 ()	\$188.



Flat end for use with flat crown covers	–	5"	21"	AX1A F18H ()	188.
	–	5"	21"	AX1A F18L ()	188.



Order Code	Specification Notes	Application Notes	
Example: AX1 L 18 613	<i>Specify painted finishes for connector trim covers.</i>	L, T and X connectors join Fence frames at 90° angles and include vertical trim covers, top cap and crown end caps and one set of straight connectors.	Flat end finishes end of Fence frames and includes crown end detail.
AX1 Fence connector	For L, T, V and Y connectors specify finish for vertical trim.	Y and V connectors join Fence frames at 120° angles.	Specify AX1 F18 () for use with sloped crown covers. Specify AX1A F18L () for use with AutoStrada flat, low profile crown covers. Specify AX1A F18H () for use with AutoStrada flat, high profile crown covers.
L Type			
18 Height			
613 Trim finish	All top caps and crown covers are trim grey. Specify finish for outside trim of flat end.		







Wall ends and connectors

Fence ends and connectors

other hardware

Currents

Service Walls and
components

description	type	w	d	h	pattern no.	list price
T-end adapter 	0" or 1 1/8" extension	1 3/8"	2 1/8"	2 3/8"	AX1 AK1 ()	\$32.
						
T-end and stabilizer end cabinet adapter 	3 1/2" extension	4"	5"	16 1/2"	AX1 AK3 ()	112.
						
Flat wall starter 	48"H service wall		3 1/4"	27"	AX1 FWS 48	96.
	64"H service wall		3 1/4"	43"	AX1 FWS 64	106.
	Fence and 39"H wall		3 1/4"	18"	AX1 FWS 39	89.
High-low straight connector 	48"H wall - Fence				AX1 FHLS4818 ()	553.

Order Code	Specification Information	Application Notes
Example: AX1 FWS 39	<i>Specify painted finishes for T-end adapter kits.</i>	Standard 39"H fence accepts Currents T-ends for 39" Service Wall.
AX1 Fence end	Flat wall starter is black only.	Specify AX1 AK1 adapter kit to complete bottom trim and crown end of T-ends with 0" or 1 1/8" extension.
FWS Type	Crown end covers are trim grey.	Specify AX1 AK3 adapter kit to complete bottom trim and crown end of T-ends with 3" extension.
39 Height		Flat wall starter connects Fence frames and Service Wall to building wall.
		High-low Fence connector joins standard 39"H Fence and 48"H Currents Service Wall.
		Fence T-ends adaptors, stabilizer end cabinet adaptors, high-low straight connectors and universal panel starters are only compatible with Fence frames that are specified at 40 inches high with the 18- 1/2" high leg (AX1 LEG). To use these components when Fence is planned with shorter legs that deliver overall heights of 27 or 28 inches high, please contact Knoll Custom Product Development for assistance.

Wall frame

description	type	w	d	h	pattern no.	list price
Acoustical inserts	39"H	12"	2"	34"	APA 39	\$40.
	48"H	12"	2"	43"	APA 48	47.
	64"H	12"	2"	59"	APA 64	63.

Order Code**Specification Information****Application Notes**Example: **APT 612****APT** Service wall trim**612** Painted finish


Acoustical inserts fit between studs in Service Wall frame to increase control of sound transmission. Inserts are bagged in heights corresponding to wall frame. Specify four inserts for 48"W Service Wall frame, five for 60"W Service Wall frame, and six for 72"W Service Wall frame. Service Walls with acoustical inserts have been tested to STC 33.


Wall frame accessories

Fence frame

Currents

Service Walls and
components

description	type	w	d	h	pattern no.	list price
 Wire manager cover (set of 2)		3 1/2"	3"	18 3/8"	AR1VCM	\$82.
		3 1/2"	3"	5"	AR1VCM5	82.
		3 1/2"	3"	6"	AR1VCM6	82.
Carpet grips (set of 10)					AA1CG	17.
Non-skid pads (set of 10)					AA1NSK	46.
Hardwire fence infeed (NYC)	2 + 2				AR1 EPHF	656.
	3 + 3				AR1 TPHF	697.
Fence to desk brackets	27"h Fence				AA1FDB27()	94.
	28"h Fence				AA1FDB28()	94.
Fence end bracket kit					AB1FAE ()	256.



Order Code	Specification Information	Application Notes
Example AR1 VCM AR1 Raceway VCM Type	Wire manager covers are integral color trim grey.	<p>Wire manager covers snap into the sides of the Fence legs to guide cables from the floor to the underside of the frame.</p> <p>Carpet grips and/or non-skid pads snap onto bottom of stabilizer feet to prevent legs from sliding.</p> <p>Hardwire fence infeed is approved for City of New York installation. Infeed includes wire manager cover, junction box and connector to desk height outlet module.</p> <p>Fence to desk brackets connect Fence frames to freestanding tables to stabilize Fence. Fence to desk brackets are specified as an alternative to stabilizer feet as a means of stabilizing freestanding Fence runs.</p>
		<p>Fence to desk brackets are only compatible with Fence frames specified with shorter Fence legs (AX1LEG5, AX1LEG6) where the total height of Fence is 27" or 28" to the top of the crown.</p> <p>Fence to desk brackets may not be specified as a means of end supporting worksurfaces. Fence to desk brackets may only be specified for use with freestanding tables.</p> <p>Fence end brackets attach to the Currents Fence to support one end of rectilinear or one back edge of a corner worksurface when the other ends are properly supported by legs, storage or panel brackets. Refer to the specific worksurface Application Notes for support requirements.</p> <p>Fence end brackets support the underside of the worksurface in 1" increments from 26" to 28" (27" to 29" top height).</p>

Spine end connectors for Dividends Horizon panels and screens

description	application	h	w	d	pattern no.	list
Spine end connector	36"h panel/39"h spine	39"	5"	1/2"	AX1SED3939 () () ()	\$320.
	36"h-42"h panel/ 48"h spine	48"	5"	1/2"	AX1SED4848 () () ()	335.
	36"h-64"h panel/ 64"h spine	64"	5"	1/2"	AX1SED6464 () () ()	400.
	42"h panel/ 39"h spine + 1" crown	42"	5"	1/2"	AX1SED4239 () ()	320.
	42"h panel/ 39"h spine + 4" crown	43"	5"	1/2"	AX1SED4339C () ()	320.
	50"h panel/ 39"h spine	50"	5"	1/2"	AX1SED5039 () ()	335.
	50"h panel/ 48"h spine + 1" crown	50"	5"	1/2"	AX1SED5048 () ()	353.
	50"h panel/ 48"h spine + 4" crown	52"	5"	1/2"	AX1SED5248C () ()	335.
	57"h panel/ 39"h spine	57"	5"	1/2"	AX1SED5739 () ()	385.
	57"h panel/ 48"h spine	57"	5"	1/2"	AX1SED5748 () ()	385.
	64"h panel/ 39"h spine	64"	5"	1/2"	AX1SED6439 () ()	400.
	64"h panel/ 48"h spine	64"	5"	1/2"	AX1SED6448 () ()	400.
	78"h panel/ 48"h spine	78"	5"	1/2"	AX1SED7848 () ()	610.
	78"h panel/ 64"h spine	78"	5"	1/2"	AX1SED7864 () ()	583.

Order Code	Specification Information	Application Notes	
Example: AX1 SED 6448 613 812			
AX1 Spine connector	For spine end connectors with panel lower than spine specify crown type and finish for crown end cap.	Spine end connectors are complete end cover and trim for an AutoStrada or Currents spine. Side edges of spine end connectors accept end starters for Dividends Horizon panels and screens.	When attached panel/screen is between the nominal height of the spine and the top of the Currents 4" crown, spine end connector must cover the entire height of the spine with crown.
SED Type	1. Crown type: C=Currents standard 4"h L=low profile flat 1"h H=high profile flat 1 1/4"h F=compact 1"h	In most cases spine end connectors match the height of the attached Dividends Horizon panel/screen. When attached panel/screen is lower than the spine, the spine end connector is as high as the nominal height of the spine and the crown requires an end cap.	Spine end connectors include painted aluminum outside cover with flat top cap and inside cover (where applicable) over the end of the spine.
64 Panel height	2. All crown end caps are available in all painted finishes.		
48 Spine height	For all spine end connectors specify vertical cover and top trim finish:		Inside base trim for Currents raceway is recommended to finish inside when combined with standard Currents recessed base raceway covers. Base trim is not required with AutoStrada spine base covers.
613 Vertical cover finish	3. Vertical cover finish: All standard paint finishes	Specify low profile flat metal crown covers to align with a 50"h Dividends Horizon panel/screen.	
812 Top cap finish	4. Top cap for vertical cover: 812=Easy Grey 813=Trim Grey And all standard painted finishes		

End connectors on this page begin 1/2" above floor.

3 1/2" spine extender kit for use with ceiling infeed or panels

description	application	h	w	d	pattern no.	list
Spine extender kit for use with Currents Spine	39"h spine	39"	5"	4"	AX1SX39 C (L/C/P)()()	\$641.
	48"h spine	48"	5"	4"	AX1SX48 C (L/C/P)()()	663.
	64"h spine	64"	5"	4"	AX1SX64 C (L/C/P)()()	783.
Spine extender kit for use with AutoStrada Spine	39"h spine	39"	5"	4"	AX1SX39 A (L/C/P)()()	802.
	48"h spine	48"	5"	4"	AX1SX48 A (L/C/P)()()	822.
	64"h spine	64"	5"	4"	AX1SX64 A (L/C/P)()()	953.

Order Code	Specification Information	Application Notes
Example: AX1 SX 48 AL 613 613	For all 3 1/2" spine extenders specify spine base type:	Spine extenders include brackets, side and top trim covers between the end of a spine and any spine end connector to add 3 1/2" to the length of a spine.
AX1 Spine connector	A AutoStrada	Spine end connector must be specified separately to finish off face of spine extender.
SX Type	C Currents	
48 Spine height	Then specify crown end type.	Spine extender dimension matches that of the Currents 3 1/2"x 5" ceiling infeed panel which may be added between nominal spine height and ceiling for connection to building power, data and communications supply.
A Spine type	L=Flat low/high profile metal crown end cap	
L Crown end type	C=Standard and compact sloped end cap	This extension can also make up for the dimensional gain of one Dividends Horizon panel or screen in the middle of a cluster of workstations.
613 Top cap finish	P=Power Pole	
613 Cover finish	Then specify finish for vertical trim covers, all standard painted finishes.	In most cases the spine end connector matches the height of the attached Dividends Horizon panel or screen, but the extending area is only as high as the nominal height of the spine (bottom of crown) so the crown always requires an end cap.
613 Base trim finish	Then specify base cover finish. AutoStrada spine base covers are clear anodized aluminum (AA) or painted finish excluding silver. Currents spine raceway covers are available in any painted finish only.	
	Then specify top cap finish (if applicable).	When attached panel or screen is lower than the spine, the spine end connector should be the same height as the nominal height of the spine.

To attach Dividends Horizon panels and screens to spine end connector

description	application	h	w	d	pattern no.	list
End starters for Dividends Horizon panels and screens	36"h panel, flush, left end of Service Wall	36"	1"	3"	AX1DHES3600L(5)()	\$253.
	36"h panel, flush, right end of Service Wall	36"	1"	3"	AX1DHES3600R(5)()	253.
	36"h panel, offset 1 panel thickness, left end of Service Wall	36"	1"	3"	AX1DHES3603L(5)()	253.
	36"h panel, offset 1 panel thickness, right end of Service Wall	36"	1"	3"	AX1DHES3603R(5)()	253.
	42"h panel, flush, left end of Service Wall	42"	1"	3"	AX1DHES4200L(5)()	253.
	42"h panel, flush, right end of Service Wall	42"	1"	3"	AX1DHES4200R(5)()	253.
	42"h panel, offset 1 panel thickness, left end of Service Wall	42"	1"	3"	AX1DHES4203L(5)()	253.
	42"h panel, offset 1 panel thickness, right end of Service Wall	42"	1"	3"	AX1DHES4203R(5)()	253.
	50"h panel, flush, left end of Service Wall	50"	1"	3"	AX1DHES5000L(5)()	253.
	50"h panel, flush, right end of Service Wall	50"	1"	3"	AX1DHES5000R(5)()	253.
	50"h panel, offset 1 panel thickness, left end of Service Wall	50"	1"	3"	AX1DHES5003L(5)()	253.
	50"h panel, offset 1 panel thickness, right end of Service Wall	50"	1"	3"	AX1DHES5003R(5)()	253.
	57"h panel, flush, left end of Service Wall	57"	1"	3"	AX1DHES5700L(5)()	253.
	57"h panel, flush, right end of Service Wall	57"	1"	3"	AX1DHES5700R(5)()	253.
	57"h panel, offset 1 panel thickness, left end of Service Wall	57"	1"	3"	AX1DHES5703L(5)()	253.
	57"h panel, offset 1 panel thickness, right end of Service Wall	57"	1"	3"	AX1DHES5703R(5)()	253.
	64"h panel, flush, left end of Service Wall	64"	1"	3"	AX1DHES6400L(5)()	253.
	64"h panel, flush, right end of Service Wall	64"	1"	3"	AX1DHES6400R(5)()	253.
	64"h panel, offset 1 panel thickness, left end of Service Wall	64"	1"	3"	AX1DHES6403L(5)()	253.
	64"h panel, offset 1 panel thickness, right end of Service Wall	64"	1"	3"	AX1DHES6403R(5)()	253.


Order Code	Specification Information	Application Notes
Example: AX1 DHES 36 00 L (5)		
AX1 Spine connector	1.Offset 00=Flush 03=Offset 1 panel thickness	End starters connect a Dividends Horizon panel or screen to either side of a same height or taller spine end connector. End starters for Dividends Horizon panels and screens include specified end top cap.
DH Dividends Horizon		
ES End starter	2.Top cap type 5=Metal flat	End starters may be positioned in either of two configurations: flush with end of spine or offset one panel thickness beyond end of spine. For full access to entire width of spine surface, position end starters offset one panel thickness.
36 Panel height		
00 Offset	3.Paint finish All standard paint finishes	<p>For a single workstation (0 intermediate panels), specify 2 spine end connectors and 2 end starters positioned offset by 1 panel thickness.</p> <p>For a cluster of 2 workstations (1 intermediate panel), specify 1 panel starter, 2 spine end connectors, 1 spine extender, and 2 end starters positioned offset by 1 panel thickness.</p> <p>For a cluster of 3 workstations, (2 intermediate panels), extend the spine another 12", specify 2 panel starters, 2 spine end connectors, and 2 end starters positioned flush.</p> <p>For a cluster of 4 workstations (3 intermediate panels), extend the spine 12" and specify 3 panel starters, 2 spine end connectors, and 2 end starters (1 end starter flush and the other offset by 1 panel thickness).</p> <p>For a cluster of 5 workstations (4 intermediate panels) extend the spine by 12" and specify 4 panel starters, 2 spine end connectors, and 2 end starters positioned offset by 1 panel thickness.</p>
5 Top cap type		
613 Painted finish		


Panel system starters and T-ends

Reff panel starters and T-ends


Currents

Service Walls and
components

description	type	pattern no.	price	0" or 1 1/8" extension	3 1/2" extension
Reff panel starter 	34"H (includes AA1RTC bracket)	AA1RPS34 () () ()	\$171.		
	42"H (includes AA1RTC bracket)	AA1RPS42 () () ()	299.		
	49"H (includes AA1RTC bracket)	AA1RPS49 () () ()	307.		
	64"H (includes AA1RTC bracket)	AA1RPS64 () () ()	326.		
	79"H (includes AA1RTC bracket)	AA1RPS79 () () ()	338.		

T-end frame for Reff panels 	42" Reff panel to 39" Currents	AX1 R34239 () ()		1,225.	1,352.
	49" Reff panel to 39" Currents	AX1 R34939 () ()		1,237.	1,364.
	49" Reff panel to 48" Currents	AX1 R34948 () ()		1,161.	1,281.
	64" Reff panel to 39" Currents	AX1 R36439 () ()		1,369.	1,492.
	64" Reff panel to 48" Currents	AX1 R36448 () ()		1,288.	1,413.
	64" Reff panel to 64" Currents	AX1 R36464 () ()		1,264.	1,387.
	79" Reff panel to 39" Currents	AX1 R37939 () ()		1,380.	1,505.
	79" Reff panel to 48" Currents	AX1 R37948 () ()		1,298.	1,420.
	79" Reff panel to 64" Currents	AX1 R37964 () ()		1,257.	1,380.

Top clip (replacement part)	AA1RTC ()	122.
-----------------------------	-------------------	------





Order Code	Specification Information	Application Notes
Example: AA1-RPS64 48 A 613	<i>For T-end specify extension at end of spine, then paint finish. Extension at end of Service Wall:</i>	Panel starters attach perpendicular Reff panels to Service Wall. Panel starter includes clamp bracket to structural base cover, top clip, vertical extrusion corresponding to Reff panel height and top trim for adjoining panel.
AA1 Accessory	0 0" extension	Specify two 0" T-ends for a single workstation on each side (no intermediate panels).
R Reff	1 1 1/8" extension	Specify two 1 1/8" T-ends for one intermediate panel, one 1 1/8" and one 3 1/2" for two panels, and two 3 1/2" for three intermediate panels.
PS Panel starter	3 3 1/2" extensions	T-ends with 3 1/2" extension have removable inside covers and accept ceiling infeed panel.
64 Panel height	<i>Specify following for panel starter:</i>	Only Reff finishes are available for AA1RTC() top clip.
48 Adjoining panel width	1 Adjoining panel width	
A Panel top trim profile	2 Top trim profile of adjoining panel	
613 Finish, panel starter	3 Painted finish for panel starter	
613 Panel top trim finish	4 Top trim finish	
	In addition to Currents finishes, all standard Reff system painted finishes are available.	Specify Reff straight connector separately to attach panel.
	When ordering T-ends for the Service Wall, specify crown end caps separately.	Specify Reff end connector to finish side edge without a connected wall.
		Specify T-end with 0", 1 1/8", or 3 1/2" of extension to accommodate the "creep" of panels between workstations on each side of Service Wall.

Panel system starters and T-ends

Reff T-end fabric and wood cover sets

Currents

description	type	height	pattern no.	list price
 Monolithic cover set	Fabric	42"	R3B0P0F4207	\$189.
		49"	R3B0P0F4907	214.
		64"	R3B0P0F6407	251.
		79"	R3B0P0F7907	289.
	Wood	42"	R3B0P0H4207	193.
		49"	R3B0P0H4907	219.
		64"	R3B0P0H6407	258.
		79"	R3B0P0H7907	294.
 Tiled cover set	Fabric	42"	R3B0T0F4207	189.
		49"	R3B0T0F4907	214.
		64"	R3B0T0F6407	251.
		79"	R3B0T0F7907	289.
	Wood	42"	R3B0T0H4207	193.
		49"	R3B0T0H4907	219.
		64"	R3B0T0H6407	258.
		79"	R3B0T0H7907	294.




Order Code	Specification Information	Application Notes
Example: R3B0P0F4207	See Reff System for full selection of painted finishes, fabrics and wood veneers for T-end cover sets.	Specify covers in monolithic or tiled sets to complete T-end frames for Reff.
R3B Reff		
0P0F Monolithic		
42 Panel height		
07 Width		
	<p><i>Specify:</i></p> <ol style="list-style-type: none"> 1. Top trim profile 2. Panel finishes 3. Top trim finish 4. Base finish <p><i>Top trim profile:</i></p> <p>A Flat</p> <p>B Square</p> <p>C Bullnose</p> <p><i>Base height:</i></p> <p>4 4" base height</p> <p>6" base height is currently not available.</p>	<p>When ordering T-ends for the Service Wall, specify crown end caps separately.</p> <p>Monolithic cover sets include a raceway cover and a single snap-in panel above.</p> <p>Tiled sets include raceway cover and segmented tiles corresponding to adjacent Reff tiled panels.</p> <p>Reff tiled module horizontal reveals are at nominal 19", 34", 49" and 64" above the floor and do not align with service wall cover reveals.</p>

Panel system starters and T-ends

Universal panel starters and T-ends

Currents

Service Walls and
components



description	w	d	h	pattern no.	paint
 Universal T-end adapter	2-6"	7"	39"	AA1UA39()	\$106.
	2-6"	7"	48"	AA1UA48()	129.
	2-6"	7"	64"	AA1UA64()	141.
 Universal panel starters	3"	1"	39"	AA1UPS39()	239.
	3"	1"	48"	AA1UPS48()	256.
	3"	1"	64"	AA1UPS64()	274.
 Universal top clip				AA2 UTC ()	103.

Order Code	Specification Information	Application Notes
Example: AA1 UPS48 612 AA1 Accessory UPS Panel starter 48 Panel height 612 Finish	<i>Specify paint finishes for Universal end and panel starter.</i>	<p>Universal adapters and starters integrate other panel systems with the Service Wall. Vertical surface accepts architectural wall starter of most other systems.</p> <p>T-end adapters include connector to corresponding height T-end for Currents screen (specified separately).</p> <p>Panel starter includes clamp bracket to structural base cover on Service Wall.</p> <p>Top clip gives added stability to attached panels of the same height or higher than the Service Wall.</p>

Panel system starters and T-ends

Fence panel starters

Currents

description	type	w	d	h	pattern no.	list price
Universal panel starter		3"	1"	35"	AA1FUPS39()	\$154.
						
Universal top clip					AA2 UTC ()	103.
						

Order Code	Specification Information	Application Notes
	<i>Specify paint finish for panel starters and top clip.</i>	<p>Panel starters attach perpendicular panels to the Fence bottom rail.</p> <p>Panel starters include clamp bracket and full height connector track with modified top wedge block.</p> <p>Top clip connects panel connector track with the Fence or Service Wall crown. Specify top clip for added stiffness of panels higher than 48" or whenever cantilevering components from panel.</p> <p>Top clip is not compatible with end trim.</p>
		<p>Universal panel starters integrate other panel systems with Fence. Vertical surface accepts architectural wall starters of most other systems.</p> <p>Fence T-ends adaptors, stabilizer end cabinet adaptors, high-low straight connectors and universal panel starters are only compatible with Fence frames that are specified at 40 inches high with the 18- 1/2" high leg (AX1 LEG). To use these components when Fence is planned with shorter legs that deliver overall heights of 27 or 28 inches high, please contact Knoll Custom Product Development for assistance.</p>

Panel system starters for Dividends Horizon

Dividends Horizon panel and screen starters

Currents

Service Walls and components


description	application	h	w	d	pattern no.	list
Service Wall starters for Dividends Horizon panels and screens	36" high Dividends Horizon Panel or Screen	36"	1"	3"	AA1DHPS36(5)()	\$416.
	42" high Dividends Horizon Panel or Screen	42"	1"	3"	AA1DHPS42(5)()	416.
	50" high Dividends Horizon Panel or Screen	50"	1"	3"	AA1DHPS50(5)()	416.
	57" high Dividends Horizon Panel or Screen	57"	1"	3"	AA1DHPS57(5)()	416.
	64" high Dividends Horizon Panel or Screen	64"	1"	3"	AA1DHPS64(5)()	416.
Top clip for Dividends Horizon panels and screens to lower Service Wall	Top clip for Dividends Horizon Panel/Screen to Service Wall				AA1DHTC()	108.

Order Code	Specification Information	Application Notes
Example: AA1 DHPS 36 (5)	1.Top cap type 5=Metal flat	Panel/screen starter includes a clamp bracket that attaches to the structural base cover of the Service Wall to start a Dividends panel/screen run perpendicular to the face of the Service Wall anywhere other than at the end of the Service Wall.
AA1 Accessory		
DH Dividends Horizon	2.Paint finish	
PS Panel starter	All standard paint finishes	
36 Panel height		
5 Top cap type		Top clip, which secures top edge of panel to underside of Service Wall crown, is required in addition to panel starter for stability of 57" or higher panels or 50"H panels with cantilevered shelves overhead storage.
613 Painted finish		

Power, data and communications components for Service Walls

Currents

2+2 raceway outlet module, central switch and outlets

description	type	w	d	h	pattern no.	black	orange(-O) or Orange triangle(-T)	no finish
Desk height outlet module	21-48"H	5"	–	6"	AR1 EOM			\$218.
								
Central switch	21-48"H				AR1-ELS-B			608.
Duplex outlet	Circuit A				AR1 DA	52.		
	Circuit A, with controlled symbol				AR1 DAC	52.		
	Circuit B				AR1 DB	52.		
	Circuit B, with controlled symbol				AR1 DBC	52.		
	Circuit X				AR1 DX	52.	58.	
	Circuit X, with controlled symbol				AR1 DXC	52.		
	Circuit Y				AR1 DY	52.	58.	
	Circuit Y, with controlled symbol				AR1 DYC	52.		

Order Code	Specification Information	Application Notes
Example: AR1 EOM	Raceway components distribute four 20-amp circuits at desk height or service wall base: two convenience circuits and two protected circuits, with separate grounds and heavy duty #10 neutrals.	Service Wall power may be distributed point-to-point between outlet modules at desk height or in the base raceway.
AR1 Raceway		
E 2+2		
OM Outlet module		
		Outlet housings and power rails accept two duplex outlets on each face and four connector/jumper cables.
		Modular desk-height outlet module mounts between frame studs at any height from 21" - 48", above or below adjacent worksurfaces. Each 12"W frame bay can accept two outlet housings (up to four duplex outlets on each side.)
		Central switch controls three outlets inside Service Wall frame for task ambient lights. Switch occupies right-hand outlet opening in outlets cover on one side of Service Wall.
		Switches cannot be positioned back-to-back in combination with an outlet module.
		Central switch includes white rocker switch, connector to adjacent outlet module, and three simplex outlets on circuit B (2+2 or 3+3).
		Outlet modules and power rails accept two duplex outlets on each face. Specify outlets with black face for convenience circuits. Specify orange face or black with orange triangle for protected circuits with separate ground and neutral in building power supply.

Power, data and communications components for Service Walls

2+2 raceway other hardware

Currents

Service Walls and components


description	type	w	d	h	pattern no.	no finish
Power infeeds, modular	Base power	49"			AR1 EPI2	\$208.
	Ceiling infeed	145"			AR1 EPIC	314.
	Desk height power	85"			AR1 EPI5	251.
Hardwire base infeeds (NYC)	One connector				AR1 EPH1	417.
	Two connectors				AR1 EPH2	627.
Transitional connectors for Reff	12"	61"			AR1 ET1	231.
	36"	85"			AR1 ET3	291.
	60"	109"			AR1 ET5	334.
	96"	133"			AR1 ET8	371.
Jumper cable	12" wall/36" desk	37"			AR1 EJ1	126.
	120" wall/144" desk	145"			AR1 EJ10	333.
	144" wall	169"			AR1 EJ12	371.
	24" wall/48" desk	49"			AR1 EJ2	166.
	36" wall/60" desk	61"			AR1 EJ3	190.
	48" wall/72" desk	73"			AR1 EJ4	205.
	60" wall/84" desk	85"			AR1 EJ5	231.
	72" wall/96" desk	97"			AR1 EJ6	251.
	96" wall/120" desk	121"			AR1 EJ8	291.

Order Code	Specification Information	Application Notes
Example: AR1 ET1	<p>Raceway components distribute four 20-amp circuits at desk height or panel base: two convenience circuits and two protected circuits, with separate grounds and heavy duty #10 neutrals.</p> <p>NOTE: The City of New York does not approve use of liquid-tight PVC conduit. For installations anywhere in the City of New York, specify NYC infeed kits (AR1 EPH1 or 2, AR1 TPH1 or 2), which do not contain PVC. To connect power from the Service Wall to wall-started panels: specify standard (not transitional) jumper cables. Also specify Raceway Cable Managers (AR1 RCM) to support power jumpers within the Service Wall base between the base or desk-height power module and the attached panel.</p>	distance from Service Wall desk-height outlet module to perpendicular panel with powered base.
AR1 Raceway		Specify jumper cables between outlet modules. 48" Service Wall dimension indicates maximum Service Wall cover width between outlets covers at the same height. Excess cable may be stored in interior of wall frame.
E 2+2		Base raceway power rail is suspended between panel supports 3" above floor. 48" Service Wall accepts one 12" rail, 60" Service Wall accepts one 24" rail, 72" accepts two 12" rails. 12" rails may also be inserted at any straight connection.
T Transitional		Specify 12" base power connector between 12" rails in a 72"W Service Wall base, or straddling a Service Wall connection. Specify 36" base power connector to pass through a connection between adjacent powered bases.
1 Length		
	<p>Desk height power infeed connects from floor box to desk height outlets module inside Service Wall.</p> <p>Ceiling infeed connects from ceiling junction box to desk height outlet module or to base power rail. Specify Currents ceiling infeed panel separately.</p> <p>Base power infeed connects building power to either end of base raceway power rail.</p> <p>Hardwire base infeed is approved for City of New York installations. Infeed includes junction box for base raceway and connector to desk height outlet module, or two connectors to adjacent base raceway power rails.</p> <p>Transitional connectors connect Service Wall power components to powered Reff panels. Application dimension indicates</p>	

Power, data and communications components for Service Walls

2+2 raceway other hardware

Currents

description	type	w	d	h	pattern no.	no finish
Base raceway power rail	48" or 72" frame	12"	–	2"	AR1 E2	\$231.
	60" frame	24"	–	2"	AR1 E3	273.
						
Base power connector	Frame to frame	36"			AR1 EPC2	126.
	Within a frame	12"			AR1 EPC1	105.

Order Code	Specification Information	Application Notes
Example: AR1 ET1		
AR1 Raceway	Raceway components distribute four 20-amp circuits at desk height or panel base: two convenience circuits and two protected circuits, with separate grounds and heavy duty #10 neutrals. NOTE: The City of New York does not approve use of liquid-tight PVC conduit. For installations anywhere in the City of New York, specify NYC infeed kits (AR1 EPH1 or 2, AR1 TPH1 or 2), which do not contain PVC. To connect power from the Service Wall to wall-started panels: specify standard (not transitional) jumper cables. Also specify Raceway Cable Managers (AR1 RCM) to support power jumpers within the Service Wall base between the base or desk-height power module and the attached panel.	distance from Service Wall desk-height outlet module to perpendicular panel with powered base.
E 2+2		Specify jumper cables between outlet modules. Application dimension indicates maximum Service Wall cover width between outlets covers at the same height. Excess cable may be stored in interior of wall frame.
T Transitional		Base raceway power rail is suspended between panel supports 3" above floor. 48" Service Wall accepts one 12" rail, 60" Service Wall accepts one 24" rail, 72" accepts two 12" rails. 12" rails may also be inserted at any straight connection.
1 Length		Specify 12" base power connector between 12" rails in a 72"W Service Wall base, or straddling a Service Wall connection. Specify 36" base power connector to pass through a connection between adjacent powered bases.
		Desk height power infeed connects from floor box to desk height outlets module inside Service Wall.
		Ceiling infeed connects from ceiling junction box to desk height outlet module or to base power rail. Specify Currents ceiling infeed panel separately.
		Base power infeed connects building power to either end of base raceway power rail.
		Hardwire base infeed is approved for City of New York installations. Infeed includes junction box for base raceway and connector to desk height outlet module, or two connectors to adjacent base raceway power rails.
		Transitional connectors connect Service Wall power components to powered Reff panels. Application dimension indicates


Power, data and communications components for Service Walls

Currents

3+3 raceway outlet module, central switch and outlets

Service Walls and components

description	type	w	d	h	pattern no.	black	orange(-O) or Orange triangle(-T)	no finish
Desk-height outlet module	21"-48"H	6"	1"	9"	AR1 TOM			\$251.



Central switch	21-48"H				AR1-ELS-B			608.
Duplex outlet	Circuit A				AR1 DA	52.		
	Circuit A, with controlled symbol				AR1 DAC	52.		
	Circuit B				AR1 DB	52.		
	Circuit B, with controlled symbol				AR1 DBC	52.		
	Circuit C				AR1 DC	52.		
	Circuit C, with controlled symbol				AR1 DCC	52.		
	Circuit X				AR1 DX	52.	58.	
	Circuit X, with controlled symbol				AR1 DXC	52.		
	Circuit Y				AR1 DY	52.	58.	
	Circuit Y, with controlled symbol				AR1 DYC	52.		
	Circuit Z				AR1 DZ	52.	58.	
	Circuit Z, with controlled symbol				AR1 DZC	52.		

Order Code	Specification Information	Application Notes
Example: AR1 TOM	Raceway components distribute six 20-amp circuits at desk height or wall base: three convenience circuits and three protected circuits, with separate grounds and heavy-duty #10 neutrals.	Service Wall power may be distributed point-to-point between outlet modules at desk height or in the base raceway.
AR1 Raceway		
T 3+3		
OM Outlet Module		
		Central switch includes white rocker switch, connector to adjacent outlet module, and three simplex outlets on circuit B (2+2 or 3+3).
		Outlet modules and power rails accept two duplex outlets on each face. Specify outlets with black face for convenience circuits. Specify orange face or black with orange triangle for protected circuits with separate ground and neutral in building power supply.
		Outlet housings and power rails accept two duplex outlets on each face and four connector/jumper cables.
		Modular desk-height outlet module mounts between frame studs at any height from 21" - 48", above or below adjacent worksurfaces. Each 12"W frame bay can accept two outlet housings (up to four duplex outlets on each side.)
		Central switch controls three outlets inside Service Wall frame for task ambient lights. Switch occupies right-hand outlet opening in outlets cover on one side of Service Wall.
		Switches cannot be positioned back-to-back in combination with an outlet module.

Power, data and communications components for Service Walls

Currents

3+3 raceway other hardware

description	type	w	d	h	pattern no.	no finish
Power infeeds	Base power	49"			AR1 TPI2	\$251.
	Ceiling infeed	145"			AR1 TPIC	357.
	Desk height power	85"			AR1 TPI5	291.
Hardwire base infeeds (NYC)	One connector				AR1 TPH1	461.
	Two connectors				AR1 TPH2	714.
Jumper cable	12" wall/36" desk	37"			AR1 TJ1	143.
	120" wall/144" desk	145"			AR1 TJ10	371.
	144" wall	169"			AR1 TJ12	416.
	24" wall/48" desk	49"			AR1 TJ2	190.
	36" wall/60" desk	61"			AR1 TJ3	231.
	48" wall/72" desk	73"			AR1 TJ4	251.
	60" wall/84" desk	85"			AR1 TJ5	273.
	72" wall/96" desk	97"			AR1 TJ6	291.
Transitional connectors for Reff	12"	61"			AR1 TT1	273.
	36"	85"			AR1 TT3	334.
	60"	109"			AR1 TT5	371.
	96"	133"			AR1 TT8	417.
Base raceway power rail	48" or 72" frame	12"			AR1 T2	273.
	60" frame	24"			AR1 T3	314.
Base power connectors	Frame to frame	37"			AR1 TPC2	143.
	Within a frame	13"			AR1 TPC1	126.

Order Code	Specification Information	Application Notes
Example: AR1 TT5		
AR1 Raceway	Raceway components distribute four 20-amp circuits at desk height or panel base: two convenience circuits and two protected circuits, with separate grounds and heavy duty #10 neutrals. NOTE: The City of New York does not approve use of liquid-tight PVC conduit. For installations anywhere in the City of New York, specify NYC infeed kits (AR1 EPH1 or 2, AR1 TPH1 or 2), which do not contain PVC. To connect power from the Service Wall to wall-started panels: specify standard (not transitional) jumper cables. Also specify Raceway Cable Managers (AR1 RCM) to support power jumpers within the Service Wall base between the base or desk-height power module and the attached panel.	distance from Service Wall desk-height outlet module to perpendicular panel with powered base.
T 3+3		Specify jumper cables between outlet modules. Application dimension indicates maximum Service Wall cover width between outlets covers at the same height. Excess cable may be stored in interior of wall frame.
T Transitional		Base raceway power rail is suspended between panel supports 3" above floor. 48" Service Wall accepts one 12" rail, 60" Service Wall accepts one 24" rail, 72" accepts two 12" rails. 12" rails may also be inserted at any straight connection.
5 Length		Specify 12" base power connector between 12" rails in a 72"W Service Wall base, or straddling a Service Wall connection. Specify 36" base power connector to pass through a connection between adjacent powered bases.
		Desk height power infeed connects from floor box to desk height outlets module inside Service Wall.
		Ceiling infeed connects from ceiling junction box to desk height outlet module or to base power rail. Specify Currents ceiling infeed panel separately.
		Base power infeed connects building power to either end of base raceway power rail.
		Hardwire base infeed is approved for City of New York installations. Infeed includes junction box for base raceway and connector to desk height outlet module, or two connectors to adjacent base raceway power rails.
		Transitional connectors connect Service Wall power components to powered Reff panels. Application dimension indicates

Power, data and communications components for Service Walls

replacement components for Equity

Currents

Service Walls and components





description	type	w	d	h	pattern no.	black	orange(-O) or Orange triangle(-T)	no finish
Replacement duplexes for Equity	Circuit A				ARE1 DA	\$52.		
	Circuit B				ARE1 DB	52.		
	Circuit C				ARE1 DC	52.		
	Circuit X				ARE1 DX	52.		
	Circuit X, orange face or orange triangle				ARE1 DX (O or T)		58.	
	Circuit Y				ARE1 DY	52.		
	Circuit Y, orange face or orange triangle				ARE1 DY (O or T)		58.	
	Circuit Z				ARE1 DZ	52.		
	Circuit Z, orange face or orange triangle				ARE1 DZ (O or T)		58.	
Transitional power connector Equity 2+2	12"		61"		ARE1 ET1			231.
	36"		85"		ARE1 ET3			291.
	60"		109"		ARE1 ET5			334.
Transitional power connector Equity 3+3	12"		61"		ARE1 TT1			273.
	36"		85"		ARE1 TT3			334.
	60"		109"		ARE1 TT5			371.
Replacement power infeed, Equity panel	2+2				ARE1 EP1			343.
	3+3				ARE1 TP1			398.

Order Code	Specification Information	Application Notes
Example: ARE1 ET3		
ARE1	Currents/Equity raceway	<p>Replacement duplexes for Equity convert existing 3+1 terminal blocks in Equity panels to 2+2 when connected to and supplied by Service Wall 2+2 or 3+3 power.</p> <p>Transitional power connector connects Service Wall power components to Equity panel base power.</p> <p>Application dimension indicates distance between Service Wall outlet module (at 30" - 39"H) and perpendicular panel.</p> <p>Specify replacement power infeed when supplying power to Service Wall from Equity panel base infeed.</p>
E	Eight wire 2+2	
T	Transitional connector	
3	Width	

Power, data and communications components for Service Walls

accessories, ceiling infeed panel

Currents

description	type	w	d	h	pattern no.	no finish	Paint
Cable clips for wall studs (100)		1/4"	1/2"	1 1/2"	AR1 PCC 100	\$105.	
							
High capacity cable holders (10)		1"	3/4"	2 1/2"	AR1 HCC H10	44.	
							
Raceway cable managers (10)					AR1 RCM 10	85.	
							
Ceiling infeed panel for stabilizer end cabinet, T-end or power monument		3 1/2"	5"	48"	APX CIP4 ()		639.
		3 1/2"	5"	72"	APX CIP6 ()		747.
		3 1/2"	5"	96"	APX CIP8 ()		854.
							

Order Code	Specification Information	Application Notes	
Example: AR1 PCC 100	Cable clips and cable managers are black plastic.	Specify cable clips, approximately 50 per wall frame to support and manage cables on the face of studs in the Service Wall frame. Each clip manages up to 14 Category 5 or fiber optic cables; four clips attach between 21"-30", 30"-39", 39"-48"; six between 48"-64"H. Only two clips fit behind a cable tray cover at the 21"-30" height..	Raceway cable managers are U-shape cable supports that snap into the underside of the Service Wall frame. Plan one per foot to contain data cables or power jumpers in the base raceway.
AR1 Raceway	Cable holders are light grey plastic.	Specify high capacity cable holders approximately 20 per Service Wall frame to support and manage larger bundles of cables. Each holds up to 55 Cat 5 cables; two holders attach to studs at each 9" level; three holders at the 16" level of a 64"H Service Wall. Only one holder fits behind a cable tray cover at the 21"-30" height (upside down).	Ceiling infeed panel attaches to end of Service Wall adjacent to Currents or Reff T-end panel with 3 1/2" extension, or to power monument. Center channel, 2" x 2 1/2", accommodates one or two power infeed cables. Each side channel is 1 1/2" x 3 1/2" lay-in cable raceway, for continuous lay-in cabling from ceiling to Service Wall surface.
PCC Cable clip	<i>Specify painted finish for hardwire outlets cover or ceiling infeed panel.</i>		Specify ceiling infeed separately.
100 Size / Quantity	High capacity cable holders may not be used in conjunction with AutoStrada access covers.		

Power, data and communications components for Service Walls

PDC modules, modular communications

Currents

Service Walls and components


description	type	w	d	h	pattern no.	black
AMP PDC Modules	Faceplate and 4 Enhanced Category 5 outlets				AMC PDC 5E4N	\$280.
AMP Modular components	Blank insert (10)				AMC B10	33.
	Category 3 outlet (RJ11 six position)				AMC O3	33.
	Category 6 quantum (RJ45, 110)				AMC O6	65.
	Communications faceplates				AMC FP2 (L or N)	33.
	Communications faceplates				AMC FP3 (L or N)	33.
	Enhanced Category 5 outlet (RJ45, 110)				AMC O5E	45.
	Fiber optics outlet 50/125 micron fiber jack				AMC OF500	225.
	Fiber optics outlet 62.5/125 micron fiber jack				AMC OF625	225.
AMP modular communications/ zone distribution	AMP NetConnect consolidation point, 12-port				AMC5 CP12	886.
	AMP NetConnect mounting bracket				AMB CP12-AMP	58.
	AMP pre-terminated outlet cable, 20'				AMC5 OC20(A or B)	111.
	AMP pre-terminated outlet cable, 30'				AMC5 OC30(A or B)	126.
	AMP pre-terminated outlet cable, 40'				AMC5 OC40(A or B)	135.
	AMP pre-terminated outlet cable, 50'				AMC5 OC50(A or B)	142.
Lucent zone distribution	Hinged mounting brackets for 24-port consolidation point (pair)				AMB CP24 LUC	163.
Outlet fillers (Set of 10)					AR OF	46.

Order Code	Specification Information	Application Notes
Example: MR3 AMP3B	<i>For AMP pre-terminated outlet cables specify:</i>	PDC Modules are preconfigured or created from modular components and faceplate that snaps into Service Wall outlets cover, raceway cover.
MR3 Raceway/PDC	T568A or T568B wiring.	
AMP Type	<i>For AMP outlet faceplates specify:</i>	
3B Configuration	L Light grey N Black	Specify PDC Module extenders for adequate clearance between modules in back-to-back applications, or for fiber optics ST connectors.
	Amp outlets are black. Lucent faceplates are light grey.	Specify blank filler plates for any unused outlet openings in outlets covers or raceway covers.
		AMP Net Connect mounting bracket supports one 12-port consolidation point on stud or two in stabilizer end cabinet.
		AMP pre-terminated outlet cables include outlet and plug into consolidation point. AMP outlet faceplate snaps into outlets cover and supports cable outlet.
		Each Lucent mounting bracket supports one 24-port consolidation point and is hinged for easy access. Bracket mounts on Service Wall frame or stabilizer end cabinet.

Mobile screens

upholstered surfaces


Currents


description	type	w	d	h	pattern no.	10	15	20	30	35	40	45	50	55
 Mobile screen, upholstered	48"H	48"	2"	48"	AF 4848 AM () ()	\$2,014.	\$2,072.	\$2,126.	\$2,242.	\$2,296.	\$2,355.	\$2,410.	\$2,524.	\$2,638.
		60"	2"	48"	AF 4860 AM () ()	2,200.	2,256.	2,319.	2,433.	2,487.	2,542.	2,598.	2,711.	2,825.
	64"H	48"	2"	64"	AF 6448 AM () ()	2,187.	2,256.	2,335.	2,487.	2,559.	2,638.	2,711.	2,861.	3,012.
		60"	2"	64"	AF 6460 AM () ()	2,559.	2,638.	2,711.	2,861.	2,938.	3,012.	3,087.	3,238.	3,393.


Order Code	Specification Information	Application Notes
Example: AF 4872 TCM 612		
AF Screen	<i>Surface types:</i> A Tackable upholstered	Upholstered screens are tackable, acoustical surface both sides. Continuous edge trim is trim grey.
48 Height	<i>Surface finishes:</i> C Crystal	The bottom 15" of upholstered mobile screens consists of supporting ballast board and is not tackable area.
72 Width	<i>Specify base finish.</i>	
T Surface type	<i>Base type:</i> M Mobile	Mobile screens are supported by stabilizer feet.
C Surface finish	<i>Specify fabric group:</i>	Non-locking casters to meet BIFMA stability standards.
M Base type	10 Fabric group 10	When ordering 60" wide upholstered screens, please check width of fabric selected.
612 Base finish	15 Fabric group 15	
	20 Fabric group 20	
	30 Fabric group 30	
	35 Fabric group 35	
	40 Fabric group 40	
	50 Fabric group 50	
	55 Fabric group 55	

Add-up panels
upholstered surface
Service Wall crown applications

Currents




description	w	d	h	pattern no.	10	15	20	30	35	40	45	50	55
12"H add-up panels 	24"	2"	12"	AU 1224 A ()	\$530.	\$552.	\$570.	\$610.	\$632.	\$650.	\$668.	\$712.	\$744.
	36"	2"	12"	AU 1236 A ()	610.	632.	650.	690.	712.	728.	744.	786.	828.
	48"	2"	12"	AU 1248 A ()	690.	712.	728.	766.	786.	804.	828.	864.	906.
	60"	2"	12"	AU 1260 A ()	804.	828.	846.	886.	906.	924.	942.	984.	1,020.

21"H add-up panels 	24"	2"	21"	AU 2124 A ()	656.	690.	720.	772.	804.	834.	864.	924.	984.
	36"	2"	21"	AU 2136 A ()	760.	786.	818.	874.	906.	936.	964.	1,020.	1,080.
	48"	2"	21"	AU 2148 A ()	852.	886.	914.	970.	1,004.	1,032.	1,062.	1,120.	1,180.
	60"	2"	21"	AU 2160 A ()	1,004.	1,032.	1,062.	1,120.	1,154.	1,180.	1,210.	1,270.	1,326.

28"H add-up panels 	24"	2"	28"	AU 2824 A ()	786.	828.	864.	942.	984.	1,020.	1,062.	1,136.	1,216.
	36"	2"	28"	AU 2836 A ()	906.	942.	984.	1,062.	1,104.	1,136.	1,180.	1,256.	1,334.
	48"	2"	28"	AU 2848 A ()	1,020.	1,062.	1,104.	1,180.	1,216.	1,256.	1,296.	1,376.	1,456.
	60"	2"	28"	AU 2860 A ()	1,200.	1,236.	1,282.	1,356.	1,395.	1,438.	1,472.	1,556.	1,630.

Screens and add-up panels

Order Code	Specification Information	Application Notes			
Example: AU 2848 A20	<i>Surface types:</i>	Add-up panels add visual and acoustical privacy above any height Service Wall. Bottom edge, with wedge-shape plugs, inserts in center of crown at any point, regardless of upmounted storage. Add-up panels include continuous edge trim.	<i>Overall height of service wall with 4" standard crown and Add-up panels:</i>		
AU Add up panel	A Tackable upholstered				
28 Height	<i>Specify fabric group for upholstered add-up panels:</i>				
48 Width	10 Fabric group 10	Upholstered add-up panels have been tested to NRC .60 and STC 21.	Nominal wall height	Add-up height	Overall height
A Surface type	15 Fabric group 15		39"	12"	55"
20 Fabric group	20 Fabric group 20		39"	21"	64"
	30 Fabric group 30		39"	28"	71"
	35 Fabric group 35		48"	12"	64"
	40 Fabric group 40	When ordering 60" wide panels, please check width of fabric selected.	48"	21"	73"
	45 Fabric group 45		48"	28"	80"
	50 Fabric group 50		64"	12"	80"
	55 Fabric group 55		64"	21"	89"
	Edge trim is integral color trim grey finish.		64"	28"	96"
	Specify wide add-up panels for use on long Service Wall and Fence runs.				

description	type	width	depth	height	pattern number	clear tempered	powder
Add up panels	frameless glass, 8"h 	24"	1/2"	8"	AUA1 0824 G () ()	\$315.	\$384.
		36"	1/2"	8"	AUA1 0836 G () ()	358.	515.
		48"	1/2"	8"	AUA1 0848 G () ()	463.	642.
		60"	1/2"	8"	AUA1 0860 G () ()	570.	827.
		72"	1/2"	8"	AUA1 0872 G () ()	642.	999.
	frameless glass, 12"h 	24"	1/2"	12"	AUA1 1224 G () ()	377.	433.
		36"	1/2"	12"	AUA1 1236 G () ()	534.	612.
		48"	1/2"	12"	AUA1 1248 G () ()	680.	786.
		60"	1/2"	12"	AUA1 1260 G () ()	831.	961.
		72"	1/2"	12"	AUA1 1272 G () ()	984.	1,131.
	frameless glass, 15"h 	24"	1/2"	15"	AUA1 1524 G () ()	384.	675.
		36"	1/2"	15"	AUA1 1536 G () ()	534.	749.
		48"	1/2"	15"	AUA1 1548 G () ()	684.	1,075.
		60"	1/2"	15"	AUA1 1560 G () ()	841.	1,213.
		72"	1/2"	15"	AUA1 1572 G () ()	990.	1,419.

Order Code	Specification Information	Application Notes
Example: AUA1 1248 G TEMP AA	<i>Add up type:</i>	Add-up panels add acoustical privacy and light control above any height Service Wall.
AUA1 Autostrada add up panel	G Glass	
12 Height	Glass add-ups are available with the following glass options:	Anodized aluminum or painted base frame inserts in center of any Service Wall crown and is secured by bolts within crown.
48 Width	TEMP Clear tempered	
G Type	GL13 Powder	Frameless glass add-ups can be positioned at any 3" increment in standard or compact crown with any cover type.
TEMP Glass Finish	Specify wide add-up panels for use on long Service Wall and Fence runs.	
AA Trim Finish		

- Any height add up can be used on any height AutoStrada or Currents Service Wall or Fence.
- 8"h Add ups are designed primarily for use on 39"h spine with 1"h crown to create a 48"h horizon.
 - 12"h Add ups are designed for use on 48"h spine for a 61" horizon with 1"h crown or a 64" horizon with 4"h crown.
 - 15"h Add ups are designed primarily for use on 48"h spine with 1"h crown for a 64" horizon.

Add-up panel connectors and fillers

field retrofit kits

Currents

description	type	pattern no.	list price
Field Retrofit Trim Kit for non-stackable add-up panels	12 x 24	AUA1224	n/c
	12 x 36	AUA1236	n/c
	12 x 48	AUA1248	n/c
	12 x 60	AUA1260	n/c
	12 x 72	AUA1272	n/c
	21 x 24	AUA2124	n/c
	21 x 36	AUA2136	n/c
	21 x 48	AUA2148	n/c
	21 x 60	AUA2160	n/c
	21 x 72	AUA2172	n/c
	28 x 24	AUA2824	n/c
	28 x 36	AUA2836	n/c
	28 x 48	AUA2848	n/c
	28 x 60	AUA2860	n/c
	28 x 72	AUA2872	n/c






Screens and add-up panels

Order Code	Specification Information
Example: AUA1224	Finish is trim grey.
AU Add-up	Fillers require retrofitting add-up panels with new trim.
A Type	
12 Height	Retrofit trim kits are no-charge (n/c) items specified separately.
24 Width	

Add-up panel connectors and fillers

Service Wall applications


Currents

description	w	d	h	pattern no.	list price
Straight alignment clip 	3"	2"	–	AU1 CS	\$13.
L connector add-up fillers 	6"	6"	16"	AU1 CL12	473.
	6"	6"	25"	AU1 CL21	567.
	6"	6"	32"	AU1 CL28	666.
T connector add-up fillers 	6"	6"	16"	AU1 CT12	473.
	6"	6"	25"	AU1 CT21	567.
	6"	6"	32"	AU1 CT28	666.
T-end 1 1/8" extension fillers 	2"	1 1/8"	16"	AU1 X112	285.
	2"	1 1/8"	25"	AU1 X121	328.
	2"	1 1/8"	32"	AU1 X128	377.
T-end 3 1/2" extension fillers 	2"	3 1/2"	16"	AU1 X312	377.
	2"	3 1/2"	25"	AU1 X321	425.
	2"	3 1/2"	32"	AU1 X328	473.

Order Code	Specification Information	Application Notes
Example: AU1 CL12		
AU1 Add-up	Add-up fillers and alignment clip are painted trim grey finish.	Straight connector clips over adjacent non-stackable add-up panels.
CL Connector type	Pattern numbers correspond to add-up panel height.	Add-up fillers join between add-up panels over a service wall connection or a T-end to extend enclosure from bottom of crown to top of add-up. Fillers require retrofitting add-up panels with new trim.
12 Application		Retrofit kits are no-charge items that are specified separately.

Stackable add-up panels
glazed, translucent fiberglass and marker surface
first up panels

Currents


description	w	d	h	pattern no.	acrylic W (C)	acrylic W (T)	marker (M)
 First up panel on service wall crown	24"	2"	12"	AY1 1224C()	\$761.	\$829.	\$792.
	36"	2"	12"	AY1 1236C()	882.	963.	922.
	48"	2"	12"	AY1 1248C()	1,009.	1,103.	1,096.
	60"	2"	12"	AY1 1260C()	1,077.	1,181.	n/a
	24"	2"	21"	AY1 2124C()	828.	899.	895.
	36"	2"	21"	AY1 2136C()	962.	1,056.	1,042.
	48"	2"	21"	AY1 2148C()	1,101.	1,212.	1,247.
	60"	2"	21"	AY1 2160C()	1,255.	1,380.	n/a
	24"	2"	28"	AY1 2824C()	1,148.	1,259.	956.
	36"	2"	28"	AY1 2836C()	1,359.	1,495.	1,124.
	48"	2"	28"	AY1 2848C()	1,571.	1,732.	1,336.
	60"	2"	28"	AY1 2860C()	1,707.	1,875.	n/a

Screens and add-up panels

Order Code	Specification Information	Application Notes
Example: AY1 1636M WC 117	Top and edge trim are trim grey.	Stackable add-up panels provide adaptable privacy on Service Walls. First up panels include top and edge trims and bayonet supports that bolt on to Service Wall frame. All stackable add-up panels may be removed without tools. Specify trim caps and connectors separately.
AY1 Stackable add-up	Specify surface type.	
16 Height	W Glazed	
36 Width	M Marker surface (both sides)	
M Mounting kit	Specify wide add-up panels for use on long Service Wall and Fence runs.	
W Surface type		
C Acrylic finish		
117 Frame finish		

Stackable add-up panels
glazed, translucent fiberglass and marker surface
next up panels

Currents

description	w	d	h	pattern no.	acrylic W (C)	acrylic W (T)	marker (M)
 Next up panel on stackable add-up panels	18"	2"	16"	AY1 1618S()	\$713.	\$770.	n/a
	24"	2"	16"	AY1 1624S()	770.	836.	826.
	30"	2"	16"	AY1 1630S()	834.	913.	886.
	36"	2"	16"	AY1 1636S()	901.	985.	961.
	42"	2"	16"	AY1 1642S()	959.	1,050.	1,039.
	48"	2"	16"	AY1 1648S()	1,024.	1,121.	1,141.
	60"	2"	16"	AY1 1660S()	1,114.	1,213.	n/a

Order Code	Specification Information	Application Notes
Example: AY1 1636S WC 117	Top and edge trim are trim grey.	Stackable add-up panels provide adaptable privacy on Service Walls. Next up panels include intermediate masts that engage into sides of corresponding width first up or next-up panels. All stackable add-up panels may be removed without tools. Specify trim caps and connectors separately.
AY1 Stackable add-up	<i>Specify surface type.</i>	
16 Height	W Glazed	
36 Width	M Marker surface (both sides)	
S Mounting kit	Specify wide add-up panels for use on long Service Wall and Fence runs.	
W Surface type	A maximum of one next up stackable add-up panel may be used on top of a first up stackable add-up panel.	
C Acrylic finish		
117 Frame finish		

Stackable add-up panels
upholstered
first up panels

Currents

description	w	d	h	pattern no.	10	15	20	30	35	40	45	50	55
First up panel on service wall crown	24"	2 1/4"	12"	AY1 1224C A()	\$598.	\$644.	\$654.	\$722.	\$754.	\$800.	\$846.	\$880.	\$924.
	36"	2 1/4"	12"	AY1 1236C A()	692.	758.	768.	850.	892.	952.	1,012.	1,056.	1,110.
	48"	2 1/4"	12"	AY1 1248C A()	804.	882.	910.	1,006.	1,052.	1,126.	1,206.	1,254.	1,320.
	60"	2 1/4"	12"	AY1 1260C A()	906.	996.	1,014.	1,128.	1,184.	1,274.	1,362.	1,416.	1,496.
	24"	2 1/4"	21"	AY1 2124C A()	650.	712.	724.	792.	832.	884.	944.	976.	1,032.
	36"	2 1/4"	21"	AY1 2136C A()	764.	834.	850.	948.	996.	1,060.	1,128.	1,174.	1,242.
	48"	2 1/4"	21"	AY1 2148C A()	896.	984.	1,008.	1,124.	1,174.	1,264.	1,346.	1,404.	1,486.
	60"	2 1/4"	21"	AY1 2160C A()	1,004.	1,104.	1,130.	1,266.	1,328.	1,432.	1,526.	1,598.	1,684.




Screens and add-up panels

Order Code	Specification Information	Application Notes
Example: AY1 1660M A20	Top and trim edge are trim grey.	Stackable add-up panels provide adaptable privacy on Service Walls. First up panels include top and edge trims and bayonet supports that bolt on to Service Wall frame. All stackable add-up panels may be removed without tools.
AY1 Stackable panel	<i>Surface type:</i>	
16 Height	A Tackable upholstered	
60 Width	<i>Specify fabric group:</i>	
M Mounting kit	10 Fabric group 10	
A Surface type	15 Fabric group 15	
20 Fabric group	20 Fabric group 20	
	30 Fabric group 30	
	35 Fabric group 35	
	40 Fabric group 40	
	50 Fabric group 50	
	55 Fabric group 55	
	Specify wide add-up panels for use on long Service Wall and Fence runs.	

Stackable add-up panels
upholstered
next up panels

Currents

description	w	d	h	pattern no.	10	15	20	30	35	40	45	50	55
 Next up panel on stackable add-up panels	18"	2 1/4"	16"	AY1 1618S A()	\$574.	\$630.	\$638.	\$704.	\$732.	\$782.	\$828.	\$856.	\$906.
	24"	2 1/4"	16"	AY1 1624S A()	606.	662.	670.	738.	770.	826.	874.	908.	952.
	30"	2 1/4"	16"	AY1 1630S A()	662.	722.	734.	816.	846.	908.	958.	1,000.	1,050.
	36"	2 1/4"	16"	AY1 1636S A()	712.	772.	790.	876.	920.	988.	1,044.	1,088.	1,152.
	42"	2 1/4"	16"	AY1 1642S A()	778.	852.	874.	968.	1,016.	1,090.	1,162.	1,212.	1,282.
	48"	2 1/4"	16"	AY1 1648S A()	830.	912.	936.	1,036.	1,082.	1,164.	1,242.	1,292.	1,368.
	60"	2 1/4"	16"	AY1 1660S A()	928.	1,020.	1,050.	1,166.	1,226.	1,318.	1,406.	1,466.	1,552.

Order Code	Specification Information	Application Notes
Example: AY1 1660S A20	Top and trim edge are trim grey.	Stackable add-up panels provide adaptable privacy on Service Walls. Next up panels include intermediate masts that engage into sides of corresponding width first up or next-up panels. All stackable add-up panels may be removed without tools.
AY1 Stackable panel	Surface type:	
16 Height	A Tackable upholstered	
60 Width	Specify fabric group:	
S Mounting kit	10 Fabric group 10	
A Surface type	15 Fabric group 15	
20 Fabric group	20 Fabric group 20	
	30 Fabric group 30	
	35 Fabric group 35	
	40 Fabric group 40	
	50 Fabric group 50	
	55 Fabric group 55	
	Specify wide add-up panels for use on long Service Wall and Fence runs.	
	A maximum of one next up stackable add-up panel may be used on top of a first up stackable add-up panel.	

Stackable add-up connectors and fillers

Currents

stackable add-up panels

Perpendicular to service wall

description	type	w	d	h	pattern no.	list price
Crown fillers for stackable add-up panels perpendicular to service wall	First up	2"	2"	16"	AY1 PC16	\$305.
	First up	2"	2"	25"	AY1 PC25	323.
	First up	2"	2"	32"	AY1 PC32	337.
	Next up	2"	2"	16"	AY1 SPC16	285.






Screens and add-up panels

Order Code	Specification Information	Application Notes
Example: AU1 PC12 613	<i>Specify finish for vertical cover and top cap.</i>	Crown fillers extend from stackable add-up panel or add-on panel connector to surface of crown-mounted add-up panels. Specify connector separately. Crown filler includes top cap.
AU1 Add-up panel		
PC Crown filler		
12 Height		
613 Finish		

Stackable add-up connectors and fillers

crown applications

Currents

description	type	w	d	h	pattern no.	price
Trim caps 	End cap				AY1 CE	\$5.
	Straight cap	2"	2"	–	AY1 CS	5.
First up straight post 		2"	2"	16"	AY1 LP16	323.
		2"	2"	25"	AY1 LP25	361.
		2"	2"	32"	AY1 LP32	399.
Next up straight post 		2"	2"	16"	AY1 SP16	377.






Order Code	Specification Information	Application Notes
Example: AY1 LL16	Connector caps and connector trims are integral color trim grey.	Trim caps are specified by application to fill top corners of stackable add-up panels. Straight cap aligns adjacent add-up panels. End cap finishes the end of a run of add-up panels.
AY1 Stackable add-up		
L Screen application		
L Configuration		
16 Height		

Next up connectors correspond to next up panels.

Stackable add-up connectors and fillers service wall and T-end applications

Currents







Screens and add-up panels

description	type	w	d	h	pattern no.	list price
 Stackable accessories	Crown-mount masts (replacement)				AY1 CMK	\$78.
	High-low adapter kit				AY1 HLA	94.
	Stacking hardware kit (replacement)				AY1 SMK	54.
 90° 2-way L first up corner fillers		6"	6"	16"	AY1 CL12	567.
		6"	6"	25"	AY1 CL21	666.
		6"	6"	32"	AY1 CL28	759.
 90° 2-way L next up corner fillers		6"	6"	16"	AY1 SCL16	627.
 90° 3-way T corner fillers		7"	6"	16"	AY1 CT12	666.
		7"	6"	25"	AY1 CT21	759.
		7"	6"	32"	AY1 CT28	854.
 90° 3-way T next up corner fillers		7"	6"	16"	AY1 SCT16	720.

Order Code	Specification Information	Application Notes
Example: AY1 CL28	Stackable add-up fillers and trim are trim grey finish.	Hi-low adapter kit includes an end cap and a bayonet with attachment holes to join stackable add-up panels in a straight high/low configuration. The adapter also adapts a corner, T, or X post for high/low corner configurations. Corner fillers join stackable add-ups and fill the space above a Service Wall L or T connection.
AY1 Stackable add-up		
CL Connector type		
28 Height		
		T-end extension fillers fill the 1 1/8" or 3 1/2" space above the extending area of a T-end connection at the end of a Service Wall with stackable add-up panels. All fillers engage into the top corners of corresponding height stackable add-up panels.

Stackable add-up connectors and fillers service wall and T-end applications

Currents

description	type	w	d	h	pattern no.	list price	
	90° 4-way X corner fillers	7"	7"	16"	AY1 CX12	\$759.	
		7"	7"	25"	AY1 CX21	854.	
		7"	7"	32"	AY1 CX28	949.	
	90° 4-way next up corner fillers	7"	7"	16"	AY1 SCX16	815.	
	First up, T-end extension fillers	1" extension	1"	2"	16"	AY1 X112	266.
		1" extension	1"	2"	25"	AY1 X121	285.
		1" extension	1"	2"	32"	AY1 X128	305.
		3 1/2" extension	3 1/2"	2"	16"	AY1 X312	285.
		3 1/2" extension	3 1/2"	2"	25"	AY1 X321	305.
		3 1/2" extension	3 1/2"	2"	32"	AY1 X328	323.
	Next up 1" fillers	1"	2"	16"	AY1 SX116	285.	
	Next up 3 1/2" fillers	3 1/2"	2"	16"	AY1 SX316	305.	
	T-end stackable fillers	First up	7"	2"	16"	AY1 AXT16	399.
		First up	7"	2"	25"	AY1 AXT25	438.
		First up	7"	2"	32"	AY1 AXT32	473.
		Next up	7"	2"	16"	AY1 AXST16	399.

Order Code

Example:	AY1 CL28
AY1	Stackable add-up
CL	Connector type
28	Height

Specification Information

Stackable add-up fillers and trim are trim grey finish.

Application Notes





Hi-low adapter kit includes an end cap and a bayonet with attachment holes to join stackable add-up panels in a straight high/low configuration. The adapter also adapts a corner, T, or X post for high/low corner configurations.

Corner fillers join stackable add-ups and fill the space above a Service Wall L or T connection.

T-end extension fillers fill the 1 1/8" or 3 1/2" space above the extending area of a T-end connection at the end of a Service Wall with stackable add-up panels.

All fillers engage into the top corners of corresponding height stackable add-up panels.

Worksurfaces, universal
straight, curved and flat front
1 3/4" wire drop

description	w	d	h	pattern no.	lam.
 24"D straight worksurface, curved front	24"	22 1/4"	1"	AW1 S2424 ()	\$366.
	30"	22 1/4"	1"	AW1 S3024 ()	402.
	36"	22 1/4"	1"	AW1 S3624 ()	440.
	42"	22 1/4"	1"	AW1 S4224 ()	477.
	48"	22 1/4"	1"	AW1 S4824 ()	510.
	60"	22 1/4"	1"	AW1 S6024 ()	586.
	66"	22 1/4"	1"	AW1 S6624 ()	623.
	72"	22 1/4"	1"	AW1 S7224 ()	660.
	84"	22 1/4"	1"	AW1 S8424 ()	732.
 30"D straight worksurface, curved front	36"	28 1/4"	1"	AW1 S3630 ()	495.
	48"	28 1/4"	1"	AW1 S4830 ()	564.
	60"	28 1/4"	1"	AW1 S6030 ()	660.
	72"	28 1/4"	1"	AW1 S7230 ()	768.
	84"	28 1/4"	1"	AW1 S8430 ()	881.
 24"D Straight worksurface, flat front	24"	22 1/4"	1"	AW1 F2424 ()	366.
	30"	22 1/4"	1"	AW1 F3024 ()	402.
	36"	22 1/4"	1"	AW1 F3624 ()	440.
	42"	22 1/4"	1"	AW1 F4224 ()	477.
	48"	22 1/4"	1"	AW1 F4824 ()	510.
	60"	22 1/4"	1"	AW1 F6024 ()	586.
	66"	22 1/4"	1"	AW1 F6624 ()	623.
	72"	22 1/4"	1"	AW1 F7224 ()	660.
	84"	22 1/4"	1"	AW1 F8424 ()	732.
 30"D straight worksurface, flat front	36"	28 1/4"	1"	AW1 F3630 ()	495.
	48"	28 1/4"	1"	AW1 F4830 ()	564.
	60"	28 1/4"	1"	AW1 F6030 ()	660.
	72"	28 1/4"	1"	AW1 F7230 ()	768.
	84"	28 1/4"	1"	AW1 F8430 ()	881.


Order Code	Specification Information	Application Notes	
Example: AW1 S4830 117	Worksurface edges are trim grey.	Worksurfaces may be end-supported, cantilevered from Service Wall, or supported by C-leg or pedestal at each end. Universal worksurfaces are interchangeable with Currents desks. Specify supports separately.	24"D straight worksurfaces may be cantilevered with two cantilever brackets.
AW1	Worksurface		
S	Straight	Veneer finishes for Currents worksurfaces are available through Custom Product Development.	24" and 30"D straight worksurfaces may be end supported with two Currents end support brackets.
48	Width		
30	Depth		
117	Top finish	Straight worksurfaces have a 1"D curved front for additional surface area, or a flat front. Flat front allows two straight worksurfaces to meet at right angles.	Universal straight worksurfaces 36" wide and greater include a steel stiffener that doubles as a horizontal cable manager.

Worksurfaces, universal

Currents

corner




1 3/4" wire drop

description	w	d	h	pattern no.	lam.
24"D both sides corner worksurfaces 	42"	42"	1"	AW1 C4242 S ()	\$816.
	48"	48"	1"	AW1 C4848 S ()	906.
	60"	60"	1"	AW1 C6060 S ()	1,268.
30"D both sides corner worksurfaces	42"	42"	1"	AW1 C4242 D ()	816.
	48"	48"	1"	AW1 C4848 D ()	906.
	60"	60"	1"	AW1 C6060 D ()	1,268.
30"D left/24"D right corner worksurfaces	42"	42"	1"	AW1 C4242 L ()	816.
	48"	48"	1"	AW1 C4848 L ()	906.
	60"	60"	1"	AW1 C6060 L ()	1,268.
24"D left/30"D right corner worksurfaces	42"	42"	1"	AW1 C4242 R ()	816.
	48"	48"	1"	AW1 C4848 R ()	906.
	60"	60"	1"	AW1 C6060 R ()	1,268.

Order Code	Specification Information		Application Notes
Example: AW1 C4848S 117			
AW1	Worksurface	Dimensions shown in “w” column are nominal width of left back edge.	Worksurface edges are trim grey. Clear maple laminate is not available on 60w x 60d corner tops.
C	Corner	Dimensions shown in “d” column are nominal width of right back edge.	
48	Width left		Veneer finishes for Currents worksurfaces are available through Custom Product Development.
48	Width right		
S	Depth left and right	<i>Worksurface depths:</i>	Corner worksurfaces may be supported by two cantilever brackets on one back edges in combination with C-leg or pedestal support on other end.
117	Top finish	S 24”D both sides L 30”D left/24”D right R 24”D left/30”D right D 30”D both sides	
		Specify top finish.	Universal corner worksurfaces include a steel stiffener on both back edges that doubles as a horizontal cable manager.

Worksurfaces, universal
extended corner
1 3/4" wire drop
extended left

Currents




description	w	d	h	pattern no.	lam.
24"D both sides corner worksurfaces, extended left 	60"	36"	1"	AW1 C6036 S ()	\$906.
	60"	42"	1"	AW1 C6042 S ()	999.
	60"	48"	1"	AW1 C6048 S ()	1,088.
	72"	36"	1"	AW1 C7236 S ()	1,088.
	72"	42"	1"	AW1 C7242 S ()	1,175.
	72"	48"	1"	AW1 C7248 S ()	1,268.
	84"	36"	1"	AW1 C8436 S ()	1,268.
	84"	42"	1"	AW1 C8442 S ()	1,359.
	84"	48"	1"	AW1 C8448 S ()	1,450.
30"D both sides corner worksurfaces, extended left 	60"	48"	1"	AW1 C6048 D ()	1,178.
	72"	48"	1"	AW1 C7248 D ()	1,359.
	84"	48"	1"	AW1 C8448 D ()	1,540.
30"D left/24"D right corner worksurfaces, extended left 	60"	42"	1"	AW1 C6042 L ()	1,088.
	60"	48"	1"	AW1 C6048 L ()	1,178.
	72"	42"	1"	AW1 C7242 L ()	1,268.
	72"	48"	1"	AW1 C7248 L ()	1,359.
	84"	42"	1"	AW1 C8442 L ()	1,450.
	84"	48"	1"	AW1 C8448 L ()	1,540.
24"D left/30"D right corner worksurfaces, extended left	60"	42"	1"	AW1 C6042 R ()	1,088.
	60"	48"	1"	AW1 C6048 R ()	1,178.
	72"	42"	1"	AW1 C7242 R ()	1,268.
	72"	48"	1"	AW1 C7248 R ()	1,359.
	84"	42"	1"	AW1 C8442 R ()	1,450.
	84"	48"	1"	AW1 C8448 R ()	1,540.

Worksurfaces

Order Code	Specification Information	Application Notes
Example: AW1 C6036S 117	Dimensions shown in "w" column are nominal width of left back edge.	Worksurface edges are trim grey.
AW1 Worksurface	Dimensions shown in "d" column are nominal width of right back edge.	Veneer finishes for Currents worksurfaces are available through Custom Product Development.
C Corner		
60 Width left		
36 Width right		
S Depth left and right		
117 Top finish		
	Worksurface depths: S 24"D both sides L 30"D left/24"D right R 24"D left/30"D right D 30"D both sides	Universal worksurfaces are interchangeable with Currents desks. Specify worksurface supports separately. Corner worksurfaces may be supported by two cantilever brackets on one back edge in combination with C-leg or pedestal support on other end. Universal extended corner worksurfaces include a steel stiffener on both back edges that doubles as a horizontal cable manager.
	Specify top finish.	

Worksurfaces, universal
extended corner
1 3/4" wire drop
extended right

Currents

description	w	d	h	pattern no.	lam.
24"D both sides corner worksurfaces, extended right 	36"	60"	1"	AW1 C3660 S ()	\$906.
	36"	72"	1"	AW1 C3672 S ()	1,088.
	36"	84"	1"	AW1 C3684 S ()	1,268.
	42"	60"	1"	AW1 C4260 S ()	999.
	42"	72"	1"	AW1 C4272 S ()	1,175.
	42"	84"	1"	AW1 C4284 S ()	1,359.
	48"	60"	1"	AW1 C4860 S ()	1,088.
	48"	72"	1"	AW1 C4872 S ()	1,268.
	48"	84"	1"	AW1 C4884 S ()	1,450.
30"D both sides corner worksurfaces, extended right 	48"	60"	1"	AW1 C4860 D ()	1,178.
	48"	72"	1"	AW1 C4872 D ()	1,359.
	48"	84"	1"	AW1 C4884 D ()	1,540.
24"D left/30"D right corner worksurfaces, extended right 	42"	60"	1"	AW1 C4260 R ()	1,088.
	42"	72"	1"	AW1 C4272 R ()	1,268.
	42"	84"	1"	AW1 C4284 R ()	1,450.
	48"	60"	1"	AW1 C4860 R ()	1,178.
	48"	72"	1"	AW1 C4872 R ()	1,359.
	48"	84"	1"	AW1 C4884 R ()	1,540.
30"D left/24"D right corner worksurfaces, extended right	42"	60"	1"	AW1 C4260 L ()	1,088.
	42"	72"	1"	AW1 C4272 L ()	1,268.
	42"	84"	1"	AW1 C4284 L ()	1,450.
	48"	60"	1"	AW1 C4860 L ()	1,178.
	48"	72"	1"	AW1 C4872 L ()	1,359.
	48"	84"	1"	AW1 C4884 L ()	1,540.

Order Code

Example:	AW1 C3660S 117
AW1	Worksurface
C	Corner
36	Width left
60	Width right
S	Depth left and right
117	Top finish

Specification Information

Dimensions shown in "w" column are nominal width of left back edge.
Dimensions shown in "d" column are nominal width of right back edge.

Worksurface depths:

S	24"D both sides
L	30"D left/24"D right
R	24"D left/30"D right
D	30"D both sides

Specify top finish.

Worksurface edges are trim grey.

Veneer finishes for Currents worksurfaces are available through Custom Product Development.

Application Notes



Universal worksurfaces are interchangeable with Currents desks. Specify worksurface supports separately.

Corner worksurfaces may be supported by two cantilever brackets on one back edge in combination with C-leg or pedestal support on other end.

Universal extended corner worksurfaces include a steel stiffener on both back edges that doubles as a horizontal cable manager.

P-shape

1 3/4" wire drop




description	w	d	h	pattern no.	lam.
P-shape surfaces, extended left 	75"	48"	1"	AW1 P7548 S ()	\$1,450.
	87"	48"	1"	AW1 P8748 S ()	1,632.
P-shape surfaces, extended right 	48"	75"	1"	AW1 P4875 S ()	1,450.
	48"	87"	1"	AW1 P4887 S ()	1,632.

Order Code	Specification Information	Application Notes
Example: AW1 P7548S 117		
AW1 Worksurface	Dimensions shown in "w" column are nominal width of left back edge.	P-shape worksurfaces may be cantilevered from service wall along 48" edge, and supported by 24"D C-leg at conference end. Specify two cantilever brackets and C-leg separately.
P P-shape	Dimensions shown in "d" column are nominal width of right back edge.	
75 Width left		
48 Width right		
S Depth of return		All P-shape worksurfaces correspond to a 24"D adjacent straight or corner worksurface.
117 Top finish	Specify top finish.	Universal P-shape worksurfaces include a steel stiffener on both back edges that doubles as a horizontal cable manager.

Worksurfaces, universal
shared and arc-shape
1 3/4" wire drop

Currents

description	w	d	h	pattern no.	lam.
36"D shared worksurface	36"	72"	1"	AW1 R7236 ()	\$1,196.
36"D left, 24"D right arc shape surface	60"	34 1/4"	1"	AW1 A60L ()	1,000.
	72"	34 1/4"	1"	AW1 A72L ()	1,196.
36"D right, 24"D left arc shape surface	60"	34 1/4"	1"	AW1 A60R ()	1,000.
	72"	34 1/4"	1"	AW1 A72R ()	1,196.




Order Code	Specification Information	Application Notes
Example: AW1 P7548S 117	Specify top finish.	Worksurface edges are trim grey.
AW1 Worksurface	Veneer finishes for Currents worksurfaces are available through Custom Product Development.	36"D shared worksurface requires two straight legs and two end support brackets, or four straight legs. Arc shape worksurfaces require 18"D floorstanding pedestal or 24"D C-leg at 24"D end and two end support brackets or straight legs at 36"D end. Universal shared and arc-shape worksurfaces include a steel stiffener that doubles as a horizontal cable manager.
P P-shape		
75 Width left		
48 Width right		
S Depth of return		
117 Top finish		

Currents Stiffeners

stiffeners

Currents

description	type	w	d	h	pattern no.	price
 Stiffener for worksurfaces	36"	20"	1 1/2"	1"	AWM1 S36	\$76.
	42"	26"	1 1/2"	1"	AWM1 S42	81.
	48"	32"	1 1/2"	1"	AWM1 S48	83.
	60"	44"	1 1/2"	1"	AWM1 S60	85.
	66"	50"	1 1/2"	1"	AWM1 S66	89.
	72"	56"	1 1/2"	1"	AWM1 S72	93.
	78"	62"	1 1/2"	1"	AWM1 S78	98.
	84"	68"	1 1/2"	1"	AWM1 S84	100.



Worksurfaces

Order Code	Specification Information	Application Notes
<p>Example: AWM1 S36</p> <p>AWM1 Stiffener</p> <p>S Straight</p> <p>36 Application</p>	<p>Stiffeners are black painted finish.</p>	<p>Currents worksurfaces require stiffeners when the span between structural supports (end supports, cantilevers, pedestals, or C-legs) exceeds 36". Stiffener also serves as horizontal cable manager.</p> <p>Stiffener corresponds in width to straight or corner worksurface back edge.</p> <p>For 90" application span, use AWM1-S84 stiffener.</p> <p>Stiffener mounts 18" from front edge of worksurface and will interfere with mobile or floorstanding pedestals greater than 18" deep.</p> <p>To accommodate a floorstanding pedestal greater than 18" deep at one end of worksurface, specify stiffener for 12" narrower worksurface. To accommodate two floorstanding pedestals or double-wide at one end of worksurface, specify stiffener for 24" narrower worksurface.</p>

Cascade edge worksurfaces

Rectangular

Currents


description	w	d	h	pattern no.	Solid	Woodgrain
24"D Rectangular 	24"	24"	1 1/8"	ACE1R2424N	\$261.	\$299.
	30"	24"	1 1/8"	ACE1R3024N	299.	344.
	36"	24"	1 1/8"	ACE1R3624N	328.	379.
	42"	24"	1 1/8"	ACE1R4224N	379.	437.
	48"	24"	1 1/8"	ACE1R4824N	426.	490.
	54"	24"	1 1/8"	ACE1R5424N	458.	526.
	60"	24"	1 1/8"	ACE1R6024N	497.	572.
	66"	24"	1 1/8"	ACE1R6624N	537.	615.
	72"	24"	1 1/8"	ACE1R7224N	561.	645.
	78"	24"	1 1/8"	ACE1R7824N	604.	693.
	84"	24"	1 1/8"	ACE1R8424N	638.	732.
	90"	24"	1 1/8"	ACE1R9024N	719.	825.
	96"	24"	1 1/8"	ACE1R9624N	785.	902.
30"D Rectangular 	24"	30"	1 1/8"	ACE1R2430N	329.	381.
	30"	30"	1 1/8"	ACE1R3030N	371.	426.
	36"	30"	1 1/8"	ACE1R3630N	414.	475.
	42"	30"	1 1/8"	ACE1R4230N	449.	514.
	48"	30"	1 1/8"	ACE1R4830N	497.	572.
	54"	30"	1 1/8"	ACE1R5430N	562.	647.
	60"	30"	1 1/8"	ACE1R6030N	618.	710.
	66"	30"	1 1/8"	ACE1R6630N	690.	793.
	72"	30"	1 1/8"	ACE1R7230N	719.	825.
	78"	30"	1 1/8"	ACE1R7830N	766.	880.
	84"	30"	1 1/8"	ACE1R8430N	815.	937.
	90"	30"	1 1/8"	ACE1R9030N	876.	1,008.
	96"	30"	1 1/8"	ACE1R9630N	937.	1,077.

Order Code	Specification Information	Application Notes
Example: ACE1 R4824N 118 ACE1 Cascade edge worksurface R Rectangular 48 Width 24 Depth N No grommet 118 Top finish	<p><i>Specify:</i> Grommet / No grommet. Replace the "N" suffix from the pattern number with "G". Add \$20.</p> <p>Available finishes:</p> <p>Solid:</p> <p>114 Folkstone Grey 117 Soft Grey 118 Bright White 119 Pumice</p> <p>Woodgrain:</p> <p>124 Medium Cherry 125 Natural Maple 126 Natural Cherry 127 Walnut</p>	<p>Cascade Edge worksurfaces are wrapped with a 3D laminate sheet heated and pressed around an FSC-certified substrate. 3D laminate is more susceptible to denting, impact, tearing and marring than conventional high-pressure laminate and should be handled with care. Do not drag worksurfaces across any flooring surface. Treat Cascade Edge worksurfaces like veneer worksurfaces for optimum performance under normal conditions. Cascade Edge worksurfaces have a 10 year warranty on defects in workmanship and materials. This warranty does not cover damage occurring during or after installation. Cascade edge worksurfaces in solid colors utilize a non-PVC construction and are also free of any plasticizers, phthalates and lead content.</p> <p>Cascade Edge worksurfaces are not drilled for stiffeners, pedestals or brackets. Cascade Edge worksurfaces are sized for panel-based applications and may be end support from the Currents wall. 24" D straight tops may also be cantilevered from the Service Wall.</p> <p>Cascade Edge worksurfaces are not interchangeable with Currents desks surfaces and should not be used to create freestanding Currents desks. Worksurfaces are 1/16" less than nominal width and 3/8" less than nominal depth for rear wire clearance. Edge grommets are centered at rear edges of worksurface for maximum clearance of 1 3/8".</p> <p>Worksurfaces require support every 48" in width. All supporting hardware is ordered separately.</p> <p>Worksurfaces may be supported at each end by pedestals or end support "EC" brackets and cantilever brackets matching the worksurface depth. 24"D rectangular worksurfaces may also be cantilevered from the Currents service wall. Panel supported worksurfaces over 48" must be mid-span supported by cantilever brackets, specified separately.</p>

Cascade edge worksurfaces

Curvilinear corner

Currents

description	A	B	C	h	pattern no.	Solid	Woodgrain
Curvilinear corner 	36"	24"	24"	1 1/8"	ACE1L3636SSN	\$649.	\$748.
	42"	24"	24"	1 1/8"	ACE1L4242SSN	785.	902.
	42"	24"	30"	1 1/8"	ACE1L4242SDN	931.	1,069.
	42"	30"	24"	1 1/8"	ACE1L4242DSN	931.	1,069.
	48"	24"	24"	1 1/8"	ACE1L4848SSN	880.	1,013.
	48"	24"	30"	1 1/8"	ACE1L4848SDN	1,056.	1,214.
	48"	30"	24"	1 1/8"	ACE1L4848DSN	1,056.	1,214.
	48"	30"	30"	1 1/8"	ACE1L4848DDN	947.	1,088.

Order Code

Example:	ACE1 L4848SSG 114
ACE1	Cascade edge worksurface
L	Curvilinear "L" top
48	Width left
48	Width right
S	24" depth left side
S	24" depth right side
G	Grommets
114	Top finish

Specification Information

Specify:
Grommet / No grommet.
Replace the "N" suffix from the pattern number with "G". Add \$40.

Available finishes:

Solid:	
114	Folkstone Grey
117	Soft Grey
118	Bright White
119	Pumice

Woodgrain:

124	Medium Cherry
125	Natural Maple
126	Natural Cherry
127	Walnut

Note: When wood grain or brushed finishes are specified on Cascade corner worksurfaces with two "A" sides of equal length that do not exceed 42" you must select one of three grain direction options. Insert the desired grain direction "L"= Left hand, "R"= Right hand or "D"= Diagonal after the worksurface finish code to indicate the appropriate grain direction. When the "D" option is selected please add \$25.00 to the worksurface list price. 48" Cascade corners are not available with a diagonal grain option.

Application Notes

Cascade Edge worksurfaces are wrapped with a 3D laminate sheet heated and pressed around an FSC-certified substrate. 3D laminate is more susceptible to denting, impact, tearing and marring than conventional high-pressure laminate and should be handled with care. Do not drag worksurfaces across any flooring surface. Treat Cascade Edge worksurfaces like veneer worksurfaces for optimum performance under normal conditions. Cascade Edge worksurfaces have a 10 year warranty on defects in workmanship and materials. This warranty does not cover damage occurring during or after installation. Cascade edge worksurfaces in solid colors utilize a non-PVC construction and are also free of any plasticizers, phthalates and lead content.

Cascade Edge worksurfaces are not drilled for stiffeners, pedestals or brackets. Cascade Edge worksurfaces are sized for panel-based applications and may be supported end support from the Currents wall. 24" D straight tops may also be cantilevered from the Service Wall.

Cascade Edge worksurfaces are not interchangeable with Currents desks surfaces and should not be used to create freestanding Currents desks. Worksurfaces are 1/16" less than nominal width and 3/8" less than nominal depth for rear wire clearance. Edge grommets are centered at rear edges of worksurface for maximum clearance of 1 3/8".

Worksurfaces require support every 48" in width. All supporting hardware is ordered separately.


Worksurfaces may be supported by left or right hand 18" cantilever bracket at the rear corner, and cantilever bridging brackets on each side edge. Worksurfaces may also be end supported or cantilever-bracket supported from Currents wall. Extended side of blended L may also be supported with Currents C-legs.

Panel supported worksurfaces over 48" must be mid-span supported by cantilever brackets, specified separately.

Cascade edge worksurfaces

Blended “L”

Currents


description	B	C	A	D	h	pattern no.	Solid	Woodgrain
	42"	60"	24"	24"	1 1/8"	ACE1L4260SSN	\$1,077.	\$1,238.
	42"	66"	24"	24"	1 1/8"	ACE1L4266SSN	1,105.	1,272.
	42"	72"	24"	24"	1 1/8"	ACE1L4272SSN	1,145.	1,320.
	42"	78"	24"	24"	1 1/8"	ACE1L4278SSN	1,161.	1,332.
	48"	60"	24"	24"	1 1/8"	ACE1L4860SSN	1,090.	1,253.
	48"	60"	24"	30"	1 1/8"	ACE1L4860SDN	1,069.	1,231.
	48"	60"	30"	24"	1 1/8"	ACE1L4860DSN	1,069.	1,231.
	48"	66"	24"	24"	1 1/8"	ACE1L4866SSN	1,130.	1,298.
	48"	66"	24"	30"	1 1/8"	ACE1L4866SDN	1,125.	1,295.
	48"	66"	30"	24"	1 1/8"	ACE1L4866DSN	1,125.	1,295.
	48"	72"	24"	24"	1 1/8"	ACE1L4872SSN	1,171.	1,346.
	48"	72"	24"	30"	1 1/8"	ACE1L4872SDN	1,177.	1,356.
	48"	72"	30"	24"	1 1/8"	ACE1L4872DSN	1,177.	1,356.
	48"	78"	24"	24"	1 1/8"	ACE1L4878SSN	1,291.	1,485.
	48"	84"	24"	24"	1 1/8"	ACE1L4884SSN	1,451.	1,670.
	60"	42"	24"	24"	1 1/8"	ACE1L6042SSN	1,077.	1,238.
	60"	48"	24"	24"	1 1/8"	ACE1L6048SSN	1,090.	1,253.

Order Code	Specification Information	Application Notes	
Example: ACE1 L4260SSN 114	<i>Specify:</i> Grommet / No grommet. Replace the “N” suffix from the pattern number with “G”. Add \$40.	Cascade Edge worksurfaces are wrapped with a 3D laminate sheet heated and pressed around an FSC-certified substrate. 3D laminate is more susceptible to denting, impact, tearing and marring than conventional high-pressure laminate and should be handled with care. Do not drag worksurfaces across any flooring surface. Treat Cascade Edge worksurfaces like veneer worksurfaces for optimum performance under normal conditions. Cascade Edge worksurfaces have a 10 year warranty on defects in workmanship and materials. This warranty does not cover damage occurring during or after installation. Cascade edge worksurfaces in solid colors utilize a non-PVC construction and are also free of any plasticizers, phthalates and lead content.	Cascade Edge worksurfaces are not interchangeable with Currents desks surfaces and should not be used to create freestanding Currents desks. Worksurfaces are 1/16” less than nominal width and 3/8” less than nominal depth for rear wire clearance. Edge grommets are centered at rear edges of worksurface for maximum clearance of 1 3/8”.
ACE1	Cascade edge worksurface		
L	Blended “L” top	Available finishes:	
42	Width		
60	Depth	Solid:	
S	24”d, left side	114 Folkstone Grey	
S	24”d, right side	117 Soft Grey	
N	No Grommet	118 Bright White	
114	Top finish	119 Pumice	
		Woodgrain:	
		124 Medium Cherry	
		125 Natural Maple	
		126 Natural Cherry	
		127 Walnut	
			Worksurfaces require support every 48” in width. All supporting hardware is ordered separately.
			Worksurfaces may be supported by left or right hand 18” cantilever bracket at the rear corner, and cantilever bridging brackets on each side edge. Worksurfaces may also be end supported or cantilever-bracket supported from Currents wall. Extended side of blended L may also be supported with Currents C-legs. Panel supported worksurfaces over 48” must be mid-span supported by cantilever brackets, specified separately.
			Cascade Edge worksurfaces are not drilled for stiffeners, pedestals or brackets. Cascade Edge worksurfaces are sized for panel-based applications and may be end support from the Currents wall. 24” D straight tops may also be cantilevered from the Service Wall.

Cascade edge worksurfaces

Blended “L”

Currents

description	B	C	A	D	h	pattern no.	Solid	Woodgrain
	60"	48"	24"	30"	1 1/8"	ACE1L6048SDN	\$1,069.	\$1,231.
	60"	48"	30"	24"	1 1/8"	ACE1L6048DSN	1,069.	1,231.
	66"	42"	24"	24"	1 1/8"	ACE1L6642SSN	1,105.	1,272.
	66"	48"	24"	24"	1 1/8"	ACE1L6648SSN	1,130.	1,298.
	66"	48"	24"	30"	1 1/8"	ACE1L6648SDN	1,125.	1,295.
	66"	48"	30"	24"	1 1/8"	ACE1L6648DSN	1,125.	1,295.
	72"	42"	24"	24"	1 1/8"	ACE1L7242SSN	1,145.	1,320.
	72"	48"	24"	24"	1 1/8"	ACE1L7248SSN	1,171.	1,346.
	72"	48"	24"	30"	1 1/8"	ACE1L7248SDN	1,177.	1,356.
	72"	48"	30"	24"	1 1/8"	ACE1L7248DSN	1,177.	1,356.
	78"	42"	24"	24"	1 1/8"	ACE1L7842SSN	1,161.	1,332.
	78"	48"	24"	24"	1 1/8"	ACE1L7848SSN	1,291.	1,485.
	84"	48"	24"	24"	1 1/8"	ACE1L8448SSN	1,451.	1,670.






Worksurfaces

Order Code	Specification Information	Application Notes	
Example: ACE1 L4260SSN 114	<i>Specify:</i> Grommet / No grommet. Replace the “N” suffix from the pattern number with “G”. Add \$40.	Cascade Edge worksurfaces are wrapped with a 3D laminate sheet heated and pressed around an FSC-certified substrate. 3D laminate is more susceptible to denting, impact, tearing and marring than conventional high-pressure laminate and should be handled with care. Do not drag worksurfaces across any flooring surface. Treat Cascade Edge worksurfaces like veneer worksurfaces for optimum performance under normal conditions. Cascade Edge worksurfaces have a 10 year warranty on defects in workmanship and materials. This warranty does not cover damage occurring during or after installation. Cascade edge worksurfaces in solid colors utilize a non-PVC construction and are also free of any plasticizers, phthalates and lead content.	Cascade Edge worksurfaces are not interchangeable with Currents desks surfaces and should not be used to create freestanding Currents desks. Worksurfaces are 1/16” less than nominal width and 3/8” less than nominal depth for rear wire clearance. Edge grommets are centered at rear edges of worksurface for maximum clearance of 1 3/8”.
ACE1	Cascade edge worksurface		
L	Blended “L” top	Available finishes:	Worksurfaces require support every 48” in width. All supporting hardware is ordered separately.
42	Width	Solid:	Worksurfaces may be supported by left or right hand 18” cantilever bracket at the rear corner, and cantilever bridging brackets on each side edge. Worksurfaces may also be end supported or cantilever-bracket supported from Currents wall. Extended side of blended L may also be supported with Currents C-legs. Panel supported worksurfaces over 48” must be mid-span supported by cantilever brackets, specified separately.
60	Depth	114 Folkstone Grey	
S	24”d, left side	117 Soft Grey	
S	24”d, right side	118 Bright White	
N	No Grommet	119 Pumice	
114	Top finish	Woodgrain:	
		124 Medium Cherry	
		125 Natural Maple	
		126 Natural Cherry	
		127 Walnut	
		Cascade Edge worksurfaces are not drilled for stiffeners, pedestals or brackets. Cascade Edge worksurfaces are sized for panel-based applications and may be end support from the Currents wall. 24” D straight tops may also be cantilevered from the Service Wall.	

Cascade edge worksurfaces

Half round and corner round

Currents



description	w	d	h	pattern no.	Solid	Woodgrain
 Half Round	48"	18"	1 1/8"	ACE1H4818	\$561.	\$645.
	49 1/2"	18"	1 1/8"	ACE1H4818P	561.	645.
	60"	24"	1 1/8"	ACE1H6024	771.	889.
	61 1/2"	24"	1 1/8"	ACE1H6024P	771.	889.
 LH Corner Round	24"	24"	1 1/8"	ACE1CR24L	299.	344.
 RH Corner Round	24"	24"	1 1/8"	ACE1CR24R	299.	344.
 Notched Corner Round	24"	24"	1 1/8"	ACE1CR24N	299.	344.
 Sample	12"	12"	1 1/8"	ACE1R1212G	161.	186.

Order Code	Specification Information	Application Information
Example: ACE1 H4818P 117 ACE1 Cascade edge worksurface H Half round 48 Width 18 Depth P Notched for panel 117 Top finish	Available finishes: Solid: 114 Folkstone Grey 117 Soft Grey 118 Bright White 119 Pumice Woodgrain: 124 Medium Cherry 125 Natural Maple 126 Natural Cherry 127 Walnut	<p>Cascade Edge worksurfaces are wrapped with a 3D laminate sheet heated and pressed around an FSC-certified substrate. 3D laminate is more susceptible to denting, impact, tearing and marring than conventional high-pressure laminate and should be handled with care. Do not drag worksurfaces across any flooring surface. Treat Cascade Edge worksurfaces like veneer worksurfaces for optimum performance under normal conditions. Cascade Edge worksurfaces have a 10 year warranty on defects in workmanship and materials. This warranty does not cover damage occurring during or after installation. Cascade edge worksurfaces in solid colors utilize a non-PVC construction and are also free of any plasticizers, phthalates and lead content.</p> <p>Cascade Edge worksurfaces are not drilled for stiffeners, pedestals or brackets. Cascade Edge worksurfaces are sized for panel-based applications and may be end support from the Currents wall. 24" D straight tops may also be cantilevered from the Service Wall. Cascade Edge worksurfaces are not interchangeable with Currents desks surfaces and should not be used to create freestanding Currents desks.</p> <p>Worksurfaces are 1/16" less than nominal width and 3/8" less than nominal depth for rear wire clearance. Edge grommets are centered at rear edges of worksurface for maximum clearance of 1 3/8".</p> <p>Worksurfaces require support every 48" in width. All supporting hardware is ordered separately.</p> <p><i>Half round</i> Half round worksurfaces may be supported by cantilever bridging brackets in conjunction with a rounded end support column.</p> <p><i>Corner round</i> Notched corner round worksurfaces are supported by cantilever bridging brackets on both side edges. End run Left- and Right-hand corner round worksurfaces are supported by a combination of an "EC" end bracket along the panel edge and a cantilever bridging bracket to the adjacent worksurface side edge.</p>

Cascade edge worksurfaces

Wave end

Currents

description	1	2	3	A	B	h	pattern no.	Solid	Woodgrain
Wave End, LH 	36"	24"	30"	15"	3"	1 1/8"	ACE1W363024N	\$698.	\$802.
	42"	24"	30"	15"	9"	1 1/8"	ACE1W423024N	733.	844.
	48"	24"	30"	15"	15"	1 1/8"	ACE1W483024N	786.	904.
	72"	24"	30"	23 1/2"	30 1/2"	1 1/8"	ACE1W723024N	1,000.	1,148.
Wave End, RH 	36"	30"	24"	3"	15"	1 1/8"	ACE1W362430N	698.	802.
	42"	30"	24"	9"	15"	1 1/8"	ACE1W422430N	733.	844.
	48"	30"	24"	15"	15"	1 1/8"	ACE1W482430N	786.	904.
	72"	30"	24"	23 1/2"	30 1/2"	1 1/8"	ACE1W722430N	1,000.	1,148.

Order Code	Specification Information	Application Notes
Example: ACE1W483024N 118		
ACE1	Cascade edge worksurface	Cascade Edge worksurfaces are wrapped with a 3D laminate sheet heated and pressed around an FSC-certified substrate. 3D laminate is more susceptible to denting, impact, tearing and marring than conventional high-pressure laminate and should be handled with care. Do not drag worksurfaces across any flooring surface. Treat Cascade Edge worksurfaces like veneer worksurfaces for optimum performance under normal conditions. Cascade Edge worksurfaces have a 10 year warranty on defects in workmanship and materials. This warranty does not cover damage occurring during or after installation. Cascade edge worksurfaces in solid colors utilize a non-PVC construction and are also free of any plasticizers, phthalates and lead content.
W	Wave end	
48	Width	
30	Depth, right side	
24	Depth, left side	
N	No grommet	
118	Top finish	
	<i>Specify:</i> Grommet / No grommet. Replace the “N” suffix from the pattern number with “G”. Add \$20.	
	Available finishes: Solid:	
	114 Folkstone Grey	
	117 Soft Grey	
	118 Bright White	
	119 Pumice	
	Woodgrain:	Cascade Edge worksurfaces are not interchangeable with Currents desks surfaces and should not be used to create freestanding Currents desks. Worksurfaces are 1/16” less than nominal width and 3/8” less than nominal depth for rear wire clearance. Edge grommets are centered at rear edge of worksurface for maximum clearance of 1 3/8”.
	124 Medium Cherry	
	125 Natural Maple	
	126 Natural Cherry	
	127 Walnut	
		Worksurfaces require support every 48” in width. All supporting hardware is ordered separately.
		Worksurfaces may be supported at each end by pedestals or end support “EC” brackets and cantilever brackets matching the worksurface depth. Use cantilever bridging bracket to join to adjacent worksurface. Panel supported worksurfaces over 48” must be mid-span supported by cantilever brackets, specified separately.
		Cascade Edge worksurfaces are not drilled for stiffeners, pedestals or brackets. Cascade Edge worksurfaces are sized for panel-based applications and may be end support from the Currents wall. 24” D straight tops may also be cantilevered from the Service Wall.

description	w	d	h	pattern no.	L
Currents	16"	16"	1"	CSAMP1616 ()	\$109.
Original Upstart	16"	16"	1"	USAMP1616 ()()	109.

Order Code

Specification Information

Example:	CSAMP1616 118
C	Currents
SAMP	Worksurface Sample
16	Width
16	Depth
118	Top finish

Specify:
 Top finish for Currents and Original
 Upstart worksurface samples.


Veneer finishes for Currents
 worksurfaces are available through
 Custom Product Development.

Worksurface supports

Service Wall and Fence-Mounted

Currents

description	type	w	d	h	pattern no.	paint
Adjustable cantilever bracket (up to 24"D)		3"	20"	23-33"	AB1 AC24 ()	\$259.




Adjustable cantilever bridging bracket		3"	20"	23-33"	AB1-ABC24()	336.
--	--	----	-----	--------	---------------------	------

Fixed end support bracket		3"	6"	27"	AB1 FE ()	166.
---------------------------	--	----	----	-----	-------------------	------




Adjustable end support bracket		3"	6"	23-33"	AB2 AE ()	208.
--------------------------------	--	----	----	--------	-------------------	------



Compact fixed end support bracket	for 28"h worksurface		6"	27"	AB2 FE27 ()	176.
	for 29 ⁵ / ₈ " h worksurface		6"	28"	AB2 FE28 ()	176.







Fence end bracket kit					AB1FAE ()	256.
-----------------------	--	--	--	--	-------------------	------



Order Code	Specification Information	Application Notes
Example: AB1 AC24 117	<i>Specify painted finishes for support column, C-leg, and brackets.</i>	Specify worksurface cantilever and end support brackets to attach worksurfaces to Service Walls.
AB1 Bracket		
AC Type	Fence end bracket kit includes a left and a right handed bracket.	Adjustable bridging cantilever supports adjacent 48"W straight or corner worksurfaces.
24 Depth		End support brackets adjust 23"-33"H (24" to 34" top height). Fixed height brackets support worksurface at 28"H and 29 ⁵ / ₈ " H.
117 Finish	<i>Specify paint finish for end bracket.</i>	Fence end brackets attach to Fence to support one end of rectilinear or one back edge of a corner worksurface when the other ends are properly supported by legs, storage or panel brackets.
		Fence end brackets support the underside of the worksurface in 1" increments from 26" to 28" (27" to 29" top height).
		Adjustable height cantilever and bridging cantilever brackets support underside of worksurface in 1" increments from 23" to 33"H (24" to 34" top height).

Worksurface supports freestanding

Currents


description	type	application	w	d	h	pattern no.	paint
	Adjustable		2"	4"	23-29"	AB1 I27A(G/C) ()	\$473.
	Fixed		2"	4"	27"	AB1 I27F(G/C) ()	243.
	Low		2"	4"	25"	AB1 I25(G/C) ()	243.
	24"D	Left	2"	21"	23-29"	AB1 CL24L ()()	524.
		Right	2"	21"	23-29"	AB1 CL24R ()()	524.
	30"D	Left	2"	27"	23-29"	AB1 CL30L ()()	575.
		Right	2"	27"	23-29"	AB1 CL30R ()()	575.
	24"D	Left	2"	21"	27"	AB1 CLF24L ()()	437.
		Right	2"	21"	27"	AB1 CLF24R ()()	437.
	30"D	Left	2"	27"	27"	AB1 CLF30L ()()	479.
		Right	2"	27"	27"	AB1 CLF30R ()()	479.
	Corner worksurfaces		4"	4"	23-29"	AB1 VL ()()	437.

Order Code	Specification Information	Application Notes	
Example: AB1 CL24L 612 G	<i>Specify painted finishes for support column, C-leg, and brackets.</i>	Specify two straight legs under shared worksurface. Straight legs are fixed at 27"H (28" top height) or adjustable 23"-29" (24"-30" top height).	Straight legs may not be used with Currents universal worksurfaces to create freestanding tables.
AB1 Support			
CL C-leg	<i>C-Leg casters/glides:</i>	C-legs support one end of any corresponding depth Currents worksurface. Corner legs support only the back corner of a Currents corner worksurface. Specify C-legs for side edges of Currents corner and extended corner worksurfaces.	
24 Depth	C Rear casters/front glides		
L Left	G All glides	Adjustable C-legs and corner legs are adjustable in height to support underside of worksurface at 1" increments from 23" to 29" (24" to 30" Currents top height). Fixed height C-legs support desk at 28"H. Fixed height C-legs do not accept service beams.	
612 Finish	Casters/glides combination has no levelling. All-glides version provides 1 3/4" levelling range.		
G Glides			

Pedestal accessories
cushion
fabric

Currents

Description	type	w	d	pattern no.	A	COM B	C	D	E	F	G	H	I
Cushion	Deep	15"	23"	AS1 DPAD ()	\$287.	\$321.	\$377.	\$394.	\$433.	\$470.	\$520.	\$574.	\$594.
	Standard	15"	17"	AS1 SPAD ()	233.	268.	306.	321.	343.	377.	411.	470.	485.




Order Code	Specification Information	Application Notes
Example: AS1 SPAD		
AS1 Pedestal	There is a \$79 upcharge on CAL133 backing on the cushion.	Pedestal cushions are for use on Currents open top mobile pedestals as well as on open top mobile pedestals in other Knoll systems lines.
S Depth	Pedestal cushions are upholstered (from the front to the back of the pedestal) with the fabric direction matching the textile sample.	
PAD Cushion		
		For Customers Own Material (COM) applications, specify .75 yards of fabric for 17 inch deep mobile pedestal seat cushions, and .90 yards for 23 inch deep seat cushion.

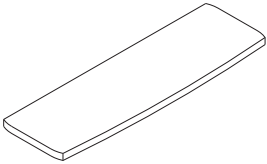
Pedestal accessories
cushion
leather


Currents

Description	type	w	d	pattern no.	COL U	V	W	X	Y
Cushion	Deep	15"	23"	AS1 DPAD ()	\$574.	\$984.	\$842.	\$882.	\$931.
	Standard	15"	17"	AS1 SPAD ()	449.	538.	663.	684.	718.



Order Code	Specification Information	Application Notes
Example: AS1 SPAD		
AS1 Pedestal	There is a \$108 upcharge for perforated leather.	Pedestal cushions are for use on Currents open top mobile pedestals as well as on open top mobile pedestals in other Knoll systems lines.
S Depth		
PAD Cushion		
		For Customers Own Leather (COL) applications, specify 11.5 sq. feet of leather for 17 inch deep mobile pedestal seat cushions, and 14.5 sq. feet for 23 inch deep seat cushion.


description	w	d	h	pattern no.	lam.	paint
Counter surface 	36"	12"	1"	AW1 CS3612 ()	\$328.	
	48"	12"	1"	AW1 CS4812 ()	366.	
	60"	12"	1"	AW1 CS6012 ()	402.	
	72"	12"	1"	AW1 CS7212 ()	441.	
Counter surface bracket kit				AB1 CS ()		328.



Desks

*pin-set adjustable
extended left*

Currents


description	w (l)	w (r)	h	pattern no.	lam.
 24"D both sides corner desk, extended left	60"	36"	24-30"	AD C53 SF () ()	\$2,521.
	60"	48"	24-30"	AD C54 SF () ()	2,709.
	72"	36"	24-30"	AD C63 SF () ()	2,709.
	72"	48"	24-30"	AD C64 SF () ()	2,893.
	84"	48"	24-30"	AD C74 SF () ()	3,081.
30"D left/24"D right corner desk, extended left	60"	48"	24-30"	AD C54 LF () ()	2,855.
	72"	48"	24-30"	AD C64 LF () ()	3,042.
	84"	48"	24-30"	AD C74 LF () ()	3,225.
30"D both sides corner desk, extended left	60"	48"	24-30"	AD C54 DF () ()	3,005.
	72"	48"	24-30"	AD C64 DF () ()	3,192.
	84"	48"	24-30"	AD C74 DF () ()	3,374.

Order Code	Specification Information	Application Notes
Example: AD C64 LF 117 117 G	<i>Specify desk shape:</i>	Desks incorporate universal worksurface and adjustable C legs. Pin-set desk surface can be set at installation from 24" - 30" high, in 1" increments.
AD Desk	C Corner	
C Shape	<i>Width left/width right:</i>	Integral cable tray under worksurface and channels in legs provide basic lay-in wire management.
6 Width left	3 36"	
4 Width right	4 48"	Extended corner desks provide computer corner and adjacent work area in one unit. Nominal worksurface depths include 1 3/4" cable/connector space along back edges. Clearance under worksurfaces (for pedestals, Backpack or other accessories) is 18".
L Depth (30"D left)	5 60"	
F Base type	6 72"	Desks may be specified with fixed front glides and rear casters or 1 3/4" levelling glides. Casters and glides are interchangeable in the field.
117 Desktop finish	7 84"	
117 Desk base finish	<i>Worksurface depth:</i>	Desks accept clamp-on workshelves and privacy screens.
G Glides	S 24"D both sides	
	L 30"D left, 24"D right	Currents C-Legs mount with machine screws into metal inserts on the underside of Currents worksurfaces.
	R 30"D right, 24"D left	
	D 30"D both sides	
	<i>Base type:</i>	
	F Manually adjustable	
	<i>Specify desk top and base finish.</i>	
	Veneer finishes for desks are available through Custom Product Development.	

Desks

*pin-set adjustable
extended right*


Currents

description	w(l)	w(r)	h	pattern no.	lam.
 24"D both sides corner desk, extended right	36"	60"	24-30"	AD C35 SF () ()	\$2,521.
	36"	72"	24-30"	AD C36 SF () ()	2,709.
	48"	60"	24-30"	AD C45 SF () ()	2,709.
	48"	72"	24-30"	AD C46 SF () ()	2,893.
	48"	84"	24-30"	AD C47 SF () ()	3,081.
30"D right/24"D left corner desk, extended right	48"	60"	24-30"	AD C45 RF () ()	2,855.
	48"	72"	24-30"	AD C46 RF () ()	3,042.
	48"	84"	24-30"	AD C47 RF () ()	3,225.
30"D both sides	48"	60"	24-30"	AD C45 DF () ()	3,005.
	48"	72"	24-30"	AD C46 DF () ()	3,192.
	48"	84"	24-30"	AD C47 DF () ()	3,374.

Order Code	Specification Information	Application Notes
Example: AD C46 SF 117 117 G	<i>Specify desk shape:</i>	Desks incorporate universal worksurface and adjustable C legs. Pin-set desk surface can be set at installation from 24" - 30" high, in 1" increments.
AD Desk	C Corner	
C Shape	<i>Width left/width right:</i>	Integral cable tray under worksurface and channels in legs provide basic lay-in wire management.
4 Width left	3 36"	
6 Width right	4 48"	Extended corner desks provide computer corner and adjacent work area in one unit. Nominal worksurface depths include 1 3/4" cable/connector space along back edges. Clearance under worksurfaces (for pedestals, BackPack or other accessories) is 18".
S Depth (24" both sides)	5 60"	
F Base type	6 72"	Desks may be specified with fixed front glides and rear casters or 1 3/4" levelling glides. Casters and glides are interchangeable in the field.
117 Desktop finish	7 84"	
117 Desk base finish	<i>Worksurface depth:</i>	Desks accept clamp-on workshelves and privacy screens.
G Glides	S 24"D both sides	
	L 30"D left, 24"D right	Currents C-Legs mount with machine screws into metal inserts on the underside of Currents worksurfaces.
	R 30"D right, 24"D left	
	D 30"D both sides	
	<i>Base type:</i>	
	F Manually adjustable	
	<i>Specify desk top and base finish.</i>	
	Veneer finishes for desks are available through Custom Product Development.	

Desks
pin-set adjustable
corner desk

Currents


description	w(l)	w(r)	h	pattern number	lam.
 24"D both sides corner desk	42"	42"	24-30"	AD C4242 SF () ()	\$2,425.
	48"	48"	24-30"	AD C44 SF () ()	2,521.
	60"	60"	24-30"	AD C55 SF () ()	2,801.
30"D left/24"D right corner desk	42"	42"	24-30"	AD C4242 LF () ()	2,482.
	48"	48"	24-30"	AD C44 LF () ()	2,574.
	60"	60"	24-30"	AD C55 LF () ()	2,855.
24"D left/30"D right corner desk	42"	42"	24-30"	AD C4242 RF () ()	2,482.
	48"	48"	24-30"	AD C44 RF () ()	2,574.
	60"	60"	24-30"	AD C55 RF () ()	2,855.
30"D both sides corner desk	42"	42"	24-30"	AD C4242 DF () ()	2,538.
	48"	48"	24-30"	AD C44 DF () ()	2,633.
	60"	60"	24-30"	AD C55 DF () ()	2,909.

Order Code	Specification Information	Application Notes
Example: AD C44 LF 117 117 G	<i>Specify desk shape:</i>	Desks incorporate universal worksurface and adjustable C legs. Pin-set desk surface can be set at installation from 24" - 30" high, in 1" increments.
AD Desk	C Corner	
C Shape	<i>Width left/width right:</i>	
4 Width left	4 48"	Worksurface edges are trim grey. Clear Maple not available on 60"W x 60"D corner desks.
4 Width right	5 60"	
L Depth (30"D left)	<i>Worksurface depth:</i>	
F Base type	S 24"D both sides	Corner desks provide up to 45" diagonal depth for large monitors, keyboard and mouse. Nominal worksurface depths include 1 3/4" cable/connector space along back edge. Clearance under worksurfaces (for pedestals, Backpack or other accessories) is 18".
117 Desktop finish	L 30"D left, 24"D right	
117 Desk base finish	R 30"D right, 24"D left	
G Glides	D 30"D both sides	Desks may be specified with fixed front glides and rear casters or 1 3/4" levelling glides. Casters and glides are interchangeable in the field.
	<i>Base type:</i>	
	F Manually adjustable	
	<i>Specify desk top and base finish.</i>	Desks accept clamp-on workshelves and privacy screens.
	Veneer finishes for desks are available through Custom Product Development.	
		Currents C-Legs mount with machine screws into metal inserts on the underside of Currents worksurfaces.

Desks

pin-set adjustable straight desk

Currents

description	w(l)	w(r)	h	pattern number	lam.
 24"D straight desk, curved front	36"	24"	24-30"	AD S36 SF () () ()	\$1,568.
	42"	24"	24-30"	AD S42 SF () () ()	1,607.
	48"	24"	24-30"	AD S48 SF () () ()	1,640.
	60"	24"	24-30"	AD S60 SF () () ()	1,718.
	72"	24"	24-30"	AD S72 SF () () ()	1,790.
	84"	24"	24-30"	AD S84 SF () () ()	1,864.
30"D straight desk, curved front	36"	30"	24-30"	AD S36 DF () () ()	1,733.
	42"	30"	24-30"	AD S42 DF () () ()	1,773.
	48"	30"	24-30"	AD S48 DF () () ()	1,810.
	60"	30"	24-30"	AD S60 DF () () ()	1,904.
	72"	30"	24-30"	AD S72 DF () () ()	2,014.

Order Code	Specification Information	Application Notes
Example: AD S48 DF 117 117 G	<i>Specify desk shape:</i>	<i>Specify glides/casters:</i>
AD Desk	S Straight	C Rear casters
S Shape		G Glides
48 Width	<i>Worksurface depth:</i>	Worksurface edges are trim grey.
D Depth	S 24"D both sides	
F Base type	D 30"D both sides	
117 Desktop finish	<i>Base type:</i>	
117 Desk base finish	F Manually adjustable	
G Glides	<i>Specify desk top and base finish.</i>	
	Veneer finishes for desks are available through Custom Product Development.	

Desks incorporate universal worksurface and adjustable C legs. Pin-set desk surface can be set at installation from 24" - 30" high, in 1" increments.

Straight desks have slightly curved front edges, to a maximum of 1" extra depth at the center. Nominal worksurface depths include 1 3/4" cable/connector space along back edge. Clearance under worksurfaces (for pedestals, Backpack or other accessories) is 18".

Desks may be specified with fixed front glides and rear casters or 1 3/4" levelling glides. Casters and glides are interchangeable in the field.

Desks accept clamp-on workshelves and privacy screens.


Currents C-Legs mount with machine screws into metal inserts on the underside of Currents worksurfaces.

Desks

handcrank adjustable

extended left

Currents

description	w(l)	w(r)	h	pattern no.	lam.
 24"D both sides corner desk, extended left	60"	36"	24-34"	AD C53 SH () ()	\$3,822.
	60"	48"	24-34"	AD C54 SH () ()	4,010.
	72"	36"	24-34"	AD C63 SH () ()	4,010.
	72"	48"	24-34"	AD C64 SH () ()	4,199.
	84"	48"	24-34"	AD C74 SH () ()	4,387.
30"D left/24"D right corner desk, extended left	60"	48"	24-34"	AD C54 LH () ()	4,162.
	72"	48"	24-34"	AD C64 LH () ()	4,347.
	84"	48"	24-34"	AD C74 LH () ()	4,533.
30"D both sides corner desk, extended left	60"	48"	24-34"	AD C54 DH () ()	4,162.
	72"	48"	24-34"	AD C64 DH () ()	4,347.
	84"	48"	24-34"	AD C74 DH () ()	4,533.


Order Code	Specification Information	Application Notes
Example: AD C53 SH 117 117 G	<i>Specify desk shape:</i>	<p>Handcrank desks incorporate synchronized, adjustable C legs and corner legs. Handcrank mechanism enables user to adjust worksurface from 24" - 34" high (continuous) with collapsible crank under front edge. Handcrank is located on the extended side of desks.</p> <p>Integral cable tray under worksurface and channels in legs provide basic lay-in wire management. Crossbeam stiffens legs through upper height range. Crossbeam is 4"H, 14" above floor.</p> <p>Desks may be specified with fixed front glides and rear casters or 1 3/4" levelling glides. Casters and glides are interchangeable in the field.</p> <p>Extended corner desks provide computer corner and adjacent work area in one unit. Nominal worksurface depths include 1 3/4" cable/connector clearance along back edge.</p> <p>Handcrank mechanism is rated at 300 lbs. maximum weight.</p> <p>Desks accept clamp-on workshelves and privacy screens.</p> <p>Currents C-Legs mount with machine screws into metal inserts on the underside of Currents worksurfaces.</p>
AD Desk	C Corner	
C Shape	<i>Width left, width right:</i>	
5 Width left	3 36"	
3 Width right	4 48"	
S Depth	5 60"	<p>Worksurface edges are trim grey.</p>
H Base type	6 72"	
117 Desktop finish	7 84"	
117 Base finish	<i>Worksurface depth:</i>	
G Glides	S 24"D both sides	
	L 30"D left, 24"D right	
	R 30"D right, 24"D left	
	D 30"D both sides	
	<i>Base type:</i>	
	H Handcrank adjustable	
	<i>Specify desk top and base finish.</i>	
	Veneer finishes for desks are available through Custom Product Development.	

Desks

handcrank adjustable

extended right

Currents


description	w(l)	w(r)	h	pattern no.	lam.
 24"D both sides corner desk, extended right	36"	60"	24-34"	AD C35 SH () ()	\$3,822.
	36"	72"	24-34"	AD C36 SH () ()	4,010.
	48"	60"	24-34"	AD C45 SH () ()	4,010.
	48"	72"	24-34"	AD C46 SH () ()	4,199.
	48"	84"	24-34"	AD C47 SH () ()	4,387.
30"D right/24"D left corner desk, extended left	48"	60"	24-34"	AD C45 RH () ()	4,162.
	48"	72"	24-34"	AD C46 RH () ()	4,347.
	48"	84"	24-34"	AD C47 RH () ()	4,533.
30"D both sides corner desk, extended left	48"	60"	24-34"	AD C45 DH () ()	4,162.
	48"	72"	24-34"	AD C46 DH () ()	4,347.
	48"	84"	24-34"	AD C47 DH () ()	4,533.

Order Code	Specification Information	Application Notes
Example: AD C35 SH 117 117 G	<i>Specify desk shape:</i>	<p>Handcrank desks incorporate synchronized, adjustable C legs and corner legs. Handcrank mechanism enables user to adjust worksurface from 24" - 34" high (continuous) with collapsible crank under front edge. Handcrank is located on the extended side of desks.</p> <p>Integral cable tray under worksurface and channels in legs provide basic lay-in wire management. Crossbeam stiffens legs through upper height range. Crossbeam is 4"H, 14" above floor.</p> <p>Desks may be specified with fixed front glides and rear casters or 1 3/4" levelling glides. Casters and glides are interchangeable in the field.</p> <p>Extended corner desks provide computer corner and adjacent work area in one unit. Nominal worksurface depths include 1 3/4" cable/connector clearance along back edge.</p> <p>Handcrank mechanism is rated at 300 lbs. maximum weight.</p> <p>Desks accept clamp-on workshelves and privacy screens.</p> <p>Currents C-Legs mount with machine screws into metal inserts on the underside of Currents worksurfaces.</p>
AD Desk	C Corner	
C Shape	<i>Width left, width right:</i>	
3 Width left	3 36"	
5 Width right	4 48"	
S Depth	5 60"	<p>Worksurface edges are trim grey.</p>
H Base type	6 72"	
117 Desktop finish	7 84"	
117 Base finish	<i>Worksurface depth:</i>	
G Glides	S 24"D both sides	
	L 30"D left, 24"D right	
	R 30"D right, 24"D left	
	D 30"D both sides	
	<i>Base type:</i>	
	H Handcrank adjustable	
	<i>Specify desk top and base finish.</i>	
	Veneer finishes for desks are available through Custom Product Development.	

Desks

handcrank adjustable corner desk

Currents

description	w(l)	w(r)	h	pattern no.	lam.
 24"D both sides corner desk	42"	42"	24-34"	AD C4242 SH () ()	\$3,663.
	48"	48"	24-34"	AD C44 SH () ()	3,822.
	60"	60"	24-34"	AD C55 SH () ()	4,101.
30"D left/24"D right corner desk	42"	42"	24-34"	AD C4242 LH () ()	3,715.
	48"	48"	24-34"	AD C44 LH () ()	3,877.
	60"	60"	24-34"	AD C55 LH () ()	4,162.
24"D left/30"D right corner desk	42"	42"	24-34"	AD C4242 RH () ()	3,715.
	48"	48"	24-34"	AD C44 RH () ()	3,877.
	60"	60"	24-34"	AD C55 RH () ()	4,162.
30"D both sides corner desk	48"	48"	24-34"	AD C44 DH () ()	3,938.
	60"	60"	24-34"	AD C55 DH () ()	4,219.


Order Code	Specification Information	Application Notes
Example: AD C44 SH 117 117 G	<i>Specify desk shape:</i>	Handcrank desks incorporate synchronized, adjustable C legs and corner legs. Handcrank mechanism enables user to adjust worksurface from 24" - 34" high (continuous) with collapsible crank under front edge.
AD Desk	C Corner	
C Shape		
4 Width left	<i>Width left, width right:</i>	Desks may be specified with fixed front glides and rear casters or 1 3/4" levelling glides. Casters and glides are interchangeable in the field. Integral cable tray under worksurface and channels in legs provide basic lay-in wire management.
4 Width right	4 48"	
S Depth	5 60"	
H Base type	<i>Worksurface depth:</i>	Corner desks provide up to 45" diagonal depth for large monitors, keyboard and mouse. Nominal worksurface depths include 1 3/4" cable/connector clearance along back edge.
117 Desktop finish	S 24"D both sides	
117 Base finish	L 30"D left, 24"D right	
G Glides	R 30"D right, 24"D left	Handcrank mechanism is rated at 300 lbs. maximum weight.
	D 30"D both sides	
	<i>Base type:</i>	
	H Handcrank adjustable	Desks accept clamp-on workshelves and privacy screens.
	<i>Specify desk top and base finish.</i>	
	Veneer finishes for desks are available through Custom Product Development.	

Desks

handcrank adjustable

straight desk

Currents




description	w(l)	w(r)	h	pattern no.	lam.
 24"D straight desk, curved front	36"	24"	24-34"	AD S36 SH () ()	\$2,497.
	42"	24"	24-34"	AD S42 SH () ()	2,537.
	48"	24"	24-34"	AD S48 SH () ()	2,574.
	60"	24"	24-34"	AD S60 SH () ()	2,648.
	72"	24"	24-34"	AD S72 SH () ()	2,724.
	84"	24"	24-34"	AD S84 SH () ()	2,801.
30"D straight desk, curved front	36"	30"	24-34"	AD S36 DH () ()	2,668.
	42"	30"	24-34"	AD S42 DH () ()	2,709.
	48"	30"	24-34"	AD S48 DH () ()	2,739.
	60"	30"	24-34"	AD S60 DH () ()	2,840.
	72"	30"	24-34"	AD S72 DH () ()	2,948.

Order Code	Specification Information	Application Notes
Example: AD S48 DH 117 117 G	<i>Specify desk shape:</i>	Handcrank desks incorporate synchronized, adjustable C legs and corner legs. Handcrank mechanism enables user to adjust worksurface from 24" - 34" high (continuous) with collapsible crank under front edge. Hand crank may be installed on the left or right side of any straight or symmetrical corner desk.
AD Desk	S Straight	
S Shape	<i>For straight desks specify:</i>	Worksurface edges are trim grey.
48 Width	<i>Width:</i>	
D Depth	36 36"	Desks may be specified with fixed front glides and rear casters or levelling glides with 1 3/4" travel. Integral cable tray under worksurface and channels in legs provide basic lay-in wire management.
H Base type	42 42"	
117 Desktop finish	48 48"	
117 Base finish	60 60"	
G Glides	72 72"	
	84 84"	Straight desks have slightly curved front edges, to a maximum of 1" extra depth at the center. Nominal worksurface depths include 1 3/4" cable/connector clearance along back edge.
	<i>Worksurface depth:</i>	Handcrank mechanism is rated at 300 lbs. maximum weight.
	S 24"D	
	D 30"D	Desks accept clamp-on workshelves and privacy screens.
	<i>Base type:</i>	Currents C-Legs mount with machine screws into metal inserts on the underside of Currents worksurfaces.
	H Handcrank adjustable	
	<i>Specify desk top and base finish.</i>	
	Veneer finishes for desks are available through Custom Product Development.	

Worktables

personal, tripod, wiper

Currents

description	type	w	d	h	pattern no.	lam.
	Adjustable	36"	28"	24-30"	AT1 P36A ()()	\$1,830.
	Fixed height	36"	28"	28"	AT1 P36F ()()	1,556.
	Adjustable	36"	36"	24-30"	AT1 TA ()()	2,242.
	Fixed height (low)	36"	36"	26"	AT1 TL ()()	1,556.
	Adjustable	47"	30"	24-30"	AT1 W24A ()()	2,472.
	Fixed height	47"	30"	28"	AT1 W24F ()()	1,556.

Order Code	Specification Information	Application Notes
Example: AT1 W24F 117 117 C		
AT1 Table	F Fixed height A Adjustable height	Worktables are independent, mobile tables designed for use with desks and panel-mounted worksurfaces.
W Shape		
24 Depth	<i>Specify top and base finish.</i>	Personal worktable is rounded rectangle shape, sized to fit within small workstations. Personal worktable has center column, four-star base for clear knee space support.
F Base type		
117 Desktop finish	Veneer finishes for worktables are available through Custom Product Development.	Tripod is rounded triangle shape designed to roll under Currents 48" corner desks set at 28"H.
117 Base finish		
C Casters		

Specify:

C Casters
G Glides

Fixed height tables are 28"H except Tripod, 26"H. Adjustable height worktables adjust 24"-30"H in one-inch increments. Glides adjust 1 3/4". All casters are lockable. Worktable top edge is trim grey.

Small wiper and half wiper are conference extensions for 24"D worksurfaces. Medium wiper corresponds to 30"D worksurfaces.

Wiper and half wiper tables have four legs with integral wire-manager channels.

Worktables

personal, tripod, wiper

Currents

description	type	w	d	h	pattern no.	lam.
Medium wiper	Adjustable	54"	30"	24-30"	AT1 W30A () ()	\$2,559.
	Fixed height	54"	30"	28"	AT1 W30F () ()	1,645.



Half wiper end table	Left, adjustable	33"	36"	24-30"	AT1 E24LA () ()	2,472.
	Left, fixed height	33"	36"	28"	AT1 E24LF () ()	1,556.
	Right, adjustable	33"	36"	24-30"	AT1 E24RA () ()	2,472.
	Right, fixed height	33"	36"	28"	AT1 E24RF () ()	1,556.







right

Order Code	Specification Information			Application Notes
Example: AT1 W24F 117 117 C	F	Fixed height	<i>Specify:</i> C Casters G Glides	Worktables are independent, mobile tables designed for use with desks and panel-mounted worksurfaces.
AT1	A	Adjustable height		
W				
24	<i>Specify top and base finish.</i>			Personal worktable is rounded rectangle shape, sized to fit within small workstations. Personal worktable has center column, four-star base for clear knee space support.
F	Veneer finishes for worktables are available through Custom Product Development.			
117				
117				
C				Tripod is rounded triangle shape designed to roll under Currents 48" corner desks set at 28"H.
				Small wiper and half wiper are conference extensions for 24"D worksurfaces. Medium wiper corresponds to 30"D worksurfaces.
				Wiper and half wiper tables have four legs with integral wire-manager channels.

Worktables

half-round, large wiper, round

Currents

description	type	w	d	h	pattern no.	lam.
Half round worktable 	Adjustable	50"	28"	24-30"	AT1 D50A () ()	\$2,105.
	Fixed height	50"	28"	28"	AT1 D50F () ()	1,830.
Large half round worktable 	Adjustable	62"	30"	24-30"	AT1 D62A () ()	2,743.
	Fixed height	62"	30"	28"	AT1 D62F () ()	1,830.
Large wiper end table 	Adjustable	72"	32"	24-30"	AT1 W50A () ()	2,743.
	Fixed height	72"	32"	28"	AT1 W50F () ()	1,830.
Round worktable 	Adjustable	42"		24-30"	AT1 R42A () ()	2,559.
	Adjustable	48"		24-30"	AT1 R48A () ()	2,656.
	Fixed height	42"		28"	AT1 R42F () ()	1,645.
	Fixed height	48"		28"	AT1 R48F () ()	1,738.

Order Code	Specification Information	Application Notes
Example: AT1 D50F 117 117 C		
AT1 Table	F Fixed height A Adjustable height	<i>Specify:</i> C Casters G Glides
D Shape	<i>Specify top and base finish.</i>	Worktables are independent, mobile tables designed for use with desks and panel-mounted worksurfaces.
50 Depth		
F Base type		
117 Desktop finish	Veneer finishes for worktables are available through Custom Product Development.	Half round worktable aligns with back-to-back 24"D Currents desks or worksurfaces plus a Currents screen or Knoll systems panel between. Large half round table aligns with back-to-back 30"D desks or worksurfaces. Large wiper is shared conference extension for back-to-back 24"D desks. All tables have center edge offset to clear panel end trim.
117 Base finish		
C Casters		Large half-round, round, and wiper tables have four legs with integral wire-manager channels. Half round worktable has center column, three-star base for clear knee space support.

Upstart Tables


primary worksurfaces
table desks

Currents


type	application	w	d	h	pattern no.	list price
Y-shape table desk, curved end (left hand shown)	left	72"	28-36"	25-30"	AUP Y72DCL4 () () ()	\$1,189.
	right	72"	28-36"	25-30"	AUP Y72DCR4 () () ()	1,189.




M-shape table desk, curved ends		72"	30-36"	25-30"	AUP M72DC4 () () ()	1,189.
---------------------------------	--	-----	--------	--------	-------------------------------	--------



Y-shape table desk, flat ends	left	72"	28-36"	25-30"	AUP Y72DFL4 () () ()	1,189.
	right	72"	28-36"	25-30"	AUP Y72DFR4 () () ()	1,189.



M-shape table desk, flat ends		72"	31-36"	25-30"	AUP M72DF4 () () ()	1,189.
-------------------------------	--	-----	--------	--------	-------------------------------	--------




Order Code	Specification Information	Application Notes
Example: AUP Y72DCL4 117 117 117 G	Specify top, edge and leg finishes.	Upstart Y and M shape tables combine computer support and adjacent work area in a basic table desk.
A Currents	<i>Casters/glides</i> C Casters G Glides	Curved end tops facilitate conferencing in open planning. Flat ends plan close to system panels. Overall width is the same for curved and flat end tops.
UP Upstart		Upstart tops have plastic laminate surface with continuous T-mold edge.
Y Table shape		Upstart tables have four legs with 5" adjustable leveler glides or 4" adjustable casters. Adjustment range is 25-30" for glides and 27-31" for casters.
72 Width		Adjustment range enables Upstart tables to overlap or slide under adjacent tables and worksurfaces.
D Depth		
C Curved end		
L Left hand		
4 Leg quantity		
117 Top finish		
117 Edge finish		
117 Leg finish		
G Glides		


Upstart Tables
primary worksurfaces
corner table desks

Currents

type	w	d	h	pattern no.	list price
Extended corner table desk, 90° extended left	72"	48"	25-30"	AUP C7248S5 () () ()	\$1,360.



Extended corner table desk, 90° extended right	48"	72"	25-30"	AUP C4872S5 () () ()	1,360.
--	-----	-----	--------	--------------------------------	--------



Corner table desk, 120°	48", 48"	22"	25-30"	AUP V48S5 () () ()	1,275.
-------------------------	----------	-----	--------	------------------------------	--------





Order Code	Specification Information	Application Notes
Example: AUP C7248S5 117 117 117 C	Specify top, edge and leg finishes.	Upstart extended corner and corner shape tables include worksurface stiffeners that double as horizontal cable managers. Suspended pedestal may not be used on Upstart tables.
A Currents	<i>Casters/glides</i>	Upstart extended corner and corner shape tables combine computer support and adjacent work area in a basic table desk.
UP Upstart	C Casters	Upstart tops have plastic laminate surface with continuous T-mold edge.
C Table shape	G Glides	Upstart tables have four or five legs with 5" adjustable leveler glides or 4" adjustable casters. Adjustment range is 25-30" for glides and 27-31" for casters.
72 Width, extended left		Adjustment range enables Upstart tables to overlap or slide under adjacent worksurfaces.
48 Width		Extended corner table desks and 120° corner table desk are 22" deep on each side edge.
S Depth		
4 Leg quantity		
117 Top finish		
117 Edge finish		
117 Leg finish		
C Casters		

Upstart Tables

secondary worksurfaces

Currents

type	w	d	h	pattern no.	list price
 Rectangular table desk, four legs	48"	22"	25-30"	AUP S48S4 () () ()	\$763.
	48"	28"	25-30"	AUP S48D4 () () ()	852.
	60"	28"	25-30"	AUP S60D4 () () ()	936.
	72"	28"	25-30"	AUP S72D4 () () ()	978.
	72"	36"	25-30"	AUP S72E4 () () ()	1,020.
 Rectangular return, two legs	48"	22"	25-30"	AUP S48S2 () () G	595.

Order Code	Specification Information	Application Notes
Example: AUP S72E4 117 117 117 C	Specify top, edge and leg finishes.	Upstart rectangular and rectangular return include a worksurface stiffener that doubles as a horizontal cable manager.
A Currents	<i>Casters/glides</i>	Upstart tops have plastic laminate surface with continuous T-mold edge.
UP Upstart	C Casters	Upstart tables have four or five legs with 5" adjustable leveler glides or 4" adjustable casters. Adjustment range is 25-30" for glides and 27-31" for casters.
S Table shape	G Glides	Adjustment range enables Upstart tables to overlap or slide under adjacent worksurfaces.
72 Width		Rectangular return with two legs includes flat bracket for attachment to primary worksurface at right angle.
E Depth		
4 Leg quantity		
117 Top finish		
117 Edge finish		
117 Leg finish		
C Casters		

Upstart table desks and storage

Upstart Tables

conference worksurfaces

Currents

type	w	d	h	pattern no.	list price
------	---	---	---	-------------	------------

Wiper table desk	61"	32 1/2"	25-30"	AUP W60D4 () () ()	\$936.
------------------	-----	---------	--------	------------------------------	--------



Oval table desk, four legs	66"	36"	25-30"	AUP O664 () () ()	1,189.
----------------------------	-----	-----	--------	-----------------------------	--------



Round table desk, four legs	42"		25-30"	AUP R424 () () ()	885.
-----------------------------	-----	--	--------	-----------------------------	------



Half round table desk, four legs	62"	30"	25-30"	AUP D624() () ()	936.
----------------------------------	-----	-----	--------	----------------------------	------



Tripod table, three legs	36"	36"	25-30"	AUP T363() () ()	763.
--------------------------	-----	-----	--------	----------------------------	------



Order Code	Specification Information	Application Notes
Example: AUP O664 117 117 117 G	Specify top, edge and leg finishes.	Upstart wiper, oval and half round tables include a worksurface stiffener that doubles as a horizontal cable manager.
A Currents	<i>Casters/glides</i>	Suspended pedestals may not be used on Upstart tables.
UP Upstart	C Casters	Upstart conference table desks are designed to support conference work in combination with other worktables or systems furniture.
O Table shape	G Glides	Upstart tops have plastic laminate surface with continuous T-mold edge.
66 Size		Upstart tables have four legs with 5" adjustable leveler glides or 4" adjustable casters. Adjustment range is 25-30" for glides and 27-31" for casters.
4 Leg quantity		Tops adjust in height to permit conference tops to overlap or roll under adjacent tables.
117 Top finish		Half round corresponds to back-to-back Y-shape tables or 30" deep straight tables.
117 Edge finish		
117 Leg finish		
G Glides		

Upstart Tables

curved leg only

Currents

description	h	pattern no.	Paint
Curved leg with glide	23 ⁷ / ₈ " - 28 ⁷ / ₈ "	AUPCGV ()	\$123.



Curved leg with caster	25 ⁷ / ₈ " - 29 ⁷ / ₈ "	AUPCCV ()	123.
------------------------	---	-------------------	------





Order Code	Specification Information	Application Notes
Example: AUPCC 114	Specify:	Each curved Upstart leg comes with four (4) metal inserts and four (4) screws.
A Currents	<i>Casters/glides</i>	
UP Upstart	C Casters	When creating a freestanding table using Upstart legs, Upstart legs must be attached using metal inserts.
C Curved leg	G Glides	
C Casters		Curved Upstart legs must be positioned in accordance with BIFMA guidelines.
114 Leg finish	<i>Leg finishes, paint</i>	Upstart tables have four or five curved legs with 5" adjustable leveler glides or 4" adjustable casters. Adjustment range is 27" - 31" for casters and 25" - 30" for glides.
	See Color Program Page	

Plannable Upstart Tables

Rectangular Table Desk

Currents


description	w	d	h	pattern no.	lam.
 24" D	30"	23 5/8"	27 3/4" - 32 3/4"	AUPM S30S4 () G () ()	\$609.
	36"	23 5/8"	27 3/4" - 32 3/4"	AUPM S36S4 () G () ()	643.
	42"	23 5/8"	27 3/4" - 32 3/4"	AUPM S42S4 () G () ()	679.
	48"	23 5/8"	27 3/4" - 32 3/4"	AUPM S48S4 () G () ()	715.
	54"	23 5/8"	27 3/4" - 32 3/4"	AUPM S54S4 () G () ()	747.
	60"	23 5/8"	27 3/4" - 32 3/4"	AUPM S60S4 () G () ()	781.
	66"	23 5/8"	27 3/4" - 32 3/4"	AUPM S66S4 () G () ()	819.
	72"	23 5/8"	27 3/4" - 32 3/4"	AUPM S72S4 () G () ()	854.
	84"	23 5/8"	27 3/4" - 32 3/4"	AUPM S84S4 () G () ()	921.
 30" D	30"	29 5/8"	27 3/4" - 32 3/4"	AUPM S30D4 () G () ()	689.
	36"	29 5/8"	27 3/4" - 32 3/4"	AUPM S36D4 () G () ()	725.
	42"	29 5/8"	27 3/4" - 32 3/4"	AUPM S42D4 () G () ()	760.
	48"	29 5/8"	27 3/4" - 32 3/4"	AUPM S48D4 () () () ()	792.
	54"	29 5/8"	27 3/4" - 32 3/4"	AUPM S54D4 () () () ()	834.
	60"	29 5/8"	27 3/4" - 32 3/4"	AUPM S60D4 () () () ()	871.
	66"	29 5/8"	27 3/4" - 32 3/4"	AUPM S66D4 () () () ()	892.
	72"	29 5/8"	27 3/4" - 32 3/4"	AUPM S72D4 () () () ()	911.
	84"	29 5/8"	27 3/4" - 32 3/4"	AUPM S84D4 () () () ()	1,013.

Order Code	Specification Information	Application Notes
Example: AUPM S72S4 AG 118 114 114	Specify:	<i>Edge finishes, T-mold</i> See Color Program Page
A Currents	<i>Grommet/No grommet</i>	<i>Leg finishes, paint</i> See Color Program Page
UP Upstart	A Grommet	24" deep rectangular table desks can only be ordered with glides.
M Plannable	B No grommet	30" deep rectangular table desks in 30", 36" and 42" width can only be ordered with glides.
S Table Shape	<i>Casters/glides</i>	For Veneer Group 1, only black or trim grey edgebands can be specified.
72 Width	C Casters	Translucent orange, Translucent blue and Frosty white edgebands are not available on Plannable Upstart tables.
S Depth	G Glides	Suspended pedestals may not be used on Upstart tables.
4 Leg quantity	<i>Top finish, plastic laminates</i> See Color Program Page	
A Grommet	<i>Veneer Group 1</i> See Color Program Page. Veneer finishes are available through Custom Product Development.	
G Glides		
118 Top finish		
114 Edge finish		
114 Leg finish		

Plannable Upstart Tables

Rectangular Return

Currents

description	w	d	h	pattern no.	lam.
24" D 	36"	23 5/8"	27 3/4" - 32 3/4"	AUPM S36S2 () () () ()	\$486.
	42"	23 5/8"	27 3/4" - 32 3/4"	AUPM S42S2 () () () ()	521.
	48"	23 5/8"	27 3/4" - 32 3/4"	AUPM S48S2 () () () ()	554.
	60"	23 5/8"	27 3/4" - 32 3/4"	AUPM S60S2 () () () ()	670.


Order Code	Specification Information	Application Notes
Example: AUPM S36S2 AC 118 114 114	Specify:	<i>Edge finishes, T-mold</i> See Color Program Page
A Currents	<i>Grommet/No grommet</i>	
UP Upstart	A Grommet	<i>Leg finishes, paint</i> See Color Program Page
M Plannable	B No grommet	For Veneer Group 1, only black or trim grey edgebands can be specified.
S Table Shape	<i>Casters/glides</i>	Translucent orange, Translucent blue and Frosty white edgebands are not available on Plannable Upstart tables.
36 Width	C Casters	Suspended pedestals may not be used on Upstart tables.
S Depth	G Glides	
2 Leg quantity	<i>Top finish, plastic laminates</i> See Color Program Page	
A Grommet	<i>Veneer Group 1</i> See Color Program Page. Veneer finishes are available through Custom Product Development.	
C Casters		
118 Top finish		
114 Edge finish		
114 Leg finish		

Plannable Upstart Tables


corner

Currents

description	w	d	h	pattern no.	lam.
24" D both sides corner worksurfaces	42"	42"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C4242S5 () () () ()	\$1,044.
	48"	48"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C4848S5 () () () ()	1,128.
	60"	60"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C6060S5 () C () ()	1,470.



30" D both sides corner worksurfaces	42"	42"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C4242D5 () () () ()	1,102.
	48"	48"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C4848D5 () () () ()	1,187.
	60"	60"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C6060D5 () C () ()	1,530.



Order Code	Specification Information	Application Notes
Example: AUPM C4242S5 AC 118 114 114	Specify:	<i>Edge finishes, T-mold</i> See Color Program Page
A Currents	<i>Grommet/No grommet</i>	<i>Leg finishes, paint</i> See Color Program Page
UP Upstart	A Grommet	For Veneer Group 1, only black or trim grey edgebands can be specified.
M Plannable	B No grommet	Translucent orange, Translucent blue and Frosty white edgebands are not available on Plannable Upstart tables.
C Table Shape	<i>Casters/glides</i>	Suspended pedestals may not be used on Upstart tables.
4242 Width	C Casters	
S Depth	G Glides	
5 Leg quantity	<i>Top finish, plastic laminates</i> See Color Program Page	
A Grommet	<i>Veneer Group 1</i> See Color Program Page. Veneer finishes are available through Custom Product Development.	
C Casters		
118 Top finish		
114 Edge finish		
114 Leg finish		


Plannable Upstart Tables

Currents


extended corner

extended left


description	w	d	h	pattern no.	lam.
24" D both sides corner worksurface, extended left	60"	36"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C6036S5 () () () ()	\$922.
	60"	42"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C6042S5 () () () ()	1,007.
	60"	48"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C6048S5 () () () ()	1,094.
	72"	36"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C7236S5 () () () ()	1,094.
	72"	42"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C7242S5 () () () ()	1,180.
	72"	48"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C7248S5 () () () ()	1,268.
	84"	48"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C8448S5 () () () ()	1,438.



30" D both sides corner worksurface, extended left	60"	48"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C6048D5 () C () () ()	1,181.
	72"	48"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C7248D5 () C () () ()	1,354.
	84"	48"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C8448D5 () C () () ()	1,525.



30" D left/24" D right corner worksurface, extended left	60"	42"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C6042L5 () C () () ()	1,094.
	60"	48"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C6048L5 () C () () ()	1,181.
	72"	42"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C7242L5 () C () () ()	1,268.
	72"	48"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C7248L5 () C () () ()	1,354.
	84"	48"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C8448L5 () C () () ()	1,525.



Order Code	Specification Information	Application Notes
Example: AUPM C7236S5 AC 118 114 114	Specify:	<i>Edge finishes, T-mold</i> See Color Program Page
A Currents	<i>Grommet/No grommet</i>	<i>Leg finishes, paint</i> See Color Program Page
UP Upstart	A Grommet	For Veneer Group 1, only black or trim grey edgebands can be specified.
M Plannable	B No grommet	Translucent orange, Translucent blue and Frosty white edgebands are not available on Plannable Upstart tables.
C Table Shape	<i>Casters/glides</i>	Suspended pedestals may not be used on Upstart tables.
7236 Width	C Casters	
S Depth	G Glides	
5 Leg quantity	<i>Top finish, plastic laminates</i> See Color Program Page	
A Grommet	<i>Veneer Group 1</i> See Color Program Page. Veneer finishes are available through Custom Product Development.	
C Casters		
118 Top finish		
114 Edge finish		
114 Leg finish		

Plannable Upstart tops have flat fronts allowing 2 tables to meet at right angles.

Plannable Upstart tables have four or five straight legs with 5" adjustable leveler glides or 4" adjustable casters. Adjustment range is 27³/₄" - 31³/₄" for casters and 27³/₄" - 32³/₄" for glides.

Rectangular return with two legs includes flat bracket for attachment to primary worksurfaces at right angle.

Plannable Upstart corner and extended corner include worksurface stiffeners that double as horizontal cable managers.

Upstart table desks and storage


Plannable Upstart Tables

Currents

extended corner

extended left

description	w	d	h	pattern no.	lam.
24" D left/30" D right corner worksurface, extended left	60"	42"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C6042R5 () C () ()	\$1,094.
	60"	48"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C6048R5 () C () ()	1,181.
	72"	42"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C7242R5 () C () ()	1,268.
	72"	48"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C7248R5 () C () ()	1,354.
	84"	48"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C8448R5 () C () ()	1,525.



Order Code	Specification Information	Application Notes
Example: AUPM C7236S5 AC 118	Specify:	<i>Edge finishes, T-mold</i> See Color Program Page
114 114	<i>Grommet/No grommet</i>	<i>Leg finishes, paint</i> See Color Program Page
A Currents	A Grommet	For Veneer Group 1, only black or trim grey edgebands can be specified.
UP Upstart	B No grommet	Translucent orange, Translucent blue and Frosty white edgebands are not available on Plannable Upstart tables.
M Plannable	<i>Casters/glides</i>	Suspended pedestals may not be used on Upstart tables.
C Table Shape	C Casters	
7236 Width	G Glides	
S Depth	<i>Top finish, plastic laminates</i> See Color Program Page	
5 Leg quantity	<i>Veneer Group 1</i> See Color Program Page. Veneer finishes are available through Custom Product Development.	
A Grommet		
C Casters		
118 Top finish		
114 Edge finish		
114 Leg finish		


Plannable Upstart Tables

Currents


extended corner

extended right


description	w	d	h	pattern no.	lam.
24" D both sides corner worksurface, extended right	36"	60"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C3660S5 () () () ()	\$922.
	36"	72"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C3672S5 () () () ()	1,094.
	42"	60"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C4260S5 () () () ()	1,007.
	42"	72"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C4272S5 () C () () ()	1,180.
	48"	60"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C4860S5 () C () () ()	1,094.
	48"	72"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C4872S5 () C () () ()	1,268.
	48"	84"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C4884S5 () C () () ()	1,438.



30" D both sides corner worksurface, extended right	48"	60"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C4860D5 () C () () ()	1,181.
	48"	72"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C4872D5 () C () () ()	1,354.
	48"	84"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C4884D5 () C () () ()	1,525.



24" D left/30" D right corner worksurface, extended right	42"	60"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C4260R5 () C () () ()	1,094.
	42"	72"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C4272R5 () C () () ()	1,268.
	48"	60"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C4860R5 () C () () ()	1,181.
	48"	72"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C4872R5 () C () () ()	1,354.
	48"	84"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM C4884R5 () C () () ()	1,525.



Order Code	Specification Information	Application Notes
Example: AUPM C4872S5 AC 118 114 114	Specify:	<i>Edge finishes, T-mold</i> See Color Program Page
A Currents	<i>Grommet/No grommet</i>	<i>Leg finishes, paint</i> See Color Program Page
UP Upstart	A Grommet	For Veneer Group 1, only black or trim grey edgebands can be specified.
M Plannable	B No grommet	Translucent orange, Translucent blue and Frosty white edgebands are not available on Plannable Upstart tables.
C Table Shape	<i>Casters/glides</i>	Suspended pedestals may not be used on Upstart tables.
4872 Width	C Casters	
S Depth	G Glides	
5 Leg quantity	<i>Top finish, plastic laminates</i> See Color Program Page	
A Grommet	<i>Veneer Group 1</i> See Color Program Page. Veneer finishes are available through Custom Product Development.	
C Casters		
118 Top finish		
114 Edge finish		
114 Leg finish		

Plannable Upstart tops have flat fronts allowing 2 tables to meet at right angles.

Plannable Upstart tables have four or five straight legs with 5" adjustable leveler glides or 4" adjustable casters. Adjustment range is 27³/₄" - 31³/₄" for casters and 27³/₄" - 32³/₄" for glides.

Rectangular return with two legs includes flat bracket for attachment to primary worksurfaces at right angle.

Plannable Upstart corner and extended corner include worksurface stiffeners that double as horizontal cable managers.

Upstart table desks and storage


Plannable Upstart Tables

Currents

extended corner

extended right

description	w	d	h	pattern no.	lam.
30" D left/24" D right corner worksurface, extended right	42"	60"	27 3/4" - 32 3/4"	AUPM C4260L5 () C () ()	\$1,094.
	42"	72"	27 3/4" - 32 3/4"	AUPM C4272L5 () C () ()	1,268.
	48"	60"	27 3/4" - 32 3/4"	AUPM C4860L5 () C () ()	1,181.
	48"	72"	27 3/4" - 32 3/4"	AUPM C4872L5 () C () ()	1,354.
	48"	84"	27 3/4" - 32 3/4"	AUPM C4884L5 () C () ()	1,525.




Order Code	Specification Information	Application Notes
Example: AUPM C4872S5 AC 118 114 114	Specify:	<i>Edge finishes, T-mold</i> See Color Program Page
A Currents	<i>Grommet/No grommet</i>	<i>Leg finishes, paint</i> See Color Program Page
UP Upstart	A Grommet	For Veneer Group 1, only black or trim grey edgebands can be specified.
M Plannable	B No grommet	Translucent orange, Translucent blue and Frosty white edgebands are not available on Plannable Upstart tables.
C Table Shape	<i>Casters/glides</i>	Suspended pedestals may not be used on Upstart tables.
4872 Width	C Casters	
S Depth	G Glides	
5 Leg quantity	<i>Top finish, plastic laminates</i> See Color Program Page	
A Grommet	<i>Veneer Group 1</i> See Color Program Page. Veneer finishes are available through Custom Product Development.	
C Casters		
118 Top finish		
114 Edge finish		
114 Leg finish		


Plannable Upstart Tables half round and P-shapes

Currents


description	w	d	h	pattern no.	lam.
Half round table desk, four legs	59"	30"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM D594 () G () ()	\$871.
	60"	30"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM D604 () G () ()	871.



P-shape surface, extended right	48"	75"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM P4875S5 () C () ()	1,454.
---------------------------------	-----	-----	---	-----------------------------------	--------



P-shape surface, extended left	75"	48"	27 ³ / ₄ " - 32 ³ / ₄ "	AUPM P7548S5 () C () ()	1,454.
--------------------------------	-----	-----	---	-----------------------------------	--------



Order Code	Specification Information	Application Notes
Example: AUPM P4875S5 AC 118 114 114	Specify:	<i>Edge finishes, T-mold</i> See Color Program Page
A Currents	<i>Grommet/No grommet</i>	<i>Leg finishes, paint</i> See Color Program Page
UP Upstart	A Grommet	For Veneer Group 1, only black or trim grey edgebands can be specified.
M Plannable	B No grommet	Translucent orange, Translucent blue and Frosty white edgebands are not available on Plannable Upstart tables.
P Table Shape	<i>Casters/glides</i>	Suspended pedestals may not be used on Upstart tables.
4875 Width	C Casters	
S Depth	G Glides	
5 Leg quantity	<i>Top finish, plastic laminates</i> See Color Program Page	
A Grommet	<i>Veneer Group 1</i> See Color Program Page. Veneer finishes are available through Custom Product Development.	
C Casters		
118 Top finish		
114 Edge finish		
114 Leg finish		

Plannable Upstart tops have flat fronts allowing 2 tables to meet at right angles.

Plannable Upstart tables have four or five straight legs with 5" adjustable leveler glides or 4" adjustable casters. Adjustment range is 27³/₄" - 31³/₄" for casters and 27³/₄" - 32³/₄" for glides.

Rectangular return with two legs includes flat bracket for attachment to primary worksurfaces at right angle.

Plannable Upstart half round and P-shape tables include worksurface stiffeners that double as horizontal cable managers.

Upstart table desks and storage

Plannable Upstart Tables


straight leg only

Currents





description	h	pattern no.	Paint
Straight leg with glide	26 ⁵ / ₈ " - 31 ⁵ / ₈ "	AUPM SGV ()	\$123.



Straight leg with caster	26 ⁵ / ₈ " - 30 ⁵ / ₈ "	AUPM SCV ()	123.
--------------------------	---	---------------------	------



Order Code	Specification Information	Application Notes
Example: AUPM SC 114	Specify:	<p>Plannable Upstart straight leg may not be used with Original Upstart tables due to stability issues.</p> <p>Each straight Plannable Upstart leg comes with four (4) metal inserts and four (4) screws.</p> <p>When creating a freestanding table using Upstart legs, Upstart legs must be attached using metal inserts.</p> <p>Straight Plannable Upstart legs must be positioned in accordance with BIFMA guidelines.</p> <p>Plannable Upstart tables have four or five straight legs with 5" adjustable leveler glides or 4" adjustable casters. Adjustment range is 27³/₄" - 31³/₄" for casters and 27³/₄" - 32³/₄" for glides.</p>
A Currents	<i>Casters/glides</i>	
UP Upstart	C Casters	
M Plannable	G Glides	
S Straight leg		
C Casters		
114 Leg finish	<i>Leg finishes, paint</i> See Color Program Page	

type	w	d	h	pattern no.	list price
Flat bracket 	3 1/2"	14"		AB1 F24	\$44.
Cable tray 	20"	2"	6"	AR1 CB	172.
Carpet grips (set of 10) 				MM2CG	33.
Non skid grips (set of 10) 				AA1NSK	46.
Lockable caster (set of 4)	2"	2"	2 1/4"	AUPLC4	55.
Lockable caster (set of 5)	2"	2"	2 1/4"	AUPLC5	72.

Order Code

Example: **AA1-NSK****A** Currents**A1** Accessory**NSK** Non skid grips

Specification Information

Flat bracket and cable tray are black, painted steel.

Application Notes

Flat bracket attaches return worksurface to primary worksurface at right angle.

Cable tray attaches beneath stiffener under table surface to accommodate transformers or a bundle of cable.




Carpet grips snap into underside of Upstart leveling glides for traction on carpeted floors.

Non-skid grips snap into leveling glides for traction on hard-surface floors.

Locking casters replace standard non-locking casters.

Upstart Privacy Screens for Upstart tables

Currents

type	application	w	d	h	pattern no.	list price	
	Polycarbonate screen, back of table	36"	3/4"	24"	AUP B3624RC ()	\$610.	
		48"	3/4"	24"	AUP B4824RC ()	696.	
		60"	3/4"	24"	AUP B6024RC ()	804.	
		72"	3/4"	24"	AUP B7224RC ()	877.	
	Marker surface screen, back of table	36"	3/4"	24"	AUP B3624M ()	610.	
		48"	3/4"	24"	AUP B4824M ()	696.	
		60"	3/4"	24"	AUP B6024M ()	804.	
		72"	3/4"	24"	AUP B7224M ()	877.	
	Magnet rail	36" screen	18"	1/4"	2"	AUP MR36 ()	72.
		48" screen	30"	1/4"	2"	AUP MR48 ()	81.
		60" screen	36"	1/4"	2"	AUP MR60 ()	89.
		72" screen	48"	1/4"	2"	AUP MR72 ()	94.

Order Code	Specification Information	Application Notes
Example: AUP B7224 RC 117	Specify surface type and painted finish for screen frame, brackets and magnet rail.	Upstart screens mount on the back of Upstart tables to provide partial enclosure above and below worksurface height.
A Currents		
UP Upstart		
B Back of worksurface		Magnet rails span between screen mounting brackets to hang paper documents.
72 Width	<i>Surface type:</i>	Magnet rails correspond in width to privacy screens.
24 Height	RC Ribbed polycarbonate	Please refer to Introduction page for table and screen dimensions.
RC Polycarbonate	M Marker Surface	
117 Paint finish		
		Screens have a translucent, ribbed polycarbonate or marker surface core. Perimeter frame is painted steel with trim grey molded corner blocks.
		Screens include brackets that mount to matching holes under Upstart tables of the same width. Bracket holes are also provided for mounting two 36" wide screens on a 72" wide Upstart table.
		Screen mounts in two positions, creating enclosure to a height of 39" or 48" when the table top is adjusted to 28".
		Screens may be shared between desks in back to back configurations.

Wall Mounting Suggestions

The following information is provided only as a guide, and represents minimum recommendations only. Knoll does not accept responsibility for the attachment of any Knoll product to a Customer's site wall. Wall specification/construction is the responsibility of the Customer and its structural engineer/architect. Failure to properly attach Knoll products to adequate wall structures can lead to property damage and/or personal injury.

You should consult your own structural engineers and/or architects and must not rely on the information provided herein.

It is the responsibility of the Customer and its structural engineers/architects to verify that the permanent structural walls (studs, blocks, solid masonry, etc.) on which the Knoll products are intended to be mounted are designed appropriately to support the product weight, PLUS 3 lbs. per linear inch for each useable shelf length

NOTE: A cabinet's top is considered a "useable shelf" and MUST be included in the calculation of the total load for an overhead cabinet.

It is the responsibility of the Customer and its structural engineer/architects to specify the fasteners and method for attaching the Knoll supplied wall mounting cleat, bracket, frame, etc. to the supporting wall and to confirm that the installers have adhered to these specifications. For all local building standards and codes, and additional requirements (including, but not limited to, seismic conditions) the Customer should always consult local code agencies.

		EXISTING CONSTRUCTION				
	NEW CONSTRUCTION	Cinder Block or Poured Concrete Masonry Wall	Wood Stud Wall, the studs being FULL HEIGHT to the roof/floor above	Wood Stud Wall, the studs being only Ceiling Height	Steel Stud Wall, the studs being FULL HEIGHT to the roof/floor above	Steel Stud Wall, the studs being only Ceiling Height
Stud Specification	Wood studs, grade #2 or better, 3 1/2" minimum width, OR Metal studs, minimum 25 gage thickness, 3 5/8" minimum width	The wall must be a minimum of 6" thick, and must be full height to the roof/ floor structure above	Wood studs must be Grade #2, or better, 3 1/2" minimum width	Wood studs must be Grade #2, or better, 3 1/2" minimum width	Metal studs must be minimum 25 gage thickness, 3 5/8" minimum width	Metal studs must be minimum 25 gage thickness, 3 5/8" minimum width
Stud Centers	Metal and wood studs must be spaced at 16" c/c maximum	N/A	Wood studs must be spaced at 16" c/c maximum	Wood studs must be spaced at 16" c/c maximum	Metal studs must be spaced at 16" c/c maximum	Metal studs must be spaced at 16" c/c maximum
Stud Height	Metal and wood studs must extend upwards, and be securely attached to the roof/ floor structure above			Wood studs must be braced above the ceiling, and be securely attached to the roof/floor structure above Affix #2 grade 'cap' across the top of the studs, then place diagonal studs from the top cap up to underside of the roof/ floor structure above		Metal studs must be braced above the ceiling, and be securely attached to the roof/floor structure above Affix metal bracing 'cap' across the top of the studs, then place diagonal studs from the top cap up to underside of the roof / floor structure above
Mounting the Knoll Supplied Cleat, Bracket, Frame, etc*	Insert a 2" X 6" wood block, #2 grade or better, [or a Danback™ flexible wood backing system] horizontally between each of the studs to accommodate the full width of the cabinet, and beyond to the next stud. Fasten the wood block to each stud using three screws at the ends of each block. (Fasten the Danback™ as directed by the manufacturer) Fasten the Knoll supplied wall mounting cleat, bracket, frame, etc directly to each wood block every 6" For wall mounting structures that have a rectangular frame-like configuration: fasten the top horizontal element of the frame to the wood blocking every 6", and fasten the lower horizontal element to each wall stud, using one fastener per stud.	Fasten the Knoll supplied cabinet wall mounting cleat, bracket, frame, etc. directly to the masonry wall every 6" For wall mounting structures that have a rectangular frame-like configuration: fasten the top horizontal element of the frame to the wall every 6", and fasten the lower horizontal element to the wall every 16" Replace the drywall and repair as desired. Fasten the Knoll supplied wall mounting cleat, rail, frame, etc directly to the wood block every 6" For wall mounting structures that have a rectangular frame-like configuration: fasten the top horizontal element of the frame to the wood blocking every 6", and fasten the lower horizontal element to each wall stud, using one fastener per stud.	In the desired location of the cabinet mounting rail, remove an 8" high section of drywall the width of the cabinet, and beyond to the next stud. Insert a 2" X 6" wood block, #2 grade or better, horizontally between each of the exposed studs. Fasten the wood block to each stud using three screws at the ends of each block. Replace the drywall and repair as desired. Fasten the Knoll supplied wall mounting cleat, rail, frame, etc directly to the wood block every 6" For wall mounting structures that have a rectangular frame-like configuration: fasten the top horizontal element of the frame to the wood blocking every 6", and fasten the lower horizontal element to each wall stud, using one fastener per stud.	In the desired location of the cabinet mounting rail, remove an 8" high section of drywall the width of the cabinet, and beyond to the next stud. Insert a 2" X 6" wood block, #2 grade or better, horizontally between each of the exposed studs. Fasten the wood block to each stud using three screws at the ends of each block. Replace the drywall and repair as desired. Fasten the Knoll supplied wall mounting cleat, rail, frame, etc directly to the wood block every 6" For wall mounting structures that have a rectangular frame-like configuration: fasten the top horizontal element of the frame to the wood blocking every 6", and fasten the lower horizontal element to each wall stud, using one fastener per stud.	In the desired location of the cabinet mounting rail, remove an 8" high section of drywall the width of the cabinet, and beyond to the next stud. Insert a 2" X 6" wood block, #2 grade or better, [or a Danback™ flexible wood backing system] horizontally between each of the exposed studs. Fasten the wood block to each stud using three screws at the ends of each block. Replace the drywall and repair as desired. Fasten the Knoll supplied wall mounting cleat, rail, frame, etc directly to the wood block every 6" For wall mounting structures that have a rectangular frame-like configuration: fasten the top horizontal element of the frame to the wood blocking every 6", and fasten the lower horizontal element to each wall stud, using one fastener per stud.	In the desired location of the cabinet mounting rail, remove an 8" high section of drywall the width of the cabinet, and beyond to the next stud. Insert a 2" X 6" wood block, #2 grade or better, [or a Danback™ flexible wood backing system] horizontally between each of the exposed studs. Fasten the wood block to each stud using three screws at the ends of each block. Replace the drywall and repair as desired. Fasten the Knoll supplied wall mounting cleat, rail, frame, etc directly to the wood block every 6" For wall mounting structures that have a rectangular frame-like configuration: fasten the top horizontal element of the frame to the wood blocking every 6", and fasten the lower horizontal element to each wall stud, using one fastener per stud.
*Graham Wall Hung Shelf	The Graham Wall Hung Shelf Bracket (and others like it) requires full support behind the full height of the bracket This should be accomplished by insertion of additional 2"X 6" wood blocking between the studs as defined above	Fasten the Knoll supplied wall mounting brackets directly to the masonry wall, using the holes provided in each bracket	The Graham Wall Hung Shelf Bracket (and others like it) requires full support behind the full height of the bracket This should be accomplished by insertion of additional 2"X 6" wood blocking between the studs as defined above	The Graham Wall Hung Shelf Bracket (and others like it) requires full support behind the full height of the bracket This should be accomplished by insertion of additional 2"X 6" wood blocking between the studs as defined above	The Graham Wall Hung Shelf Bracket (and others like it) requires full support behind the full height of the bracket This should be accomplished by insertion of additional 2"X 6" wood blocking between the studs as defined above	The Graham Wall Hung Shelf Bracket (and others like it) requires full support behind the full height of the bracket This should be accomplished by insertion of additional 2"X 6" wood blocking between the studs as defined above
Fasten the Knoll supplied wall cleat with...	#10 x 2 1/2" Grabber Woodys Screws or equiv. @ 6" c/c, screwed directly into the wood blocking	3/16" x 3 1/2" Tapcon Masonry Screws or equiv. @ 6" c/c with 1-1/4" embedment, screwed directly into the masonry wall	#10 x 2 1/2" Grabber Woodys Screws or equiv. @ 6" c/c, screwed directly into the wood blocking	#10 x 2 1/2" Grabber Woodys Screws or equiv. @ 6" c/c, screwed directly into the wood blocking	#10 x 2 1/2" Grabber Woodys Screws or equiv. @ 6" c/c, screwed directly into the wood blocking	#10 x 2 1/2" Grabber Woodys Screws or equiv. @ 6" c/c, screwed directly into the wood blocking

Alpha-Numeric Index

<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>
AA1CG	33	ACE1L4278SSN	72	ACE1W423024N	75	AD C64 DH	86
AA1DHPS36(5)	41	ACE1L4848DDN	71	ACE1W482430N	75	AD C64 LF	82
AA1DHPS42(5)	41	ACE1L4848DSN	71	ACE1W483024N	75	AD C64 LH	86
AA1DHPS50(5)	41	ACE1L4848SDN	71	ACE1W722430N	75	AD C64 SF	82
AA1DHPS57(5)	41	ACE1L4848SSN	71	ACE1W723024N	75	AD C64 SH	86
AA1DHPS64(5)	41	ACE1L4860DSN	72	AD C35 SF	83	AD C74 DF	82
AA1DHTC	41	ACE1L4860SDN	72	AD C35 SH	87	AD C74 DH	86
AA1FDB27	33	ACE1L4860SSN	72	AD C36 SF	83	AD C74 LF	82
AA1FDB28	33	ACE1L4866DSN	72	AD C36 SH	87	AD C74 LH	86
AA1FUPS39	40	ACE1L4866SDN	72	AD C4242 DF	84	AD C74 SF	82
AA1NSK	33, 107	ACE1L4866SSN	72	AD C4242 LF	84	AD C74 SH	86
AA1OR	27	ACE1L4872DSN	72	AD C4242 LH	88	AD S36 DF	85
AA1ORD	27	ACE1L4872SDN	72	AD C4242 RF	84	AD S36 DH	89
AA1RPS34	37	ACE1L4872SSN	72	AD C4242 RH	88	AD S36 SF	85
AA1RPS42	37	ACE1L4878SSN	72	AD C4242 SF	84	AD S36 SH	89
AA1RPS49	37	ACE1L4884SSN	72	AD C4242 SH	88	AD S42 DF	85
AA1RPS64	37	ACE1L6042SSN	72	AD C44 DF	84	AD S42 DH	89
AA1RPS79	37	ACE1L6048DSN	73	AD C44 DH	88	AD S42 SF	85
AA1RTC	37	ACE1L6048SDN	73	AD C44 LF	84	AD S42 SH	89
AA1UA39	39	ACE1L6048SSN	72	AD C44 LH	88	AD S48 DF	85
AA1UA48	39	ACE1L6642SSN	73	AD C44 RF	84	AD S48 DH	89
AA1UA64	39	ACE1L6648DSN	73	AD C44 RH	88	AD S48 SF	85
AA1UPS39	39	ACE1L6648SDN	73	AD C44 SF	84	AD S48 SH	89
AA1UPS48	39	ACE1L6648SSN	73	AD C44 SH	88	AD S60 DF	85
AA1UPS64	39	ACE1L7242SSN	73	AD C45 DF	83	AD S60 DH	89
AA2 UTC	39, 40	ACE1L7248DSN	73	AD C45 DH	87	AD S60 SF	85
AB1 AC24	77	ACE1L7248SDN	73	AD C45 RF	83	AD S60 SH	89
AB1 CL24L	78	ACE1L7248SSN	73	AD C45 RH	87	AD S72 DF	85
AB1 CL24R	78	ACE1L7842SSN	73	AD C45 SF	83	AD S72 DH	89
AB1 CL30L	78	ACE1L7848SSN	73	AD C45 SH	87	AD S72 SF	85
AB1 CL30R	78	ACE1L8448SSN	73	AD C46 DF	83	AD S72 SH	89
AB1 CLF24L	78	ACE1R1212G	74	AD C46 DH	87	AD S84 SF	85
AB1 CLF24R	78	ACE1R2424N	70	AD C46 RF	83	AD S84 SH	89
AB1 CLF30L	78	ACE1R2430N	70	AD C46 RH	87	AF 4848 AM	50
AB1 CLF30R	78	ACE1R3024N	70	AD C46 SF	83	AF 4860 AM	50
AB1 CS	81	ACE1R3030N	70	AD C46 SH	87	AF 6448 AM	50
AB1 F24	107	ACE1R3624N	70	AD C47 DF	83	AF 6460 AM	50
AB1 FE	77	ACE1R3630N	70	AD C47 DH	87	AMB CP12-AMP	49
AB1 I25(G/C)	78	ACE1R4224N	70	AD C47 RF	83	AMB CP24 LUC	49
AB1 I27A(G/C)	78	ACE1R4230N	70	AD C47 RH	87	AMC B10	49
AB1 I27F(G/C)	78	ACE1R4824N	70	AD C47 SF	83	AMC FP2 (L or N)	49
AB1 VL	78	ACE1R4830N	70	AD C47 SH	87	AMC FP3 (L or N)	49
AB1-ABC24	77	ACE1R5424N	70	AD C53 SF	82	AMC O3	49
AB1FAE	33, 77	ACE1R5430N	70	AD C53 SH	86	AMC O5E	49
AB2 AE	77	ACE1R6024N	70	AD C54 DF	82	AMC O6	49
AB2 FE27	77	ACE1R6030N	70	AD C54 DH	86	AMC OF500	49
AB2 FE28	77	ACE1R6624N	70	AD C54 LF	82	AMC OF625	49
ACE1CR24L	74	ACE1R6630N	70	AD C54 LH	86	AMC PDC 5E4N	49
ACE1CR24N	74	ACE1R7224N	70	AD C54 SF	82	AMC5 CP12	49
ACE1CR24R	74	ACE1R7230N	70	AD C54 SH	86	AMC5 OC20(A or B)	49
ACE1H4818	74	ACE1R7824N	70	AD C55 DF	84	AMC5 OC30(A or B)	49
ACE1H4818P	74	ACE1R7830N	70	AD C55 DH	88	AMC5 OC40(A or B)	49
ACE1H6024	74	ACE1R8424N	70	AD C55 LF	84	AMC5 OC50(A or B)	49
ACE1H6024P	74	ACE1R8430N	70	AD C55 LH	88	APA 39	32
ACE1L3636SSN	71	ACE1R9024N	70	AD C55 RF	84	APA 48	32
ACE1L4242DSN	71	ACE1R9030N	70	AD C55 RH	88	APA 64	32
ACE1L4242SDN	71	ACE1R9624N	70	AD C55 SF	84	APC 0912 A	24
ACE1L4242SSN	71	ACE1R9630N	70	AD C55 SH	88	APC 0912 C	20
ACE1L4260SSN	72	ACE1W362430N	75	AD C63 SF	82	APC 0912 CX	20
ACE1L4266SSN	72	ACE1W363024N	75	AD C63 SH	86	APC 0912 F	23
ACE1L4272SSN	72	ACE1W422430N	75	AD C64 DF	82	APC 0912 P	21

<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>
APC 0912 PT	21	APC AZ60 F	18	AR1 DY	42, 45	ARE1 DX (O or T)	47
APC 0912 S	20	APC AZ72	17	AR1 DYC	42, 45	ARE1 DY	47
APC 0924 A	24	APC AZ72 F	18	AR1 DZ	45	ARE1 DY (O or T)	47
APC 0924 C	20	APC HOC	19	AR1 DZC	45	ARE1 DZ	47
APC 0924 F	23	APC OC	19	AR1 E2	44	ARE1 DZ (O or T)	47
APC 0924 M	21	APC OCF	19	AR1 E3	44	ARE1 EP1	47
APC 0924 P	21	APF 1848	15	AR1 EJ1	43	ARE1 ET1	47
APC 0924 PT	21	APF 1860	15	AR1 EJ10	43	ARE1 ET3	47
APC 0924 S	20	APF 1872	15	AR1 EJ12	43	ARE1 ET5	47
APC 0936 A	24	APF1 3948	14	AR1 EJ2	43	ARE1 TP1	47
APC 0936 C	20	APF1 3960	14	AR1 EJ3	43	ARE1 TT1	47
APC 0936 F	23	APF1 3972	14	AR1 EJ4	43	ARE1 TT3	47
APC 0936 M	21	APF1 4848	14	AR1 EJ5	43	ARE1 TT5	47
APC 0936 P	21	APF1 4860	14	AR1 EJ6	43	AS1 DPAD	79, 80
APC 0936 PT	21	APF1 4872	14	AR1 EJ8	43	AS1 SPAD	79, 80
APC 0936 S	20	APF1 6448	14	AR1 EOM	42	AT1 D50A	92
APC 0948 A	24	APF1 6460	14	AR1 EPC1	44	AT1 D50F	92
APC 0948 C	20	APF1 6472	14	AR1 EPC2	44	AT1 D62A	92
APC 0948 F	23	APFA1 3948	14	AR1 EPH1	43	AT1 D62F	92
APC 0948 M	21	APFA1 3960	14	AR1 EPH2	43	AT1 E24LA	91
APC 0948 P	21	APFA1 3972	14	AR1 EPHF	33	AT1 E24LF	91
APC 0948 PT	21	APFA1 4848	14	AR1 EPI2	43	AT1 E24RA	91
APC 0948 S	20	APFA1 4860	14	AR1 EPI5	43	AT1 E24RF	91
APC 0960 A	24	APFA1 4872	14	AR1 EPIC	43	AT1 P36A	90
APC 0960 C	20	APFA1 6448	14	AR1 ET1	43	AT1 P36F	90
APC 0960 F	23	APFA1 6460	14	AR1 ET3	43	AT1 R42A	92
APC 0960 M	21	APFA1 6472	14	AR1 ET5	43	AT1 R42F	92
APC 0960 P	21	APR 48	16	AR1 ET8	43	AT1 R48A	92
APC 0960 PT	21	APR 480	16	AR1 HCC H10	48	AT1 R48F	92
APC 0960 S	20	APR 60	16	AR1 HOB	19	AT1 TA	90
APC 0972 A	24	APR 600	16	AR1 HOB2	19	AT1 TL	90
APC 0972 C	20	APR 72	16	AR1 PCC 100	48	AT1 W24A	90
APC 0972 F	23	APR 720	16	AR1 RCM 10	48	AT1 W24F	90
APC 0972 M	21	APT	28	AR1 T2	46	AT1 W30A	91
APC 0972 P	21	APT 48	16	AR1 T3	46	AT1 W30F	91
APC 0972 PT	21	APT 60	16	AR1 TJ1	46	AT1 W50A	92
APC 0972 S	20	APT 72	16	AR1 TJ10	46	AT1 W50F	92
APC 1636 A	24	APT C24	16	AR1 TJ12	46	AU 1224 A	51
APC 1636 F	23	APT C36	16	AR1 TJ2	46	AU 1236 A	51
APC 1648 A	24	APT C48	16	AR1 TJ3	46	AU 1248 A	51
APC 1648 F	23	APT C60	16	AR1 TJ4	46	AU 1260 A	51
APC 1648 M	21	APT C72	16	AR1 TJ5	46	AU 2124 A	51
APC 1648 P	22	APT1 C24	16	AR1 TJ6	46	AU 2136 A	51
APC 1648 PT	22	APT1 C36	16	AR1 TJ8	46	AU 2148 A	51
APC 1660 A	24	APT1 C48	16	AR1 TOM	45	AU 2160 A	51
APC 1660 F	23	APT1 C60	16	AR1 TPC1	46	AU 2824 A	51
APC 1660 M	21	APT1 C72	16	AR1 TPC2	46	AU 2836 A	51
APC 1660 P	22	APTA 48	16	AR1 TPH1	46	AU 2848 A	51
APC 1660 PT	22	APTA 60	16	AR1 TPH2	46	AU 2860 A	51
APC 1672 A	24	APTA 72	16	AR1 TPHF	33	AU1 CL12	54
APC 1672 F	23	APTA CC	28	AR1 TPI2	46	AU1 CL21	54
APC 1672 M	21	APTA CC1	28	AR1 TPI5	46	AU1 CL28	54
APC 1672 P	22	APX CIP4	48	AR1 TPIC	46	AU1 CS	54
APC 1672 PT	22	APX CIP6	48	AR1 TT1	46	AU1 CT12	54
APC 1836 A	24	APX CIP8	48	AR1 TT3	46	AU1 CT21	54
APC 1848 A	24	AR OF	19, 49	AR1 TT5	46	AU1 CT28	54
APC 1860 A	24	AR1 CB	107	AR1 TT8	46	AU1 X112	54
APC 1872 A	24	AR1 DA	42, 45	AR1-ELS-B	42, 45	AU1 X121	54
APC 2736 A	25	AR1 DAC	42, 45	AR1VCM	33	AU1 X128	54
APC 2748 A	25	AR1 DB	42, 45	AR1VCM5	33	AU1 X312	54
APC 2760 A	25	AR1 DBC	42, 45	AR1VCM6	33	AU1 X321	54
APC 2772 A	25	AR1 DC	45	ARE1 DA	47	AU1 X328	54
APC AZ48	17	AR1 DCC	45	ARE1 DB	47	AUA1 0824 G	52
APC AZ48 F	18	AR1 DX	42, 45	ARE1 DC	47	AUA1 0836 G	52
APC AZ60	17	AR1 DXC	42, 45	ARE1 DX	47	AUA1 0848 G	52

<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>
AUA1 0860 G	52	AUPM C4242D5	100	AUPM S66S4	98	AW1 C8442 R	65
AUA1 0872 G	52	AUPM C4242S5	100	AUPM S72D4	98	AW1 C8442 S	65
AUA1 1224 G	52	AUPM C4260L5	104	AUPM S72S4	98	AW1 C8448 D	65
AUA1 1236 G	52	AUPM C4260R5	103	AUPM S84D4	98	AW1 C8448 L	65
AUA1 1248 G	52	AUPM C4260S5	103	AUPM S84S4	98	AW1 C8448 R	65
AUA1 1260 G	52	AUPM C4272L5	104	AUPM SCV	106	AW1 C8448 S	65
AUA1 1272 G	52	AUPM C4272R5	103	AUPM SGV	106	AW1 CS3612	81
AUA1 1524 G	52	AUPM C4272S5	103	AW1 A60L	68	AW1 CS4812	81
AUA1 1536 G	52	AUPM C4848D5	100	AW1 A60R	68	AW1 CS6012	81
AUA1 1548 G	52	AUPM C4848S5	100	AW1 A72L	68	AW1 CS7212	81
AUA1 1560 G	52	AUPM C4860D5	103	AW1 A72R	68	AW1 F2424	63
AUA1 1572 G	52	AUPM C4860L5	104	AW1 C3660 S	66	AW1 F3024	63
AUA1224	53	AUPM C4860R5	103	AW1 C3672 S	66	AW1 F3624	63
AUA1236	53	AUPM C4860S5	103	AW1 C3684 S	66	AW1 F3630	63
AUA1248	53	AUPM C4872D5	103	AW1 C4242 D	64	AW1 F4224	63
AUA1260	53	AUPM C4872L5	104	AW1 C4242 L	64	AW1 F4824	63
AUA1272	53	AUPM C4872R5	103	AW1 C4242 R	64	AW1 F4830	63
AUA2124	53	AUPM C4872S5	103	AW1 C4242 S	64	AW1 F6024	63
AUA2136	53	AUPM C4884D5	103	AW1 C4260 L	66	AW1 F6030	63
AUA2148	53	AUPM C4884L5	104	AW1 C4260 R	66	AW1 F6624	63
AUA2160	53	AUPM C4884R5	103	AW1 C4260 S	66	AW1 F7224	63
AUA2172	53	AUPM C4884S5	103	AW1 C4272 L	66	AW1 F7230	63
AUA2824	53	AUPM C6036S5	101	AW1 C4272 R	66	AW1 F8424	63
AUA2836	53	AUPM C6042L5	101	AW1 C4272 S	66	AW1 F8430	63
AUA2848	53	AUPM C6042R5	102	AW1 C4284 L	66	AW1 P4875 S	67
AUA2860	53	AUPM C6042S5	101	AW1 C4284 R	66	AW1 P4887 S	67
AUA2872	53	AUPM C6048D5	101	AW1 C4284 S	66	AW1 P7548 S	67
AUP B3624M	108	AUPM C6048L5	101	AW1 C4848 D	64	AW1 P8748 S	67
AUP B3624RC	108	AUPM C6048R5	102	AW1 C4848 L	64	AW1 R7236	68
AUP B4824M	108	AUPM C6048S5	101	AW1 C4848 R	64	AW1 S2424	63
AUP B4824RC	108	AUPM C6060D5	100	AW1 C4848 S	64	AW1 S3024	63
AUP B6024M	108	AUPM C6060S5	100	AW1 C4860 D	66	AW1 S3624	63
AUP B6024RC	108	AUPM C7236S5	101	AW1 C4860 L	66	AW1 S3630	63
AUP B7224M	108	AUPM C7242L5	101	AW1 C4860 R	66	AW1 S4224	63
AUP B7224RC	108	AUPM C7242R5	102	AW1 C4860 S	66	AW1 S4824	63
AUP C4872S5	94	AUPM C7242S5	101	AW1 C4872 D	66	AW1 S4830	63
AUP C7248S5	94	AUPM C7248D5	101	AW1 C4872 L	66	AW1 S6024	63
AUP D624	96	AUPM C7248L5	101	AW1 C4872 R	66	AW1 S6030	63
AUP M72DC4	93	AUPM C7248R5	102	AW1 C4872 S	66	AW1 S6624	63
AUP M72DF4	93	AUPM C7248S5	101	AW1 C4884 D	66	AW1 S7224	63
AUP MR36	108	AUPM C8448D5	101	AW1 C4884 L	66	AW1 S7230	63
AUP MR48	108	AUPM C8448L5	101	AW1 C4884 R	66	AW1 S8424	63
AUP MR60	108	AUPM C8448R5	102	AW1 C4884 S	66	AW1 S8430	63
AUP MR72	108	AUPM C8448S5	101	AW1 C6036 S	65	AWM1 S36	69
AUP O664	96	AUPM D594	105	AW1 C6042 L	65	AWM1 S42	69
AUP R424	96	AUPM D604	105	AW1 C6042 R	65	AWM1 S48	69
AUP S48D4	95	AUPM P4875S5	105	AW1 C6042 S	65	AWM1 S60	69
AUP S48S2	95	AUPM P7548S5	105	AW1 C6048 D	65	AWM1 S66	69
AUP S48S4	95	AUPM S30D4	98	AW1 C6048 L	65	AWM1 S72	69
AUP S60D4	95	AUPM S30S4	98	AW1 C6048 R	65	AWM1 S78	69
AUP S72D4	95	AUPM S36D4	98	AW1 C6048 S	65	AWM1 S84	69
AUP S72E4	95	AUPM S36S2	99	AW1 C6060 D	64	AX1 AK1	31
AUP T363	96	AUPM S36S4	98	AW1 C6060 L	64	AX1 AK3	31
AUP V48S5	94	AUPM S42D4	98	AW1 C6060 R	64	AX1 F18	30
AUP W60D4	96	AUPM S42S2	99	AW1 C6060 S	64	AX1 F39	28
AUP Y72DCL4	93	AUPM S42S4	98	AW1 C7236 S	65	AX1 F48	28
AUP Y72DCR4	93	AUPM S48D4	98	AW1 C7242 L	65	AX1 F64	28
AUP Y72DFL4	93	AUPM S48S2	99	AW1 C7242 R	65	AX1 FF	15
AUP Y72DFR4	93	AUPM S48S4	98	AW1 C7242 S	65	AX1 FHLS4818	31
AUPCCV	97	AUPM S54D4	98	AW1 C7248 D	65	AX1 FWS 39	31
AUPCGV	97	AUPM S54S4	98	AW1 C7248 L	65	AX1 FWS 48	31
AUPLC4	107	AUPM S60D4	98	AW1 C7248 R	65	AX1 FWS 64	31
AUPLC5	107	AUPM S60S2	99	AW1 C7248 S	65	AX1 HLS4839	27
AUPM C3660S5	103	AUPM S60S4	98	AW1 C8436 S	65	AX1 HLS6439	27
AUPM C3672S5	103	AUPM S66D4	98	AW1 C8442 L	65	AX1 HLS6448	27

<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>	<i>pattern no.</i>	<i>page</i>
AX1 L18	29	AX1SED5739	34	AY1 LP25	60
AX1 L39	26	AX1SED5748	34	AY1 LP32	60
AX1 L48	26	AX1SED6439	34	AY1 PC16	59
AX1 L64	26	AX1SED6448	34	AY1 PC25	59
AX1 R34239	37	AX1SED6464	34	AY1 PC32	59
AX1 R34939	37	AX1SED7848	34	AY1 SCL16	61
AX1 R34948	37	AX1SED7864	34	AY1 SCT16	61
AX1 R36439	37	AX1SX39 A (L/C/P)	35	AY1 SCX16	62
AX1 R36448	37	AX1SX39 C (L/C/P)	35	AY1 SMK	61
AX1 R36464	37	AX1SX48 A (L/C/P)	35	AY1 SP16	60
AX1 R37939	37	AX1SX48 C (L/C/P)	35	AY1 SPC16	59
AX1 R37948	37	AX1SX64 A (L/C/P)	35	AY1 SX116	62
AX1 R37964	37	AX1SX64 C (L/C/P)	35	AY1 SX316	62
AX1 S	27	AY1 1224C	55	AY1 X112	62
AX1 SWS39	27	AY1 1224C A	57	AY1 X121	62
AX1 SWS48	27	AY1 1236C	55	AY1 X128	62
AX1 SWS64	27	AY1 1236C A	57	AY1 X312	62
AX1 T18	29	AY1 1248C	55	AY1 X321	62
AX1 T39	26	AY1 1248C A	57	AY1 X328	62
AX1 T48	26	AY1 1260C	55	CSAMP1616	76
AX1 T64	26	AY1 1260C A	57	MM2CG	107
AX1 V18	29	AY1 1618S	56	R3B0P0F4207	38
AX1 V39	26	AY1 1618S A	58	R3B0P0F4907	38
AX1 V48	26	AY1 1624S	56	R3B0P0F6407	38
AX1 V64	26	AY1 1624S A	58	R3B0P0F7907	38
AX1 X18	29	AY1 1630S	56	R3B0P0H4207	38
AX1 X39	26	AY1 1630S A	58	R3B0P0H4907	38
AX1 X48	26	AY1 1636S	56	R3B0P0H6407	38
AX1 X64	26	AY1 1636S A	58	R3B0P0H7907	38
AX1 Y18	29	AY1 1642S	56	R3B0T0F4207	38
AX1 Y39	26	AY1 1642S A	58	R3B0T0F4907	38
AX1 Y48	26	AY1 1648S	56	R3B0T0F6407	38
AX1 Y64	26	AY1 1648S A	58	R3B0T0F7907	38
AX1A F18H	30	AY1 1660S	56	R3B0T0H4207	38
AX1A F18L	30	AY1 1660S A	58	R3B0T0H4907	38
AX1DHES3600L(5)	36	AY1 2124C	55	R3B0T0H6407	38
AX1DHES3600R(5)	36	AY1 2124C A	57	R3B0T0H7907	38
AX1DHES3603L(5)	36	AY1 2136C	55	USAMP1616	76
AX1DHES3603R(5)	36	AY1 2136C A	57		
AX1DHES4200L(5)	36	AY1 2148C	55		
AX1DHES4200R(5)	36	AY1 2148C A	57		
AX1DHES4203L(5)	36	AY1 2160C	55		
AX1DHES4203R(5)	36	AY1 2160C A	57		
AX1DHES5000L(5)	36	AY1 2824C	55		
AX1DHES5000R(5)	36	AY1 2836C	55		
AX1DHES5003L(5)	36	AY1 2848C	55		
AX1DHES5003R(5)	36	AY1 2860C	55		
AX1DHES5700L(5)	36	AY1 AXST16	62		
AX1DHES5700R(5)	36	AY1 AXT16	62		
AX1DHES5703L(5)	36	AY1 AXT25	62		
AX1DHES5703R(5)	36	AY1 AXT32	62		
AX1DHES6400L(5)	36	AY1 CE	60		
AX1DHES6400R(5)	36	AY1 CL12	61		
AX1DHES6403L(5)	36	AY1 CL21	61		
AX1DHES6403R(5)	36	AY1 CL28	61		
AX1LEG	15	AY1 CMK	61		
AX1LEG5	15	AY1 CS	60		
AX1LEG6	15	AY1 CT12	61		
AX1SED3939	34	AY1 CT21	61		
AX1SED4239	34	AY1 CT28	61		
AX1SED4339C	34	AY1 CX12	62		
AX1SED4848	34	AY1 CX21	62		
AX1SED5039	34	AY1 CX28	62		
AX1SED5048	34	AY1 HLA	61		
AX1SED5248C	34	AY1 LP16	60		

Selling Policy

	<p>This Selling Policy supercedes all previous selling policies. Prices, discounts and product offerings are subject to change without notice.</p>
Terms & Conditions of Sales	<p>Sales by Knoll, Inc. or Knoll North America Corp. ("Seller") of Knoll Product Lines (hereinafter "Products") within the United States and Canada are made only on the terms which are contained in this Selling Policy. Seller hereby gives notice of its objection to any different or additional terms and conditions. This sale is expressly conditional upon Purchaser's assent to the terms and conditions set forth below. Additional terms and conditions may apply to KnollStudio and KnollTextiles orders. These terms and conditions may be modified or supplemented only by a written document signed by an authorized representative of Seller. These terms and conditions supercede any prior and/or contemporaneous agreements or correspondence between Purchaser and Seller. Written quotations expire thirty (30) days from the date of issuance and can be withdrawn by written notice anytime during that period. Where Purchaser and Seller have entered into the Knoll Electronic Terms and Conditions, all orders, acknowledgements, invoices and other business communications placed or transmitted in accordance with the Knoll Electronic Terms and Conditions shall be deemed to be in writing and signed and shall be valid for all purposes as if they were originated and maintained in documentary form.</p>
Ordering Information	<p>All orders must be in writing. The product pattern number(s) contained on Seller's order acknowledgement shall be the final expression of the order.</p>
Order Confirmation	<p>A purchase order is not binding on Seller until Purchaser has received Seller's order confirmation or acknowledgment.</p>
Pricing Policies	<p>List prices are subject to change without notice.</p> <p>List prices shall be those prices in effect on the date of receipt of a complete purchase order unless shipment is requested more than ninety (90) days after order entry in which case prices in effect on the date of shipment apply. List prices include specified freight costs. Unless specified in writing by Seller, no other charges are included in Seller's list prices.</p>
Taxes	<p>All sales, use, excise and other taxes applicable to the sale of the Products shall be paid by Purchaser. If Purchaser claims an exemption from any tax, Purchaser shall submit to Seller the appropriate exemption certificates.</p>
Terms of Payment	<p>Payment for one hundred percent (100%) of the net order amount is due within thirty (30) days of the date of invoice, which is generally issued upon shipment. In case of any discrepancies, such as shortages, and Seller is notified in writing within ten (10) days of receipt of Product, only that portion may be deducted and the balance paid. For orders greater than \$100,000 net, a fifty percent (50%) deposit is due at the time of order placement, with the remainder due within thirty (30) days of the date of invoice.</p> <p>KnollStudio orders less than \$2,000 require payment for one hundred percent (100%) of the net order amount (including any applicable sales tax and charges for inside delivery, special packaging, etc.), due at time of order placement. For KnollStudio orders greater than \$2,000, a one-half (50%) deposit is due at time of order placement with the remainder (including any applicable sales tax and charges for inside delivery, special packaging, etc.) due prior to shipment.</p> <p>If, in the judgment of Seller, Purchaser's financial condition does not justify the terms of the payment, Seller may require full or partial payment in advance.</p> <p>Past due accounts shall be charged one and one-half percent (1.5%) per month, or the highest rate permitted by law, whichever is less, and will be added to the outstanding balance. In the event Purchaser defaults on payment, Purchaser shall be liable for all collection costs, including reasonable attorney's fees and costs.</p>
Changes and Cancellation	<p>Purchase orders may not be changed or cancelled, in whole or in part, without prior written consent of Seller. Changes may effect delivery dates. Expenses incurred because of changes shall be charged to Purchaser. In the event of cancellations, Purchaser will be liable for reasonable cancellation charges established by Seller. Orders for special Product, orders including "COM" (hereinafter defined) material and orders pursuant to expedited delivery programs, may not be canceled.</p>
Freight Prepaid	<p>Freight is prepaid and included in the price of all Products, except KnollTextiles, within the 48 contiguous United States for orders placed with Knoll, Inc. and within Canada, excluding the Yukon, Northwest Territories, Nunavut and Newfoundland for orders placed with Knoll North America Corp. Packing is tested for rigorous motion and transportation but is not guaranteed to protect furniture from all conditions. If special packaging is required for any reason, please consult with your sales representative or dealer. Seller shall select the method of shipment and routing. Freight for all KnollTextiles orders is prepaid and added to the invoice.</p>
Delivery/Freight Charges	<p>Shipments outside the contiguous 48 United States and Canada shall be shipped F.O.B. Origin.</p> <p>For shipments outside the contiguous United States and Canada, Purchaser is responsible for the cost of freight from point of embarkation, including any handling and transportation charges incidental to loading at the point of departure and unloading at the final destination.</p> <p>Conditions beyond the control of Seller, including weather, available facilities and traffic conditions, may affect exact time of delivery. Seller shall not be responsible for specific carrier delivery date or time unless it has made a specific delivery commitment, in writing.</p> <p>Nonstandard methods of shipment and/or additional services are available upon request. Purchaser will be billed for the differential cost of any special services in excess of standard surface carrier freight costs. Premium charges, at Purchaser's request, will be added for airfreight, exclusive use of vehicle and extra, export or special packaging. Accessorial charges will be added for inside delivery, extra labor, reconsignment and redelivery.</p> <p>Partial shipments may be made and invoiced by Seller.</p>
Claims	<p>All shipments for Knoll Products within the contiguous United States and Canada are F.O.B. Origin. All risk of loss passes to Purchaser at time of delivery to carrier. Purchaser shall inspect all Products upon receipt and notify Seller within ten (10) working days after receipt of any damage or defects which are, or should be, apparent from an inspection of the Product and its packaging. Failure of Purchaser to notify Seller during the ten (10) working day period shall constitute acceptance of the Products and waiver of any apparent defects, errors or shortages. For all claims relating to Product damaged in transit or for any other claims relating to or arising out of the transportation of the Product, Purchaser must seek recovery from the carrier and Seller has no liability to Purchaser for such claims. Seller may, upon request, assist Purchaser with filing of such claims with the carrier, but Seller will not be liable for any of these transportation related claims.</p>
Seller's Security Interest	<p>Until Seller receives the full payment for the Product, Seller shall have a security interest in the Product. Purchaser agrees to perform all acts, including but not limited to the execution and filing of documentation, which may be necessary to perfect and assure the security interest of Seller.</p>
Returns	<p>The return of Products without a written authorization by Seller shall not be accepted. To receive authorization for Product return, please call Customer Service. All Products that are returned pursuant to a valid authorization shall be subject to a twenty-five percent (25%) of list restocking charge. Products not currently offered for sale by Seller (including COM) shall not be authorized for return. All returned Products must be unused, in original condition and in the original Seller packing cartons. No refund or credit shall be given for damaged Products.</p>
Held Orders/Storage	<p>If Purchaser requests that an order be held or delayed, prices and terms and conditions in effect at the time of shipment shall apply. If Purchaser requests a delay after the time when Seller can defer production, Purchaser will be invoiced for the Product, payable in accordance with standard terms, when the order is ready for shipment. Seller may transfer the Product to storage, in which case all expenses incurred in connection with storage, including demurrage, preparation for storage, storage charges and handling shall be payable by Purchaser upon submission of invoices by Seller. Risk of loss to the Product shall pass to the Purchaser upon delivery of the Product into storage.</p>

Selling Policy

Customer's Own Material	<p>A Purchaser who requests a fabric or other surface material not standard to Seller's line of Products ("COM") must submit samples of the requested material to Seller prior to entry of a purchaser order. Seller shall determine if the material is suitable to its manufacturing processes and meets any requirements of Underwriters Laboratories. If the COM is acceptable, Seller will then establish a price for using the COM or the Product in question. For a description of the procedures for submitting samples and testing, contact customer resources or your sales representative. Seller shall have no responsibility for the appearance, condition, performance, durability, colorfastness or any other physical attribute of the COM. Purchaser shall indemnify and hold Seller harmless for any damages, injuries or losses arising out of or related to use of the COM on the Product.</p>
Warranty	<p>Seller warrants to the original Purchaser only that the Products Seller manufactures and sells to Purchaser are free of defects in workmanship and materials, during the applicable warranty period set forth below.</p> <p>Warranty period set forth below is for 24-hour, 7 days a week, multi shift use (includes parts and labor to repair).</p> <p>Should any failure to conform with this limited warranty appear to a Product listed below during the applicable warranty period from the date of shipment, Seller shall, upon prompt written notice, repair or replace, at its option and costs, the affected part or parts.</p> <p><i>Product and Period of Warranty</i></p> <p><i>Lifetime: Antenna Workspaces, AutoStrada, Calibre, Crinion Open Table, Currents, Dividends Horizon, Morrison, Reff Profiles laminate, Rockwell Unscripted, Series 2 Storage, Template, Quoin and other non-wood components (except cascade edge worksurfaces, operational parts, controls, electrical, Lighting, Series 2 Veneer Front Storage, digital locks, upholstery, textiles and leathers, special or custom products, see below)</i></p> <p><i>12 Years: Chadwick, Generation by Knoll, k. task, Life, Moment, MultiGeneration by Knoll, Ollo, ReGeneration by Knoll, Remix, and Toboggan seating (except seating upholstery, textiles, leathers and finishes, see below).</i></p> <p><i>10 Years: Anchor Storage except digital locks, Antenna Workspaces, AutoStrada, Crinion Open Table, Dividends Horizon, Dividends Horizon Satellite Surfaces, Reff Profiles, Rockwell Unscripted, Quoin wood components, Template wood components, Series 2 Veneer Front Storage, cascade edge worksurfaces, Wood Casegoods (The Graham Collection) (except wood casegoods upholstered surfaces, see below), Reuter overheads, Reuter vertical storage, KnollExtra Sapper Monitor Arm Collection, Sapper XYZ Monitor Arm Series, Adjustable keyboard mechanisms and platforms, Communication Boards (except fabric board textiles, cork and FilzFelt, see below), Smokador collection (except leathers, see below), Orchestra Universal Systems Accessories, k. lounge structural components, KnollStudio Pixel and Propeller, Tone bases and k.screens.</i></p> <p><i>5 Years: Operational parts, controls, electrical, Lighting (except light ballasts, bulbs and power supply, see below), special or custom product, wood veneer products and plywood, Currents handcrank, KnollStudio, Rockwell Unscripted wire bases, Spark Series seating structural elements, structural elements of all KnollStudio outdoor products including all Richard Schultz designed products, KnollExtra CPU holders and all universal storage drawers and Power Collection, k. bench (except changes in finish, see below) and k. stand bases (except changes in finish, see below).</i></p> <p><i>3 Years: Rockwell Unscripted upholstery (except textiles and leather), Office Seating upholstery, textiles, leathers and finishes. Fabric boards textiles and Smokador Collection leathers, KnollExtra Pop Up Screens.</i></p> <p><i>2 Years: Anchor Storage digital locks, Quoin digital locks, all other KnollExtra product and KnollTextiles Ultrasuede.</i></p> <p><i>1 Year: Light ballasts, bulbs and power supply, seating upholstered arm pads and soft arm pads, wood casegoods upholstered surfaces. KnollStudio, outdoor product finishes, k. lounge upholstery and k. lounge fabric. Rockwell Unscripted fabric and accessories, Spinneybeck leathers, and KnollTextiles upholstery except Ultrasuede.</i></p> <p>This warranty does not apply to:</p> <ul style="list-style-type: none">• Damage caused by a carrier other than the Seller.• Normal wear and tear or acts or omissions of parties other than Seller (including user modification, improper use or installation of Products).• COM or other third party materials applied to Products.• Products not installed by or under the auspices of a Knoll Dealer.• Dramatic temperature variations or exposure to unusual conditions.• Changes in surface finishes, including colorfastness due to aging or exposure to light.• Except as specifically noted above, textiles and upholstery supplied by KnollTextiles and Spinneybeck FilzFelt (consult current price lists for applicable warranties). <p>Natural variations occurring in wood, marble, and leather shall not be considered defects, and the Seller does not guarantee the colorfastness or matching of the colors, grains or textures, or surface hardness of such materials. The Seller also does not guarantee the colorfastness of fiberglass panel surfaces.</p> <p>THE EXPRESS WARRANTIES CONTAINED HEREIN ARE IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTIES OF MERCHANTABILITY AND FITNESS FOR PARTICULAR PURPOSE AND ALL OTHER WARRANTIES ARISING FROM COURSE OF DEALING OR USAGE OF TRADE.</p> <p>The remedies provided above are the Purchaser's sole remedies for any failure of Seller to comply with its obligations regarding the workmanship of its Products. Correction of any nonconformity in the manner and for the period of time provided shall constitute complete fulfillment of all liabilities of Seller, with respect to or arising out of the Product furnished hereunder.</p>
Delay/Force Majeure	<p>Seller shall not be liable for failure to perform or for delay in performance due to fire, flood, strike or other labor difficulty, act of God, act of war or terrorism, act of any governmental authority or of the Purchaser, riot, embargo, fuel or energy shortage, wrecks or delay in transportation, inability to obtain necessary labor, materials or manufacturing facilities from usual sources or failure of suppliers to meet their contractual obligations, or due to any cause beyond its reasonable control. If any such event occurs, Seller may extend delivery dates by a period of time necessary to overcome the effect of such delay, allocate available Product or cancel any purchase order.</p>
Compliance with Law	<p>PURCHASER IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL LAWS, ORDINANCES, REGULATIONS, RULES AND STANDARDS RELATING TO THE INSTALLATION, MAINTENANCE, USE AND OPERATION OF THE PRODUCTS.</p>
Patents	<p>Subject to the following provisions, Seller shall, at its own expense, defend or, at its option, settle any claim, suit or proceeding brought against the Purchaser, and/or its vendees, mediate and immediate, so far as based on an allegation that any Product or any part thereof furnished hereunder constitutes a direct or a contributory infringement of any claim of any patent of the United States or Canada. This obligation shall be effective only if Purchaser shall have made all payments then due hereunder and if Seller is notified promptly in writing and given authority, information and assistance for the defense of said claim, suit or proceeding. Seller shall pay all damages and costs awarded in such suit or proceedings so defended.</p> <p>The foregoing indemnity does not apply to the following:</p> <ul style="list-style-type: none">• Products supplied according to a design other than that of Seller, and which is required by the Purchaser.• Combination of the Product with another product not furnished hereunder unless Seller is a contributory infringer.• Any settlements of a suit or proceeding made without Seller's written consent.
Limitations of Liability	<p>SELLER, ITS CONTRACTORS, AUTHORIZED DEALERS AND SUBCONTRACTORS OR SUPPLIERS OF ANY TIER SHALL NOT BE LIABLE TO PURCHASER FOR ANY SPECIAL, INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING FROM A BREACH OF THIS AGREEMENT.</p> <p>Purchaser's remedies set forth herein are exclusive and the liability of Seller with respect to the breach of this agreement or any contract entered into between the parties pursuant hereto shall not exceed the price of the Product or part on which such liability is based.</p>

KnollKey Lock Program General Information

Following is the KnollKey lock policy, applicable to all products.

Knoll furniture can be ordered keyed-alike or random keyed. Key-alike and random keying instructions cannot be mixed on any single order. Only one of the two instructions can be used on an individual order. When an order is submitted with mixed (key-alike and random) instructions, Knoll will release the order as key-alike only and lock cores will have to be specified separately.

Key-alike

For the convenience of the user, furniture may be keyed alike at no charge. Write "Key-alike" in the description of your purchase order for any pedestal, overhead, file or other item you wish to have keyed alike.

Using the key-alike instructions, order cores and keys as line items on your purchase order. Do NOT submit a key-alike form. The Knoll East Greenville Lock Center will select key numbers from the standard range of K 001 - K 250. Key numbers will not be repeated unless over 250 sets are ordered. Lock cores keyed-alike will ship separately from the product, ready for field installation.

There is no charge for key-alike orders if placed with the furniture order.

IF THE KEY-ALIKE ORDER IS NOT PLACED AT LEAST TWO WEEKS PRIOR TO THE FURNITURE SHIP DATE, A \$50 HANDLING CHARGE AND AIR FREIGHT CHARGES WILL APPLY.

If product is ordered and shipped random-keyed, additional lock cores for key-alike are billable.

Random-Keying

To specify product keyed-random, write "key-random" in the product description. Random-keyed product is shipped with the lock core factory installed. A shrouded key is included. Random means no effort has been made to match key numbers, or to make them different.

Keys

A Knoll shrouded key is shipped with every lock core. 250 Key numbers are available. For numbers above 250, contact Custom Product Development. Additional keys and key blanks are available. See service parts for more information.

Master Keying

Knoll locks can be controlled by means of a master key. There is no additional per-lock charge for master keying. A letter of approval from the client must accompany orders for master keys.

Installing Lock Cores

Lock cores can be installed or removed in the field by using a change key. Cores must be in the unlocked position to be removed. See service parts for change key pattern number and pricing.

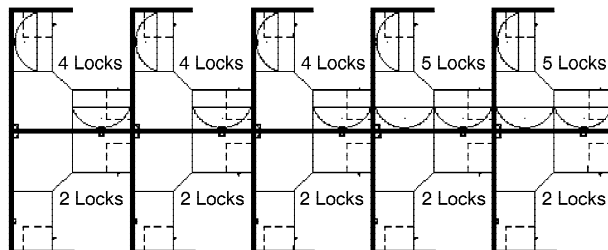
Lock Distribution

All orders for key-alike lock cores/keys are packaged and shipped from the East Greenville Lock Center, regardless of where the pedestals, overhead, or other units are produced. Random keyed product will have cores factory-installed.

How to Specify Key-Alike

Following is an example of how to specify key-alike for a cluster of 10 workstations.

Step 1 - Using the project floorplan, count the number of locks in each workstation.



Step 2 - Count the number of workstations with the same quantity of locks. Group together the workstations with a like number of locks.

5 workstations with 2 locks per station
3 workstations with 4 locks per station
2 workstations with 5 locks per station

Step 3 - For the first group (5 sets of 2 locks), enter the number of workstations in the quantity column.

Qty	Pattern #	Description	Unit List	Ext. List
5				

Step 4 - Then enter the pattern number "KSPEC_ _" and add a suffix for the number of locks for that group (i.e., for 2 locks per station, add the suffix "2"). Up to 30 lock cores are available in a set (i.e., KSPEC 30).

Qty	Pattern #	Description	Unit List	Ext. List
5	KSPEC 2	Set of 2 cores/keys	N / C	N / C

Step 5 - Repeat for other groups.

Qty	Pattern #	Description	Unit List	Ext. List
5	KSPEC 2	Set of 2 cores/keys	N / C	N / C
3	KSPEC 4	Set of 4 cores/keys	N / C	N / C
2	KSPEC 5	Set of 5 cores/keys	N / C	N / C

Your Key instructions are complete.

Knoll will select key numbers for each set from 250 available numbers. Additional key numbers are available through Custom Product Development. **For additions to existing installations, specify desired key numbers in the description.**

Service Parts

Pattern #	Description	List Price
KKEY_ _ _	Shrouded Key Specify key number desired	\$10
KBLANK	Shrouded Key Blank	\$10
KSPECB_ _ _	Retrofit Universal Core/Key Specify key number desired	\$22
KCHANGE	Change Key	\$10
HLKRKMASTER*	Master Key	\$10

*Note: A letter of approval on company letterhead from the client must accompany all orders for master keys.

General Ordering Information

The Products

This guide encompasses all standard products for this product group.

Sizes

Dimensions listed in this guide are indicated as:

H = height

W = width

D = depth

Dia. = diameter

Rad. = radius

Pricing

All prices shown are list.

How to Order

Select pattern numbers and quantities required for your complete installation. Product questions can be addressed in the specific sections of this guide or by contacting your sales representative or customer resource representative at 1-800-343-5665.

Next, select options (if required), along with colors and finishes appropriate to each product. Reference the Finishes and Fabrics pages for color designations.

On large installations, an item's "designated area" can be specified to assist in product organization and handling.

To expedite complete / correct entry of your order, be certain all pattern numbers, quantities, colors and area identifications are completely specified. Also, include complete purchase order numbers, bill-to and ship-to addresses, a contact name and specific factory shipping dates required.

Mail all orders to:

Knoll, Inc.
1235 Water Street
P.O. Box 157
East Greenville, PA 18041
Attention: Order Entry

Once your order is entered at Knoll, an acknowledgment will be mailed to you. You will be advised of your scheduled shipping date within five days of the original acknowledgment. If it is necessary to revise your order, please contact your customer resource representative.

Sustainability Statement

Sustainable design is a key component of Knoll's environmental focus. Our commitment to social responsibility and a healthy environment has prompted us to further articulate our longstanding environmental programs and, with encouragement and support from our colleagues in the industry, we have re-energized our focus on such "green" initiatives as life cycle analysis and LEED™ certification. Knoll is proud to have contributed to projects that have received LEED certification from the U.S. Green Building Council.

For the latest information on Knoll products that help our customers achieve LEED certification, log on to knoll.com, click on "About Knoll" and then "Environmental Focus."