

ACCESSORIES

Product Specifications	540
Product Options	543
Product Pages	544

POWER/DATA ELECTRICAL SPECIFICATIONS

ROUND GROMMET (G10)

- NACG10EL features 2 120 volt receptacles and 2 Cat5E data ports and 6' AC cord rated at 15 amps; data ports are not pre-wired
- Field installable
- For conference tables only
- Black nylon
- 8 adapter plates are provided

PIVOTING POWER GROMMET (MHO-B) (G12A, G12B, AND G12C)

- Field installable
- Silver, black, or white powder coat
- (G12A) 2 power outlets, 1 blank port and 1 dual USB-A port
- (G12B) 2 power outlets and 2 USB-A + C combo
- (G12C) 4 power outlets with 72" circuit breaker cord
- Must be ordered separately and installed in the field – top should be ordered with CUT-G12C option
- Hardwire available
- Specify model number only
- 6 ft. cord
- UL Listed

INTERLINK IQ PIVOTING POWER GROMMET (MHO-B) (G12A, G12B, AND G12C)

- Non-sequential "Daisy chain" solution
- Interlink IQ system can be used with training tables
- Interlink IQ system must begin with a smart box with starter plug (or full set)
- Jumper or transitional jumper used between the smart box and G12 IQ grommets when the span between grommet locations are greater than 60"
- Interlink IQ is plugged only. Hardwire is not available
- Built-in status indicator: green means go, red light indicates too many units
- UL recognized

DOUBLE PIVOTING M2X-B POWER GROMMET (G15A, G15B)

- Accommodates table thicknesses of ¾"-1¼"
- 1 touch door remains open during use
- 2 6 ft. power cords with 3-prong molded plug for each side
- Spill-proof
- Available in silver, black or white powder coat
- Hardwire/Chicago Code available
- Corded units (standard and hardwire) have 2 72" long power cords (1 for each side) rated at 15 amps 120 volts
- Grommet comes with undersurface wire managers attached underneath conference top
- Field installable into a CUT-G15 (must be ordered)
- UL Listed
- G15A SIDE 1: 2 power outlets, 1 dual USB-A port, 1 HDMI and 1 blank data port SIDE 2: 2 power outlets, 1 dual USB-A port, 1 VGA and 1 blank data port
- G15B SIDE 1: 2 power outlets, 1 blank data port, 1 HDMI, and 1 USB A + C combo SIDE 2: 2 power outlets, 1 blank data port, 1 VGA and 1 USB-A + C combo

INTERLINK IQ DOUBLE PIVOTING M2X-B POWER GROMMET (G15A, G15B)

- Non-sequential "Daisy chain" solution
- Interlink IQ system must begin with a smart box with starter plug (or full set)
- 1 touch door remains open during use
- Maximum of 4 units because G15 is double sided (F8)
- Two G15 units connected together will span 77½" from center of grommet 1 to center of grommet 2.
- Two G15 units connected together with 1 60" jumper will span 135½" from center of grommet 1 to center of grommet 2.
- Interlink IQ is plugged only. Hardwire is not available
- Built-in status indicator: green means go, red light indicates too many units
- UL recognized
- G15A Interlink has SIDE 1: 2 power outlets, 1 dual USB-A port, 1 HDMI and 1 blank data port SIDE 2: 2 power outlets, 1 dual USB-A port, 1 VGA and 1 blank data port
- G15B Interlink has SIDE 1: 2 power outlets, 1 blank data port, 1 HDMI, and 1 USB-A + C combo SIDE 2: 2 power outlets, 1 blank data port, 1 VGA and 1 USB-A + C combo

TRANSITIONAL JUMPER

- Jumper used to connect an older IQ version and new IQ system (as of November 2019)

POWER/DATA OASIS (G162)

- To be ordered with G16 cutout options
- Must be inserted and installed into cutouts in field
- Fits into CUT-G16C, CUT-G16E, CUT-G16LR, CUT-G16A, and CUT-G16CE options
- Silver or black powder coat
- The Power/Data Oasis may be utilized with any wire access base; however, for the cleanest aesthetic, specify the panel base kit
- Power/Data Oasis (G162) unit will feature 6 power receptacles with 2 108" power cords and molded plugs rated at 12 amps 120 volts, 2 charging USB (2.1); 1 HDMI; 1 VGA with mini stereo, and 1 RJ45 data jack
- Power/Data Oasis hardwire unit (G162) will feature 6 power receptacles with 1 72" long hardwire conduit covered pigtail cable on 1 end which carries 2 20 amp 120 volt circuits to power 2 sides of the Power/Data Oasis, 2 charging USB (2.1); 1 HDMI; 1 VGA with mini stereo, and 1 RJ45 data jack. Not Chicago Code
- Hardwire/Chicago Code available
- Standard units have cords that are 9 ft. long rated at 15 amps 120 volts and molded plug. Hardwire units have cords that are 6 ft. long rated at 20 amps 120 volts and molded plug
- Cannot be field scribed for cutout
- UL Listed
- For more specification information: www.electri-cable.com

GLENBEIGH PIVOTING POWER GROMMET (G17A, G17B, G17C)

- Accommodates table thickness of ¾"-1¼"
- 10 ft. power cord with 3-prong molded plug
- Spill-proof
- Available in silver, black or white powder coat
- Hardwire/Chicago Code available
- 15 amp, 120v (hardwire models)
- 10 ft. metal conduit (hardwire models)
- UL Listed
- G17A available with 2 power outlets
- G17B available with 1 power outlet and 1 USB-A + C combo port
- G17C available with 1 power outlet

INTERLINK IQ SYSTEM (G17A, G17B, G17C)

- Non-sequential "Daisy chain" solution
- Interlink IQ system must begin with a smart box with starter plug (or full set)
- Jumper or transitional jumper used between the smart box and G17 IQ grommets when the span between grommet locations are greater than 60"
- Interlink IQ is plugged only. Hardwire is not available
- Built-in status indicator: green means go, red light indicates too many units
- UL recognized
- G17A Interlink has 2 power outlets
- G17B Interlink has 1 power and 1 dual USB-A + C combo
- G17C Interlink has 1 power outlet

POWER GROMMET (G23)

- Field installable when CUT-G23 option is specified
- Die-cast zinc in black or silver powder coat
- Includes 2 power outlets and 2 power USB ports
- Silver, black, or white
- Hardwire available
- 9 foot, 15 amp cord
- UL Listed

DAISY LINK (G23)

- Field installable when CUT-G23 option is specified
- Silver, black, or white
- Includes 2 15 amp power receptacles (no data) and 2 USB (3.0 power) power ports
- Thumbscrew version with 2 backerplates and 2¼"-20 thumbscrews
- 72" single circuit power cord for plugged starter unit; 48¾" conduit and 24" power cord with 20 amp molded plug
- 72¾" multi-circuit conduit power cord for hardwire starter unit
- Add-on unit does include a 60" jumper; jumper cable is 60¾" metal conduit with female to female ends for connecting 2 daisy link power grommets
- UL Listed

DAISY LINK JUMPER

- 80", 180", or 240" jumper cable is metal conduit with female to female ends to connect 2 daisy link power grommets when the power is jumped between tables

MARINA™ HDMI COLLABORATIVE MEETING TECHNOLOGY SOLUTION (G26)

- UL Listed
- Must be inserted and installed into CUT-G26C cutout in field
- HDMI switcher
- 4 HDMI Show Me cables, 6 ft.
- 15 ft. HDMI video output cord
- 4 15 amp power receptacles
- 4 3.0, 2.1 amp USB ports
- 2 blank telecom plates
- 108" power cord
- Graphite Gray powder coat interior
- Powder coat bezel with sliding doors; available in silver or black
- For more specification information: www.electri-cable.com

NODE POWER GROMMET (G33)

- For use with select Maneuver tables
- Available in black, silver, or white powder coat
- Contains 1 electrical outlet and 2 USB-A ports
- 72" 15 amp power cord included
- Maximum worksurface thickness is 1½"
- UL approved
- Tamper resistant
- Spill-proof

POWER TOWER

- Available in gloss black or silver with black faceplates, or gloss white with white faceplates
- Unit comes with (12) 15 amp 120 volt, tamper resistant receptacles and (6) USB 3.0 power charging ports that provide 2.1 amps. Data ports are not provided
- 108" 15 amp power cord included
- Circuit breaker located in the bottom of the tower for overload protection
- 6 rubber feet prevent sliding and provide ¾" floor clearance
- Tri-core design allows for 360° power access
- 3 slots in the base provide an anchor for tethering the unit to the floor or pole if stationary application is desired

UNDERSURFACE POWER/DATA

- Contains 1 electrical outlet and 2 USB ports
- Mounts under surface
- 72" power cord included

MOIRÉ POWER CENTER (G10A, G10B)

- Installs into round G10 (3" dia.) worksurface grommet
- Adjusts to worksurfaces thickness of 1⅞"-1⅝"
- Available in light grey, black, or white
- Spill-proof
- 6' power cord with 3-prong molded plug (15 amp)
- UL Listed
- (G10A) 2 power outlets and 2 USB-A dual ports
- (G10B) 4 power outlets

VESTA

- Available in white with light grey accents or black with dark grey accents
- 3 USB-A ports (2 amp), and 1 USB-C port (18w)
- 3.2v, 40 amp hour lithium battery; 128 wh (watt hour) capacity
- For optimal use, unit should be charged every night
- Includes 6 ft. charging cord (12 volts, 3 amps)
- UL Listed
- Vesta models have a Lithium battery and MUST ship separately via Fed Ex Ground

AXIL BLUETOOTH POWER CENTER

- Freestanding, portable desktop outlet with 1 Bluetooth speaker (with stainless steel grille), 1 power outlet and 1 USB-A port
- Spill-proof
- Available in white, silver and black powder coat
- 6 ft power cord with 3-prong molded plug (15 amp)
- UL Listed

DEAN POWER CENTER

- Mounts to the edge of a worksurface with no table cut outs or installation required
- Adjusts to worksurface thickness up to 2¼"
- Molded plastic faceplate with an anodized aluminum housing
- Available in light grey, black, and white
- Spill-proof
- 6' power cord with 3-prong molded plug (15 amp)
- UL Listed
- Available with 2 power
- Available with 1 power, 1 dual USB-A dual port
- Available with 3 power
- Available with 2 power, 1 USB-A + C combo, 2 power, and 1 USB-A dual port

BURELÉ POWER CENTER

- Mounts to the edge of a worksurface with no table cut outs or installation required
- Adjusts to worksurfaces from ¼"-2¾"
- Available in light grey, black or white
- Spill-proof
- 6' power cord with 3-prong molded plug (15 amp)
- UL Listed
- Available with 2 power, 1 dual USB-A port, 1 USB-C port
- Available with 4 power

HITCH

- Freestanding, portable charging center
- Available in light grey, black, or white
- 20w power supply
- Battery: 3.6v, 11.6ah (amp hours), 41.76 wh (watt hours)
- Dead to full charge time is 4½ hours
- 6' charging cord is 5 volts at 4 amps
- Cannot charge devices while unit is being charged
- Display light indicates full charge
- UL Listed
- Hitch models have a Lithium battery and MUST ship separately via Fed Ex Ground

4-TRAC

- Used as a power distribution in conjunction with our electrical grommet options
- 4 wires, 2 circuits, 20 amps each (circuit 1 and 2 only)
- 13 duplex receptacles per circuit (26) 15 amp duplex
- UL Listed as a manufactured wiring system
- Ease of install and reconfigure options
- Field installable

GARCIA

- Mounts to the undersurface of a worksurface
- Available in Black, White, and Fog
- Includes a 72" cord
- Available with 2 USB-A
- Available with 1 USB-A, 1 USB-C
- UL Listed

ACCESSORIES

TULLY

- Features a long tail that bends and wraps around cushions for stability; tucks in between the cushions and arms of chairs
- Available in Black, White, and Fog
- Includes a 120" cord
- Available with 1 Power, 1 USB-A, 1 USB-C
- Tamper Resistant
- UL Listed

TRIPPEL

- Set on surface
- Available in Black, White, and Fog
- Includes a 108" cord
- Available with 2 power, 2 USB-A
- Features Qi Wireless Charging which will work with the following:
 - Apple iPhone 8, 8 Plus, X
 - Samsung Galaxy S9, S9+, Note 5, Note 8, S8, S8+, S7, S7 Active, S7 Edge, S6, S6 Edge
 - Lg V30, G6 (US version only), G4 (optional), G3 (optional)
 - Microsoft Lumia 1520, 1020, 930, 929, 928, 920
 - Google Nexus 4, 5, 6, 7 (2013)
 - BlackBerry Pov Z30
- UL Listed

WILLOW

- Set on surface
- Available in Beech with a Teal cord, Walnut with a Black cord, or Black with a Black cord
- Includes a 108" cord
- Available with 1 power, 1 USB-A
- Tamper resistant
- UL listed

POWER STRIP

- Available in Black
- Includes a 120" cord
- Available with 6 power
- UL Listed

HEARTH

- Birdhouse shaped power supply with 1 Power and 1 Dual USB-A
- Handmolded concrete body with a wood base detail
- 108" solid brass braided cord
- UL Listed

APPARATUS

- Set on surface
- Available in Flat black with a black braided cord, and matte white with a white braided cord
- 108" cord
- 1 Power and 1 Dual USB-A
- Manufactured with sturdy cast aluminum
- ETL Listed

SIDEKICK

- Felt sofa arm overlay
- Heather Gray unit features power and a braided cord in Poppy. Camel unit features a power and braided cord in Dusk
- 108" cord
- Features a felt pocket to store items while charging
- ETL and UL Listed

ASHLEY DUO


- Includes 2 power, 2 USB
- 72" cord
- Must have at least 5.5" of clearance under surface at point of application to be able to mount
- Ashley Surface Clamp Mount models are only compatible with standard flat rim profile worksurfaces thicknesses between ½" (12.7mm) – 2¼" (71mm).
- UL Listed

TACK BOARD FABRIC OPTIONS

Dune (Grade A) 100% Polyester		Repetition (Grade A) 100% Pre-Consumer Recycled Polyester		Pact (Grade B) 65% Pre-Consumer Recycled Polyester, 35% Post-Consumer Recycled Polyester	
8600	Drift	3700	Ash	25401	Aloe
8601	Windblown	3703	White	25402	Azure
8602	Erosion	3705	Willow	25403	Calla
8603	Haze	3709	Java	25404	Coastal
8604	Kamelos	3713	Stainless	25405	Delft
8606	Pebble	3715	Almond	25406	Dove
8607	Gecho	3721	Reed	25407	Dragon
8608	Nectar	3744	Tawny	25408	Eureka
8610	Clear Sky	3775	Grey Green	25409	Fern
8614	Basin			25410	Harbour
8615	Raven			25411	Lily
8620	Darkness			25412	Lime
8621	Golden				
		COM (Grade B)		25413	Midnight
				25414	Nectar
				25415	Patina
				25416	Putty
				25417	Roast
				25418	Roma
				25419	Rubine
				25420	Sketch
				25421	Tanzanite
				25422	Taupe
				25423	Toasty

RAILROADED TACK BOARD

- Shaded rectangle portrays a railroaded privacy/modesty screen.



DIMENSION KEY

D	Depth
W	Width
H	Height
A	Overhang: Approach Side
KW	Kneespace Width









Shaded model numbers are available on our "To You in 10 Days or Less" Quick Delivery program and will be delivered in 10 days or less.

TO ORDER, SPECIFY:

1. Model Number

SAMPLE MODEL NUMBER:

NAC18TLDBPUS

	MODEL NO./DESCRIPTION	LIST PRICE	D	W	H	A	KW	CARTONED WEIGHT	CUBIC FEET
ELEMENT LED DESKTOP LIGHT 	NAC18TLDBPUS Task Light w/Desktop Base, Plug/USB, Silver	\$ 1024	14	—	14	—	—	3 lbs.	0.7
	<ul style="list-style-type: none"> • Available in silver • MCX LED freestanding light • Working height 18" and maximum reach 28" • 360° swivel from base, 135° front-to-back head tilt, 90° side-to-side head rotation • 1 120VAC 3 prong receptacle electrical outlet • 7 levels of light adjustment • 2 USB charging ports providing 1 amp 5VDC of power 								
PIPER LINEAR LED DESKTOP LIGHT 	NAC18TLDBUH Task Light w/Desktop Base, USB, White	\$ 573	11½	7½	18¼	—	—	10 lbs.	1.2
	<ul style="list-style-type: none"> • Available in white • LED freestanding light • 3 color temps, dimming • 1 USB charging port that provides 5 volts and 1 amp of charging power • 4'11" white cord plus a 3' cord extender • UL Listed 								
REVO DESKTOP LIGHT 	NAC1406TLDB1S Silver	\$ 537			14¾	—	—	8.31 lbs.	1.82
	NAC1406TLDB1B Black	537			14¾	—	—	8.31 lbs.	1.82
	NAC1406TLDB1W White	537			14¾	—	—	8.31 lbs.	1.82
	<ul style="list-style-type: none"> • 108" power cord • ETL Listed 								
VOYAGE DESKTOP LIGHT 	NAC1408TLDB1S Silver	\$ 537			14¾	—	—	8.31 lbs.	1.82
	NAC1408TLDB1B Black	537			14¾	—	—	8.31 lbs.	1.82
	NAC1408TLDB1W White	537			14¾	—	—	8.31 lbs.	1.82
	<ul style="list-style-type: none"> • 108" power cord • ETL Listed 								
CONVENIENCE OUTLET 	NAC0902EL5C Black	\$ 223	13	22	1¾	—	—	2 lbs.	0.3
	<ul style="list-style-type: none"> • 5 grounded electrical receptacles • 1 telephone jack with 14 ft. cord • 10 ft. power cord • Includes remote on/off power switch • Black housing and cords • UL Listed 								
POWER TOWER 	NAC25ELPTB Black	\$ 2317	16¼	16¾	25½	—	—	68 lbs.	6.5
	NAC25ELPTH White	2317	16¼	16¾	25½	—	—	68 lbs.	6.5
	NAC25ELPTS Silver	2317	16¼	16¾	25½	—	—	68 lbs.	6.5
	<ul style="list-style-type: none"> • Available in gloss black or silver with black faceplates, or gloss white with white faceplates • Unit comes with (12) 15 amp 120 volt, tamper resistant receptacles and (6) USB 3.0 power charging ports that provide 2.1 amps. Data ports are not provided • 108" 15 amp power cord included • Circuit breaker located in the bottom of the tower for overload protection • 6 rubber feet prevent sliding and provide ¾" floor clearance • Tri-core design allows for 360° power access • 3 slots in the base provide an anchor for tethering the unit to the floor or pole if stationary application is desired 								

ACCESSORIES



Shaded model numbers are available on our "To You in 10 Days or Less" Quick Delivery program and will be delivered in 10 days or less.

TO ORDER, SPECIFY:


1. Model Number

SAMPLE MODEL NUMBER:

NACG10EL


	MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
			D	W	H	A	KW		

ROUND GROMMET (G10)



NACG10EL	Electrical Grommet	\$ 469	4 1/4"	4 1/4"	5"	—	—	2 lbs.	0.12
NACG10	Grommet	76	4 1/4"	4 1/4"	1 1/4"	—	—	1 lbs.	0.12


MOIRÉ, G10 POWER/USB GROMMET



NACG10AELPGB	Black	\$ 439				—	—	1.7 lbs.	0.24
NACG10AELPGW	White	439				—	—	1.7 lbs.	0.24
NACG10AELPGG	Light Grey	439				—	—	1.7 lbs.	0.24

- 2 power, 2 dual USB-A, 2.0 amps
- Black cord on black and light grey, white cord on white, 6 ft, 15 amp plugged cord
- Fits in G10 grommet hole diameter 3"
- Adjust to thickness from 1 3/16" - 1 1/8"
- UL Listed

MOIRÉ, G10 POWER GROMMET



NACG10BELPGB	Black	\$ 281				—	—	1.7 lbs.	0.24
NACG10BELPGW	White	281				—	—	1.7 lbs.	0.24
NACG10BELPGG	Light Grey	281				—	—	1.7 lbs.	0.24

- 4 power
- Black, 6 ft, 15 amp plugged cord with built in circuit breaker
- Black cord on black and light grey, white cord on white
- Fits in G10 grommet hole diameter 3"
- Adjust to thickness from 1 3/16" - 1 1/8"
- UL Listed

TO ORDER, SPECIFY:

1. Model Number

SAMPLE MODEL NUMBER:

NACG12AELPGB

**PIVOTING POWER GROMMET
(MHO-B) (G12A)**

NACG12AELPGB

MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
		D	W	H	A	KW		
NACG12AELPGB Black	\$ 609	4%	8%	1½	—	—	2 lbs.	0.2
NACG12AELPGS Silver	609	4%	8%	1½	—	—	2 lbs.	0.2
NACG12AELPGW White	609	4%	8%	1½	—	—	2 lbs.	0.2
NACG12AELPG1B Braided Cord, Black	\$ 664	4%	8%	1½	—	—	2 lbs.	0.2
NACG12AELPG1S Braided Cord, Silver	664	4%	8%	1½	—	—	2 lbs.	0.2
NACG12AELPG1W Braided Cord, White	664	4%	8%	1½	—	—	2 lbs.	0.2
NACG12AELHCB Hardwire, Black	\$ 609	4%	8%	1½	—	—	3 lbs.	0.2
NACG12AELHCS Hardwire, Silver	609	4%	8%	1½	—	—	3 lbs.	0.2
NACG12AELHCW Hardwire, White	609	4%	8%	1½	—	—	3 lbs.	0.2

- 2 power outlets, 1 dual USB-A port, and 1 blank port
- Units are powder coated

**PIVOTING POWER GROMMET
(MHO-B) (G12B)**

NACG12BELPGB

NACG12BELPGB Black	\$ 652	4%	8%	1½	—	—	2 lbs.	0.2
NACG12BELPGS Silver	652	4%	8%	1½	—	—	2 lbs.	0.2
NACG12BELPGW White	652	4%	8%	1½	—	—	2 lbs.	0.2
NACG12BELPG1B Braided Cord, Black	\$ 706	4%	8%	1½	—	—	2 lbs.	0.2
NACG12BELPG1S Braided Cord, Silver	706	4%	8%	1½	—	—	2 lbs.	0.2
NACG12BELPG1W Braided Cord, White	706	4%	8%	1½	—	—	2 lbs.	0.2
NACG12BELHCB Hardwire, Black	\$ 652	4%	8%	1½	—	—	3 lbs.	0.2
NACG12BELHCS Hardwire, Silver	652	4%	8%	1½	—	—	3 lbs.	0.2
NACG12BELHCW Hardwire, White	652	4%	8%	1½	—	—	3 lbs.	0.2

- 2 power outlets and 2 USB-A + C ports
- Units are powder coated

**PIVOTING POWER GROMMET
(MHO-B) (G12C)**

NACG12CELPGB

NACG12CELPGB Black	\$ 451	4%	8%	1½	—	—	2 lbs.	0.2
NACG12CELPGS Silver	451	4%	8%	1½	—	—	2 lbs.	0.2
NACG12CELPGW White	451	4%	8%	1½	—	—	2 lbs.	0.2
NACG12CELPG1B Braided Cord, Black	\$ 505	4%	8%	1½	—	—	2 lbs.	0.2
NACG12CELPG1S Braided Cord, Silver	505	4%	8%	1½	—	—	2 lbs.	0.2
NACG12CELPG1W Braided Cord, White	505	4%	8%	1½	—	—	2 lbs.	0.2
NACG12CELHCB Hardwire, Black	\$ 451	4%	8%	1½	—	—	3 lbs.	0.2
NACG12CELHCS Hardwire, Silver	451	4%	8%	1½	—	—	3 lbs.	0.2
NACG12CELHCW Hardwire, White	451	4%	8%	1½	—	—	3 lbs.	0.2

- 4 power outlets with 72" circuit breaker cord
- Units are powder coated

ACCESSORIES


TO ORDER, SPECIFY:

1. Model Number


SAMPLE MODEL NUMBER:

NACG12AELPD2IQKB


INTERLINK IQ SYSTEM (G12A)




NACG12AELPD2IQKS




NACG12AELPD2IQB



NACEL2IQBB



NACEL2IQ60J



NACEL2IQ60TJ

MODEL NO./DESCRIPTION

FULL SET OF 8 UNITS

NACG12AELPD2IQKB	Set of 8, Black	\$ 5243
NACG12AELPD2IQKS	Set of 8, Silver	5243
NACG12AELPD2IQKW	Set of 8, White	5243

- Full sets include 8 grommets and smart box with starter plug

LIST PRICE

DIMENSIONS

D W H A KW

CARTONED CUBIC WEIGHT FEET

4%	8%	1½	—	—	25 lbs.	4.0
4%	8%	1½	—	—	25 lbs.	4.0
4%	8%	1½	—	—	25 lbs.	4.0

INTERLINK GROMMETS

NACG12AELPD2IQB	Interlink Grommet, Black	\$ 593
NACG12AELPD2IQS	Interlink Grommet, Silver	593
NACG12AELPD2IQW	Interlink Grommet, White	593

4%	8%	1½	—	—	3 lbs.	3.0
4%	8%	1½	—	—	3 lbs.	3.0
4%	8%	1½	—	—	3 lbs.	3.0

- Each power grommet includes 2 power outlets, 1 port with dual USB-A, and 1 blank port that can accommodate 1 of 8 provided adapter plates
- Non-sequential "Daisy chain" solution for flip/nest training tables
- When Interlink solution is ordered, flip/nest training table must specify CUT-G12C grommet
- When Interlink solution is ordered, use table ganging brackets
- Specify model number only
- Interlink cord with plug is 120" in length
- Length of cord from coupler to unit on all units is 14"
- Length from coupler to coupler is 60"
- Units are powder coated
- Must order smart box with plug separately

INTERLINK IQ SMART BOX AND JUMPER

NACEL2IQBB	Interlink IQ smart box w/starter plug	\$ 536
NACEL2IQ60J	Interlink IQ Jumper-60"	119
NACEL2IQ60TJ	Transitional Jumper	125

—	120	—	—	—	3 lbs.	0.15
—	60	—	—	—	3 lbs.	0.15
—	60	—	—	—	3 lbs.	0.15

- Must order smart box with plug separately
- UL Recognized
- Non-sequential "Daisy chain" solution
- Interlink IQ system must begin with a smart box with plug (or full set)
- Jumper used between the smart box with plug and grommets when the span between grommet locations are greater than 60"
- Transitional jumper (connections on both ends) used only when using an older IQ model and a new IQ model (as of November 2019)
- Jumpers count as one connection (maximum of 8)
- The Interlink IQ system is ONLY plugged. This system cannot be hardwired
- Units are powder coated
- Built-in status indicator: green means go, red light indicates too many units
- See charts on pages 558-559

TO ORDER, SPECIFY:


1. Model Number

SAMPLE MODEL NUMBER:

NACG12BELPD2IQKB

MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
		D	W	H	A	KW		

INTERLINK IQ SYSTEM (G12B)




NACG12BELPD2IQKS

FULL SET OF 8 UNITS

NACG12BELPD2IQKB	Set of 8, Black	\$ 5861	4%	8%	1½	—	—	25 lbs.	4.0
NACG12BELPD2IQKS	Set of 8, Silver	5861	4%	8%	1½	—	—	25 lbs.	4.0
NACG12BELPD2IQKW	Set of 8, White	5861	4%	8%	1½	—	—	25 lbs.	4.0

- Full sets include 8 grommets and smart box with starter plug




NACG12BELPD2IQB


INTERLINK GROMMETS

NACG12BELPD2IQB	Interlink Grommet, Black	\$ 639	4%	8%	1½	—	—	3 lbs.	3.0
NACG12BELPD2IQS	Interlink Grommet, Silver	639	4%	8%	1½	—	—	3 lbs.	3.0
NACG12BELPD2IQW	Interlink Grommet, White	639	4%	8%	1½	—	—	3 lbs.	3.0


- Each power grommet includes 2 power outlets and 2 charging USB-A + C ports
- Non-sequential "Daisy chain" solution for flip/nest training tables
- When Interlink solution is ordered, flip/nest training table must specify CUT-G12C grommet
- When Interlink solution is ordered, use table ganging brackets
- Specify model number only
- Interlink cord with plug is 120" in length
- Length of cord from coupler to unit on all units is 14"
- Length from coupler to coupler is 60"
- Units are powder coated
- Must order smart box with plug separately



NACEL2IQBB



NACEL2IQ60J



NACEL2IQ60TJ

INTERLINK IQ SMART BOX AND JUMPER

NACEL2IQBB	Interlink IQ smart box w/starter plug	\$ 536	—	120	—	—	—	3 lbs.	0.15
NACEL2IQ60J	Interlink IQ Jumper-60"	119	—	60	—	—	—	3 lbs.	0.15
NACEL2IQ60TJ	Transitional Jumper	125	—	60	—	—	—	3 lbs.	0.15

- Must order smart box with plug separately
- UL Recognized
- Non-sequential "Daisy chain" solution
- Interlink IQ system must begin with a smart box with plug (or full set)
- Jumper used between the smart box with plug and grommets when the span between grommet locations are greater than 60"
- Transitional jumper (connections on both ends) used only when using an older IQ model and a new IQ model (as of November 2019)
- Jumpers count as one connection (maximum of 8)
- The Interlink IQ system is ONLY plugged. This system cannot be hardwired
- Units are powder coated
- Built-in status indicator: green means go, red light indicates too many units
- See charts on pages 558-559

ACCESSORIES


TO ORDER, SPECIFY:

1. Model Number

SAMPLE MODEL NUMBER:

NACG15AELPGB

1 TOUCH DOUBLE PIVOTING POWER GROMMET (M2X-B) (G15A)




NACG15AELPGS

MODEL NO./DESCRIPTION		LIST PRICE	DIMENSIONS				CARTONED CUBIC	
			D	W	H	A	WEIGHT	FEET
NACG15AELPGB	Black	\$ 1414	8	9¼	1½	—	5 lbs.	0.4
NACG15AELPGS	Silver	1414	8	9¼	1½	—	5 lbs.	0.4
NACG15AELPGW	White	1414	8	9¼	1½	—	5 lbs.	0.4
NACG15AELHCB	Black/Hardwire	\$ 1414	8	9¼	1½	—	5 lbs.	0.4
NACG15AELHCS	Silver/Hardwire	1414	8	9¼	1½	—	5 lbs.	0.4
NACG15AELHCW	White/Hardwire	1414	8	9¼	1½	—	5 lbs.	0.4

- See pages 540-542 for detailed specifications
- Units are powder coated
- Side 1: 2 power, 1 dual USB-A, 1 HDMI, and 1 blank
- Side 2: 2 power, 1 dual USB-A, 1 VGA, and 1 blank
- Units include 2 72" long cords (1 for each side)

1 TOUCH DOUBLE PIVOTING POWER GROMMET (M2X-B) (G15B)



NACG15BELPGB

NACG15BELPGB	Black	\$ 1572	8	9¼	1½	—	5 lbs.	0.4
NACG15BELPGS	Silver	1572	8	9¼	1½	—	5 lbs.	0.4
NACG15BELPGW	White	1572	8	9¼	1½	—	5 lbs.	0.4
NACG15BELHCB	Black/Hardwire	\$ 1572	8	9¼	1½	—	5 lbs.	0.4
NACG15BELHCS	Silver/Hardwire	1572	8	9¼	1½	—	5 lbs.	0.4
NACG15BELHCW	White/Hardwire	1572	8	9¼	1½	—	5 lbs.	0.4







- See pages 540-542 for detailed specifications
- Units are powder coated
- Side 1: 2 power, 1 dual USB-A + C, 1 HDMI, and 1 blank
- Side 2: 2 power, 1 dual USB-A + C, 1 VGA, and 1 blank
- Units include 2 72" long cords (1 for each side)

TO ORDER, SPECIFY:

1. Model Number

SAMPLE MODEL NUMBER:

NACG15AELPD2IQKB

	MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
INTERLINK IQ SYSTEM (M2X-B) (G15A)  NACG15AELPD2IQKS  SIDE 1  SIDE 2 NACG15AELPD2IQB  NACEL2IQBB  NACEL2IQ60J  NACEL2IQ60TJ	FULL SET OF 4 UNITS								
	NACG15AELPD2IQKB Set of 4, Black	\$ 5624	8	9¾	1½	—	—	20 lbs.	3.2
	NACG15AELPD2IQKS Set of 4, Silver	5624	8	9¾	1½	—	—	20 lbs.	3.2
	NACG15AELPD2IQKW Set of 4, White	5624	8	9¾	1½	—	—	20 lbs.	3.2
• Full sets include 4 grommets and smart box with starter plug									
INTERLINK GROMMETS									
	NACG15AELPD2IQB Interlink Grommet, Black	\$ 1254	8	9¾	1½	—	—	5 lbs.	0.4
	NACG15AELPD2IQS Interlink Grommet, Silver	1254	8	9¾	1½	—	—	5 lbs.	0.4
	NACG15AELPD2IQW Interlink Grommet, White	1254	8	9¾	1½	—	—	5 lbs.	0.4
• Units are powder coated • Interlink IQ full set is a set of 4 (8 total sides) • Maximum is 4 units • Side 1: 2 power, 1 dual USB-A, 1 HDMI, and 1 blank • Side 2: 2 power, 1 dual USB-A, 1 VGA, and 1 blank • Must order smart box with plug separately									
INTERLINK IQ SMART BOX AND JUMPER									
	NACEL2IQBB Interlink IQ smart box w/starter plug	\$ 536	—	120	—	—	—	3 lbs.	0.15
	NACEL2IQ60J Interlink IQ Jumper-60"	119	—	60	—	—	—	3 lbs.	0.15
	NACEL2IQ60TJ Transitional Jumper	125	—	60	—	—	—	3 lbs.	0.15
• Must order smart box with plug separately • UL Recognized • Non-sequential "Daisy chain" solution • Interlink IQ system must begin with a smart box with plug (or full set) • 1 touch door remains open during use • Jumper used between the smart box with plug and grommets when the span between grommet locations are greater than 60" • Transitional jumper (connections on both ends) used only when using an older IQ model and a new IQ model (as of November 2019) • Jumpers count as one connection (maximum of 4) • The Interlink IQ system is ONLY plugged. This system cannot be hardwired • Units are powder coated • Built-in status indicator: green means go, red light indicates too many units • See charts on pages 558-559									

ACCESSORIES

TO ORDER, SPECIFY:

1. Model Number

SAMPLE MODEL NUMBER:

NACG15BELPD2IQKB


MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS					CARTONED CUBIC	
		D	W	H	A	KW	WEIGHT	FEET
INTERLINK IQ SYSTEM (M2X-B) (G15B)	FULL SET OF 4 UNITS							
NACG15BELPD2IQKB Set of 4, Black	\$ 5895	8	9¼	1½	—	—	20 lbs.	3.2
NACG15BELPD2IQKS Set of 4, Silver	5895	8	9¼	1½	—	—	20 lbs.	3.2
NACG15BELPD2IQKW Set of 4, White	5895	8	9¼	1½	—	—	20 lbs.	3.2

• Full sets include 4 grommets and smart box with starter plug


INTERLINK GROMMETS

NACG15BELPD2IQB Interlink Grommet, Black	\$ 1411	8	9¼	1½	—	—	5 lbs.	0.4
NACG15BELPD2IQS Interlink Grommet, Silver	1411	8	9¼	1½	—	—	5 lbs.	0.4
NACG15BELPD2IQW Interlink Grommet, White	1411	8	9¼	1½	—	—	5 lbs.	0.4


- Units are powder coated
- Side 1: 2 power, 1 dual USB-A + C, 1 HDMI, and 1 blank
- Side 2: 2 power, 1 dual USB-A + C, 1 VGA, and 1 blank
- 1 touch door remains open during use
- Interlink IQ full set is a set of 4 (8 total sides)
- Maximum is 4 units
- Must order smart box with plug separately



NACG15BELPD2IQKS




SIDE 1




SIDE 2


NACG15BELPD2IQB



NACEL2IQBB



NACEL2IQ60J



NACEL2IQ60TJ

INTERLINK IQ SMART BOX AND JUMPER

NACEL2IQBB Interlink IQ smart box w/starter plug	\$ 536	—	120	—	—	—	3 lbs.	0.15
NACEL2IQ60J Interlink IQ Jumper-60"	119	—	60	—	—	—	3 lbs.	0.15
NACEL2IQ60TJ Transitional Jumper	125	—	60	—	—	—	3 lbs.	0.15

- Must order smart box with plug separately
- UL Recognized
- Non-sequential "Daisy chain" solution
- Interlink IQ system must begin with a smart box with plug (or full set)
- 1 touch door remains open during use
- Jumper used between the smart box with plug and grommets when the span between grommet locations are greater than 60"
- Transitional jumper (connections on both ends) used only when using an older IQ model and a new IQ model (as of November 2019)
- Jumpers count as one connection (maximum of 4)
- The Interlink IQ system is ONLY plugged. This system cannot be hardwired
- Units are powder coated
- Built-in status indicator: green means go, red light indicates too many units
- See charts on pages 558-559


TO ORDER, SPECIFY:

1. Model Number

SAMPLE MODEL NUMBER:

NACG162ELB


POWER/DATA OASIS (G162)



MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
		D	W	H	A	KW		
NACG162ELB Black	\$ 2581	9	15	4	—	—	8 lbs.	1.2
NACG162ELS Silver	2581	9	15	4	—	—	8 lbs.	1.2
NACG162ELHB Black/Hardwire/Modular Connect	\$ 3012	9	15	4	—	—	8 lbs.	1.2
NACG162ELHS Silver/Hardwire/Modular Connect	3012	9	15	4	—	—	8 lbs.	1.2
NACG162ELHCB Black/Hardwire	\$ 3012	9	15	4	—	—	8 lbs.	1.2
NACG162ELHCS Silver/Hardwire	3012	9	15	4	—	—	8 lbs.	1.2

- See pages 540-542 for detailed specifications
- The Power/Data Oasis may be utilized with any wire access base; however, for the cleanest aesthetic, specify the panel base kit
- Units are powder coated
- Modular connect does not meet city code

HARDWIRE POWER/DATA OASIS
DAISY CHAIN KITS (G16)



SILVER POWDER COAT	BLACK POWDER COAT							
NACG162ELHS120LR	NACG162ELHB120LR	\$ 6146	9	15	4	—	—	41 lbs. 5.4
NACG162ELHS144LR	NACG162ELHB144LR	6146	9	15	4	—	—	42 lbs. 5.4
NACG162ELHS168LR	NACG162ELHB168LR	6146	9	15	4	—	—	42 lbs. 5.4
NACG162ELHS168A	NACG162ELHB168A	9556	9	15	4	—	—	50 lbs. 6.7
NACG162ELHS168CE	NACG162ELHB168CE	6146	9	15	4	—	—	41 lbs. 5.4
NACG162ELHS192LR	NACG162ELHB192LR	6146	9	15	4	—	—	43 lbs. 5.4
NACG162ELHS192A	NACG162ELHB192A	9556	9	15	4	—	—	50 lbs. 6.7
NACG162ELHS192CE	NACG162ELHB192CE	6146	9	15	4	—	—	41 lbs. 5.4
NACG162ELHS216LR	NACG162ELHB216LR	6146	9	15	4	—	—	43 lbs. 5.4
NACG162ELHS216A	NACG162ELHB216A	9556	9	15	4	—	—	50 lbs. 6.7
NACG162ELHS216CE	NACG162ELHB216CE	6146	9	15	4	—	—	41 lbs. 5.4
NACG162ELHS240LR	NACG162ELHB240LR	6146	9	15	4	—	—	43 lbs. 5.4
NACG162ELHS240A	NACG162ELHB240A	9556	9	15	4	—	—	50 lbs. 6.7
NACG162ELHS240CE	NACG162ELHB240CE	6146	9	15	4	—	—	41 lbs. 5.4

- Example Model: NACG162ELHS**120LR** (**120** - designates size of table top; **LR** - designates grommet locations); see pages 28-29 for details
- G16 Grommet CUTOUPS must be specified in the conference top in which the Power/Data Oasis units will be installed
- Kits include jumper cables and hardwire starter cable required to daisy chain the Power/Data Oasis units
- "LR" models include 2 Oasis units, "A" models include 3 Oasis units and "CE" models include 2 Oasis units
- Units are powder coated

ACCESSORIES

TO ORDER, SPECIFY:

1. Model Number

SAMPLE MODEL NUMBER:

NACG17AELPGB

1 TOUCH PIVOTING POWER GROMMET (G17A)



MODEL NO./DESCRIPTION		LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
D	W	H	A	KW					
NACG17AELPGB	Black	\$ 345	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17AELPGS	Silver	345	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17AELPGW	White	345	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17AELPG1B	Braided Cord, Black	\$ 399	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17AELPG1S	Braided Cord, Silver	399	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17AELPG1W	Braided Cord, White	399	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17AELHCB	Hardwire, Black	\$ 364	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17AELHCS	Hardwire, Silver	364	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17AELHCW	Hardwire, White	364	4¼	5¼	2½	—	—	3 lbs.	0.15

- Includes 2 power outlets
- Units are powder coated
- See pages 540-542 for details


1 TOUCH PIVOTING POWER GROMMET (G17B)



NACG17BELPGB	Black	\$ 354	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17BELPGS	Silver	354	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17BELPGW	White	354	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17BELPG1B	Braided Cord, Black	\$ 408	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17BELPG1S	Braided Cord, Silver	408	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17BELPG1W	Braided Cord, White	408	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17BELHCB	Hardwire, Black	\$ 428	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17BELHCS	Hardwire, Silver	428	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17BELHCW	Hardwire, White	428	4¼	5¼	2½	—	—	3 lbs.	0.15

- Includes 1 power outlet and 1 dual USB-A + C combo
- Units are powder coated
- See pages 540-542 for details

1 TOUCH PIVOTING POWER GROMMET (G17C)



NACG17CELPGB	Black	\$ 340	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17CELPGS	Silver	340	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17CELPGW	White	340	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17CELPG1B	Braided Cord, Black	\$ 394	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17CELPG1S	Braided Cord, Silver	394	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17CELPG1W	Braided Cord, White	394	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17CELHCB	Hardwire, Black	\$ 359	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17CELHCS	Hardwire, Silver	359	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17CELHCW	Hardwire, White	359	4¼	5¼	2½	—	—	3 lbs.	0.15

- Includes 1 power outlet
- Units are powder coated
- See pages 540-542 for details


TO ORDER, SPECIFY:

1. Model Number


SAMPLE MODEL NUMBER:

NACG17AELPD2IQKB


INTERLINK IQ SYSTEM (G17A)




NACG17AELPD2IQKS




NACG17AELPD2IQB



NACEL2IQBB



NACEL2IQ60J



NACEL2IQ60TJ

MODEL NO./DESCRIPTION

FULL SET OF 8 UNITS

NACG17AELPD2IQKB	Set of 8, Black	\$ 2906
NACG17AELPD2IQKS	Set of 8, Silver	2906
NACG17AELPD2IQKW	Set of 8, White	2906

- Full sets include 8 grommets and smart box with starter plug

INTERLINK GROMMETS

NACG17AELPD2IQB	Interlink Grommet, Black	\$ 353
NACG17AELPD2IQS	Interlink Grommet, Silver	353
NACG17AELPD2IQW	Interlink Grommet, White	353

- Must order smart box with plug separately

INTERLINK IQ SMART BOX AND JUMPER

NACEL2IQBB	Interlink IQ smart box w/starter plug	\$ 536
NACEL2IQ60J	Interlink IQ Jumper-60"	119
NACEL2IQ60TJ	Transitional Jumper	125

- Must order smart box with plug separately
- UL Recognized
- Non-sequential "Daisy chain" solution
- Interlink IQ system must begin with a smart box with plug (or full set)
- Jumper used between the smart box with plug and grommets when the span between grommet locations are greater than 60"
- Transitional jumper (connections on both ends) used only when using an older IQ model and a new IQ model (as of November 2019)
- Jumpers count as one connection (maximum of 8)
- The Interlink IQ system is ONLY plugged. This system cannot be hardwired
- Units are powder coated
- Built-in status indicator: green means go, red light indicates too many units
- See charts on pages 558-559

LIST PRICE DIMENSIONS A KW CARTONED CUBIC WEIGHT FEET

D	W	H	A	KW	WEIGHT	FEET
4¼	5¼	2½	—	—	19 lbs.	1.55
4¼	5¼	2½	—	—	19 lbs.	1.55
4¼	5¼	2½	—	—	19 lbs.	1.55

4¼	5¼	2½	—	—	3 lbs.	0.15
4¼	5¼	2½	—	—	3 lbs.	0.15
4¼	5¼	2½	—	—	3 lbs.	0.15

—	120	—	—	—	3 lbs.	0.15
—	60	—	—	—	3 lbs.	0.15
—	60	—	—	—	3 lbs.	0.15






ACCESSORIES

TO ORDER, SPECIFY:

1. Model Number

SAMPLE MODEL NUMBER:

NACG17BELPD2IQKB

	MODEL NO./DESCRIPTION	PRICE	D	W	H	A	KW	WEIGHT	FEET	
	INTERLINK IQ SYSTEM (G17B)									
	FULL SET OF 8 UNITS									
	NACG17BELPD2IQKB	Set of 8, Black	\$ 3863	4¼	5¼	2½	—	—	19 lbs.	1.55
	NACG17BELPD2IQKS	Set of 8, Silver	3863	4¼	5¼	2½	—	—	19 lbs.	1.55
	NACG17BELPD2IQKW	Set of 8, White	3863	4¼	5¼	2½	—	—	19 lbs.	1.55
	• Full sets include 8 grommets and smart box with starter plug									
	INTERLINK GROMMETS									
	NACG17BELPD2IQB	Interlink Grommet, Black	\$ 493	4¼	5¼	2½	—	—	3 lbs.	0.15
	NACG17BELPD2IQS	Interlink Grommet, Silver	493	4¼	5¼	2½	—	—	3 lbs.	0.15
	NACG17BELPD2IQW	Interlink Grommet, White	493	4¼	5¼	2½	—	—	3 lbs.	0.15
	• Must order smart box with plug separately									
	INTERLINK IQ SMART BOX AND JUMPER									
	NACEL2IQBB	Interlink IQ smart box w/starter plug	\$ 536	—	120	—	—	—	3 lbs.	0.15
	NACEL2IQ60J	Interlink IQ Jumper-60"	119	—	60	—	—	—	3 lbs.	0.15
	NACEL2IQ60TJ	Transitional Jumper	125	—	60	—	—	—	3 lbs.	0.15
	• Must order smart box with plug separately • UL Recognized • Non-sequential "Daisy chain" solution • Interlink IQ system must begin with a smart box with plug (or full set) • Jumper used between the smart box with plug and grommets when the span between grommet locations are greater than 60" • Transitional jumper (connections on both ends) used only when using an older IQ model and a new IQ model (as of November 2019) • Jumpers count as one connection (maximum of 8) • The Interlink IQ system is ONLY plugged. This system cannot be hardwired • Units are powder coated • Built-in status indicator: green means go, red light indicates too many units • See charts on pages 558-559									
	INTERLINK IQ SMART BOX AND JUMPER									
	NACEL2IQBB	Interlink IQ smart box w/starter plug	\$ 536	—	120	—	—	—	3 lbs.	0.15
	NACEL2IQ60J	Interlink IQ Jumper-60"	119	—	60	—	—	—	3 lbs.	0.15
	NACEL2IQ60TJ	Transitional Jumper	125	—	60	—	—	—	3 lbs.	0.15
	• Must order smart box with plug separately • UL Recognized • Non-sequential "Daisy chain" solution • Interlink IQ system must begin with a smart box with plug (or full set) • Jumper used between the smart box with plug and grommets when the span between grommet locations are greater than 60" • Transitional jumper (connections on both ends) used only when using an older IQ model and a new IQ model (as of November 2019) • Jumpers count as one connection (maximum of 8) • The Interlink IQ system is ONLY plugged. This system cannot be hardwired • Units are powder coated • Built-in status indicator: green means go, red light indicates too many units • See charts on pages 558-559									
	INTERLINK IQ SMART BOX AND JUMPER									
	NACEL2IQBB	Interlink IQ smart box w/starter plug	\$ 536	—	120	—	—	—	3 lbs.	0.15
	NACEL2IQ60J	Interlink IQ Jumper-60"	119	—	60	—	—	—	3 lbs.	0.15
	NACEL2IQ60TJ	Transitional Jumper	125	—	60	—	—	—	3 lbs.	0.15
	• Must order smart box with plug separately • UL Recognized • Non-sequential "Daisy chain" solution • Interlink IQ system must begin with a smart box with plug (or full set) • Jumper used between the smart box with plug and grommets when the span between grommet locations are greater than 60" • Transitional jumper (connections on both ends) used only when using an older IQ model and a new IQ model (as of November 2019) • Jumpers count as one connection (maximum of 8) • The Interlink IQ system is ONLY plugged. This system cannot be hardwired • Units are powder coated • Built-in status indicator: green means go, red light indicates too many units • See charts on pages 558-559									


TO ORDER, SPECIFY:

1. Model Number


SAMPLE MODEL NUMBER:

NACG17CELPD2IQKB


INTERLINK IQ SYSTEM (G17C)




NACG17CELPD2IQKS




NACG17CELPD2IQB



NACEL2IQBB



NACEL2IQ60J



NACEL2IQ60TJ

MODEL NO./DESCRIPTION

FULL SET OF 8 UNITS

NACG17CELPD2IQKB	Set of 8, Black	\$ 2750
NACG17CELPD2IQKS	Set of 8, Silver	2750
NACG17CELPD2IQKW	Set of 8, White	2750

- Full sets include 8 grommets and smart box with starter plug

INTERLINK GROMMETS

NACG17CELPD2IQB	Interlink Grommet, Black	\$ 333
NACG17CELPD2IQS	Interlink Grommet, Silver	333
NACG17CELPD2IQW	Interlink Grommet, White	333

- Must order smart box with plug separately

INTERLINK IQ SMART BOX AND JUMPER

NACEL2IQBB	Interlink IQ smart box w/starter plug	\$ 536
NACEL2IQ60J	Interlink IQ Jumper-60"	119
NACEL2IQ60TJ	Transitional Jumper	125

- Must order smart box with plug separately
- UL Recognized
- Non-sequential "Daisy chain" solution
- Interlink IQ system must begin with a smart box with plug (or full set)
- Jumper used between the smart box with plug and grommets when the span between grommet locations are greater than 60"
- Transitional jumper (connections on both ends) used only when using an older IQ model and a new IQ model (as of November 2019)
- Jumpers count as one connection (maximum of 8)
- The Interlink IQ system is ONLY plugged. This system cannot be hardwired
- Units are powder coated
- Built-in status indicator: green means go, red light indicates too many units
- See charts on pages 558-559

LIST PRICE DIMENSIONS A KW CARTONED CUBIC WEIGHT FEET


D	W	H	A	KW	CARTONED WEIGHT	CUBIC FEET
4¼	5¼	2½	—	—	19 lbs.	1.55
4¼	5¼	2½	—	—	19 lbs.	1.55
4¼	5¼	2½	—	—	19 lbs.	1.55

4¼	5¼	2½	—	—	3 lbs.	0.15
4¼	5¼	2½	—	—	3 lbs.	0.15
4¼	5¼	2½	—	—	3 lbs.	0.15

—	120	—	—	—	3 lbs.	0.15
—	60	—	—	—	3 lbs.	0.15
—	60	—	—	—	3 lbs.	0.15

Configuration of IQ System for 72" WaveWorks Training Tables - Max of 6 IQ Units per run


6 Power Units



Jumper NACELIQJ

Item	Qty
Smart Box	1
Grommet	6
Jumper	2


5 Power Units



Jumper NACELIQJ

Item	Qty
Smart Box	1
Grommet	5
Jumper	2


4 Power Units



Jumper NACELIQJ

Item	Qty
Smart Box	1
Grommet	4
Jumper	1


3 Power Units



Jumper NACELIQJ

Item	Qty
Smart Box	1
Grommet	3
Jumper	1

2 Power Units




Jumper NACELIQJ

Item	Qty
Smart Box	1
Grommet	2

Configuration of IQ System for 66" WaveWorks Training Tables - Max of 6 IQ Units per run


6 Power Units



Jumper NACELIQJ

Item	Qty
Smart Box	1
Grommet	6
Jumper	1


5 Power Units



Jumper NACELIQJ

Item	Qty
Smart Box	1
Grommet	5
Jumper	1


4 Power Units



Jumper NACELIQJ

Item	Qty
Smart Box	1
Grommet	4
Jumper	1


3 Power Units



Jumper NACELIQJ

Item	Qty
Smart Box	1
Grommet	3

2 Power Units



Jumper NACELIQJ

Item	Qty
Smart Box	1
Grommet	2

Configuration of IQ System for 60" WaveWorks Training Tables - Max of 8 IQ Units per run

8 Power Units




Diagram showing a 60-inch WaveWorks Training Table with 8 power units installed. The units are spaced evenly along the length of the table, with a 60-inch segment between each unit. A power cord is shown connected to the first unit on the left.

Item	Qty
Smart Box	1
Grommet	8

7 Power Units




Diagram showing a 60-inch WaveWorks Training Table with 7 power units installed. The units are spaced evenly along the length of the table, with a 60-inch segment between each unit. A power cord is shown connected to the first unit on the left.

Item	Qty
Smart Box	1
Grommet	7

6 Power Units




Diagram showing a 60-inch WaveWorks Training Table with 6 power units installed. The units are spaced evenly along the length of the table, with a 60-inch segment between each unit. A power cord is shown connected to the first unit on the left.

Item	Qty
Smart Box	1
Grommet	6

5 Power Units




Diagram showing a 60-inch WaveWorks Training Table with 5 power units installed. The units are spaced evenly along the length of the table, with a 60-inch segment between each unit. A power cord is shown connected to the first unit on the left.

Item	Qty
Smart Box	1
Grommet	5

4 Power Units




Diagram showing a 60-inch WaveWorks Training Table with 4 power units installed. The units are spaced evenly along the length of the table, with a 60-inch segment between each unit. A power cord is shown connected to the first unit on the left.

Item	Qty
Smart Box	1
Grommet	4

3 Power Units




Diagram showing a 60-inch WaveWorks Training Table with 3 power units installed. The units are spaced evenly along the length of the table, with a 60-inch segment between each unit. A power cord is shown connected to the first unit on the left.

Item	Qty
Smart Box	1
Grommet	3

2 Power Units




Diagram showing a 60-inch WaveWorks Training Table with 2 power units installed. The units are spaced evenly along the length of the table, with a 60-inch segment between each unit. A power cord is shown connected to the first unit on the left.

Item	Qty
Smart Box	1
Grommet	2

ACCESSORIES

TO ORDER, SPECIFY:


1. Model Number

SAMPLE MODEL NUMBER:


NACG23ELB

	MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
			D	W	H	A	KW		
POWER GROMMET (G23)	NACG23ELB Black	\$ 499	2½	4½	3¼	—	—	2.3 lbs.	0.2
	NACG23ELS Silver	499	2½	4½	3¼	—	—	2.3 lbs.	0.2
	NACG23ELHCB Black/Hardwire	\$ 556	2½	4½	3¼	—	—	2.3 lbs.	0.2
	NACG23ELHCS Silver/Hardwire	556	2½	4½	3¼	—	—	2.3 lbs.	0.2


• Not intended for use on conference tables
 • Includes 2 power outlets and 2 power USB ports
 • Units are powder coated



DAISY LINK (G23)



Plugged Starter Unit



Hardwire Starter Unit

DAISY LINK STARTER UNITS

NACG23ELDLB1	Black - G23, Plugged	\$ 568	2½	4½	3¼	—	—	4.1 lbs.	0.4
NACG23ELDLS1	Silver - G23, Plugged	568	2½	4½	3¼	—	—	4.1 lbs.	0.4
NACG23ELDLHB1	Black - G23, Hardwire/Modular Connect	\$ 568	2½	4½	3¼	—	—	3.7 lbs.	0.4
NACG23ELDLHS1	Silver - G23, Hardwire/Modular Connect	568	2½	4½	3¼	—	—	3.7 lbs.	0.4

• Modular connect does not meet city code

DAISY LINK ADD-ON UNITS/JUMPER KIT

NACG23ELDLB2	Black - G23	\$ 596	2½	4½	3¼	—	—	2.3 lbs.	0.4
NACG23ELDLS2	Silver - G23	596	2½	4½	3¼	—	—	2.3 lbs.	0.4


• 60" jumper included with each daisy link add-on unit
 • Units are powder coated

DAISY LINK JUMPER (80", 180", AND 240")

NAC80ELDLJ	80" Daisy Chain Jumper	\$ 208	¾	80	2	—	—	2.4 lbs.	0.4
NAC180ELDLJ	180" Daisy Chain Jumper	315				—	—	lbs.	
NAC240ELDLJ	240" Daisy Chain Jumper	371				—	—	lbs.	

• 80" jumper is needed when connecting power between tables
 • Units are powder coated

NODE POWER GROMMET (G33)



NACG33ELB	Black	\$ 318	4	4	3½	—	—	1 lbs.	0.2
NACG33ELS	Silver	318	4	4	3½	—	—	1 lbs.	0.2
NACG33ELW	White	318	4	4	3½	—	—	1 lbs.	0.2

• For use with Maneuver gear, shield, and 120° tables when CUT-G33 option is specified

TO ORDER, SPECIFY:


1. Model Number

SAMPLE MODEL NUMBER:

NAC08ELPG3AXAB

	MODEL NO./DESCRIPTION		LIST PRICE	DIMENSIONS			A	KW	CARTONED WEIGHT	CUBIC FEET
				D	W	H				

AXIL M BLUE TOOTH SPEAKER



NAC08ELPG3AXAB	Black	\$ 787					—	—	4.7 lbs.	0.31
NAC08ELPG3AXAS	Silver	787					—	—	4.7 lbs.	0.31
NAC08ELPG3AXAW	White	787					—	—	4.7 lbs.	0.31

- Freestanding unit
- 1 power outlet, 1 bluetooth speaker with push button pairing button, built in microphone, and 1 2.0 amp charging USB-A port, with stainless steel grille
- Black, 6 ft, 15 amp plugged power cord
- UL Listed


VESTA SET-ON FLOOR, BATTERY-POWERED



NAC29ELPG4VEAB	Black/Dark Grey	\$ 2109					—	—	13.9 lbs.	3.14
NAC29ELPG4VEAW	White/Light Grey	2109					—	—	13.9 lbs.	3.14

- Freestanding unit
- 3 single USB-A 2.0 amp, 1 USB-C 18 watts, 1 LED battery indicator light
- Black, 6 ft, 15 amp plugged power cord for recharging
- UL Listed
- 40 amp hours, 40 watts
- Vesta models have a Lithium battery and MUST ship separately via Fed Ex Ground


BURELÉ, POWER, CLAMP MOUNT



NAC07ELPG4BUAB	Black	\$ 332					—	—	1.25 lbs.	0.24
NAC07ELPG4BUAW	White	332					—	—	1.25 lbs.	0.24
NAC07ELPG4BUAG	Light Grey	332					—	—	1.25 lbs.	0.24

- Clamp mount unit
- 4 power outlets
- Black, 6 ft, 15 amp plugged cord with built in circuit breaker
- UL Listed

BURELÉ, POWER/USB, CLAMP MOUNT



NAC07ELPG4BUBB	Black	\$ 557					—	—	1.25 lbs.	0.24
NAC07ELPG4BUBW	White	557					—	—	1.25 lbs.	0.24
NAC07ELPG4BUBG	Light Grey	557					—	—	1.25 lbs.	0.24

- Clamp mount unit
- 2 power, 1 dual USB-A, 2.0 amp, 1 single USB-C -18 Watt
- Black, 6 ft 15 amp plugged power cord
- UL Listed


ACCESSORIES


TO ORDER, SPECIFY:


1. Model Number


SAMPLE MODEL NUMBER:


NAC04ELPG2DEAB


	MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS			A	KW	CARTONED WEIGHT	CUBIC FEET
			D	W	H				
DEAN, 2 PORT, POWER, CLAMP MOUNT 	NAC04ELPG2DEAB Black	\$ 298				—	—	1.95 lbs.	0.24
	NAC04ELPG2DEAW White	298				—	—	1.95 lbs.	0.24
	NAC04ELPG2DEAG Light Grey	298				—	—	1.95 lbs.	0.24
	<ul style="list-style-type: none"> • Plastic face plate and end caps, clear anodized housing, and universal clamp mount • 2 power • Black, 6 ft, 15 amp plugged power cord • UL Listed 								

DEAN, 2 PORT, POWER/USB, CLAMP MOUNT 	NAC04ELPG2DEBB Black	\$ 309				—	—	1.95 lbs.	0.24
	NAC04ELPG2DEBW White	309				—	—	1.95 lbs.	0.24
	NAC04ELPG2DEBG Light Grey	309				—	—	1.95 lbs.	0.24
	<ul style="list-style-type: none"> • Plastic face plate and end caps, clear anodized housing, and universal clamp mount • 1 power, 1 dual USB-A 2.0 amp • Black, 6 ft, 15 amp plugged power cord • UL Listed 								

DEAN, 3 PORT, POWER, CLAMP MOUNT 	NAC06ELPG3DEAB Black	\$ 304				—	—	1.95 lbs.	0.24
	NAC06ELPG3DEAW White	304				—	—	1.95 lbs.	0.24
	NAC06ELPG3DEAG Light Grey	304				—	—	1.95 lbs.	0.24
	<ul style="list-style-type: none"> • Plastic face plate and end caps, clear anodized housing, and universal clamp mount • 3 power • Black, 6 ft, 15 amp plugged power cord • UL Listed 								

DEAN, 3 PORT, POWER/USB, CLAMP MOUNT 	NAC06ELPG3DEBB Black	\$ 405				—	—	1.95 lbs.	0.24
	NAC06ELPG3DEBW White	405				—	—	1.95 lbs.	0.24
	NAC06ELPG3DEBG Light Grey	405				—	—	1.95 lbs.	0.24
	<ul style="list-style-type: none"> • Plastic face plate and end caps, clear anodized housing, and universal clamp mount • 2 power, 1 USB-A + C combo 18 watt, 2.0 amp; end receptacle rotated 90° • Black, 6 ft, 15 amp plugged power cord • UL Listed 								

HITCH, BATTERY-POWERED 	NAC04ELPG4HTAB Black	\$ 535				—	—	1.7 lbs.	0.24
	NAC04ELPG4HTAW White	535				—	—	1.7 lbs.	0.24
	NAC04ELPG4HTAG Light Grey	535				—	—	1.7 lbs.	0.24
	<ul style="list-style-type: none"> • Freestanding and portable • 3 single USB-A, 2.0 amps, 1 LED battery indicator light • Black, 6 ft, 15 amp plugged power cord assembly for recharging. 5v, 4 amps • The unit is not UL Listed • The power pack is UL Listed • 11.6 amp hours, 20 watt power supply • Hitch models have a Lithium battery and MUST ship separately via Fed Ex Ground 								

UNDERSURFACE POWER/DATA 	NAC03ELUPDC	\$ 287	3	3	1½	—	—	2 lbs.	0.3
	<ul style="list-style-type: none"> • Can be mounted to the underside of any surface • Contains 1 electrical outlet and 2 USB ports • Mounts under surface • 72" power cord included 								


TO ORDER, SPECIFY:

1. Model Number

SAMPLE MODEL NUMBER:


NAC03ELPG2GAAW

GARCIA



MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
		D	W	H	A	KW		
NAC03ELPG2GAAW White	\$ 239	4	2¾	1½	—	—	1.27 lbs.	0.9
NAC03ELPG2GAAB Black	239	4	2¾	1½	—	—	1.27 lbs.	0.9
NAC03ELPG2GAAG Fog	239	4	2¾	1½	—	—	1.27 lbs.	0.9
<ul style="list-style-type: none"> • 72" cord • Includes 2 USB-A 								
NAC03ELPG2GABW White	\$ 317	4	2¾	1½	—	—	1.27 lbs.	0.9
NAC03ELPG2GABB Black	317	4	2¾	1½	—	—	1.27 lbs.	0.9
NAC03ELPG2GABG Fog	317	4	2¾	1½	—	—	1.27 lbs.	0.9
<ul style="list-style-type: none"> • 72" cord • Includes 2 USB-A+C 								

TULLY




NAC06ELPG3TUAW White	\$ 466	2¼	5%	12¾	—	—	3.05 lbs.	0.40
NAC06ELPG3TUAB Black	466	2¼	5%	12¾	—	—	3.05 lbs.	0.40
NAC06ELPG3TUAG Fog	466	2¼	5%	12¾	—	—	3.05 lbs.	0.40
<ul style="list-style-type: none"> • 120" braided cord • Includes 2 USB-A, 1 USB-C and Power 								

WILLOW




NAC04ELPG2WLAW Walnut with black braided cord	\$ 331	4	3¾	2¼	—	—	2.18 lbs.	0.17
NAC04ELPG2WLAB Black with black braided cord	331	4	3¾	2¼	—	—	2.18 lbs.	0.17
NAC04ELPG2WLAE Beech with Teal braided cord	331	4	3¾	2¼	—	—	2.18 lbs.	0.17
<ul style="list-style-type: none"> • 108" cord • Includes 2 Power • Tamper resistant 								

TRIPPEL



NAC08ELPG3TRAW White	\$ 328	3¾	7%	3¾	—	—	2 lbs.	0.13
NAC08ELPG3TRAB Black	328	3¾	7%	3¾	—	—	2 lbs.	0.13
NAC08ELPG3TRAG Fog	328	3¾	7%	3¾	—	—	2 lbs.	0.13
<ul style="list-style-type: none"> • Set on surface unit • Included 2 USB-A and 2 power • Tamper resistant • Features Qi wireless charging 								

POWER STRIP



NAC0902EL6PS Black	\$ 78	1%	9½	1%	—	—	lbs.	
<ul style="list-style-type: none"> • 120" Cord • Includes 6 power 								





ACCESSORIES

TO ORDER, SPECIFY:

1. Model Number


SAMPLE MODEL NUMBER:

NAC05ELPG2HRAC

	MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
			D	W	H	A	KW		
HEARTH 	NAC05ELPG2HRAC	\$ 494	5 $\frac{3}{8}$	3 $\frac{1}{4}$	5 $\frac{3}{8}$	—	—	3 lbs.	0.31
	<ul style="list-style-type: none"> Includes 1 power, 1 Dual USB-A 108" power cord Handmolded concrete body with a wood base detail Features a solid brass braided cord UL Listed 								
SIDEKICK 	NAC29ELPG2SKAG Heather Gray Felt	\$ 387	2 $\frac{3}{8}$	15	29 $\frac{1}{2}$	—	—	2 lbs.	0.59
	NAC29ELPG2SKAC Camel Felt	387	2 $\frac{3}{8}$	15	29 $\frac{1}{2}$	—	—	2 lbs.	0.59
	<ul style="list-style-type: none"> Felt sofa arm overlay Includes 1 power, 1 Dual USB-A, and felt pocket Heather Gray unit features power and a braided cord in Poppy. Camel unit features a power and braided cord in Dusk 108" power cord UL Listed 								
APPARATUS 	NAC05ELPG2APAB Black	\$ 292	3 $\frac{3}{8}$	4 $\frac{13}{16}$	2	—	—	lbs.	
	NAC05ELPG2APAW White	292	3 $\frac{3}{8}$	4 $\frac{13}{16}$	2	—	—	lbs.	
	<ul style="list-style-type: none"> Includes 1 power, 1 Dual USB-A 108" power cord Black unit features a black braided cord and silver hardware. White unit features a white braided cord and silver hardware ETL and UL Listed 								
ASHLEY DUO 	NAC06ELPG3ADAB Black	\$ 343	3 $\frac{3}{8}$	5 $\frac{1}{2}$	1 $\frac{13}{16}$	—	—	lbs.	
	NAC06ELPG3ADAW White	343	3 $\frac{3}{8}$	5 $\frac{1}{2}$	1 $\frac{13}{16}$	—	—	lbs.	
	<ul style="list-style-type: none"> Includes 2 power, 2 USB 72" power cord Must have at least 5$\frac{1}{2}$" of clearance under surface at point of application to be able to mount Clamp mount; Unit will fit on worksurface thicknesses $\frac{1}{2}$"-2$\frac{13}{16}$" UL Listed 								

TO ORDER, SPECIFY:
1. Model Number

SAMPLE MODEL NUMBER:
NAC120ELE4P

	MODEL NO./DESCRIPTION	LIST PRICE
4- TRAC POWER ENTRY 	NAC120ELE4P Plugged	\$ 298
	NAC120ELE4H Hardwire	200
	NAC72ELE4NH NYC Hardwire	366



4- TRAC KIT	NACEL4KTC1	48"-60" Tables	\$ 202
	NACEL4KTC2	72"-84" Tables	219
	NACEL4KTC3	96"-108" Tables	298
	NACEL4KTC4	120" Tables	366
	NACEL4KTC5	144" Tables	467
	NACEL4KTC6	168" Tables	478
	NACEL4KTC7	192" Tables	501
	NACEL4KTC8	216" Tables	523
	NACEL4KTC9	240" Tables	636

• See page 566 for details



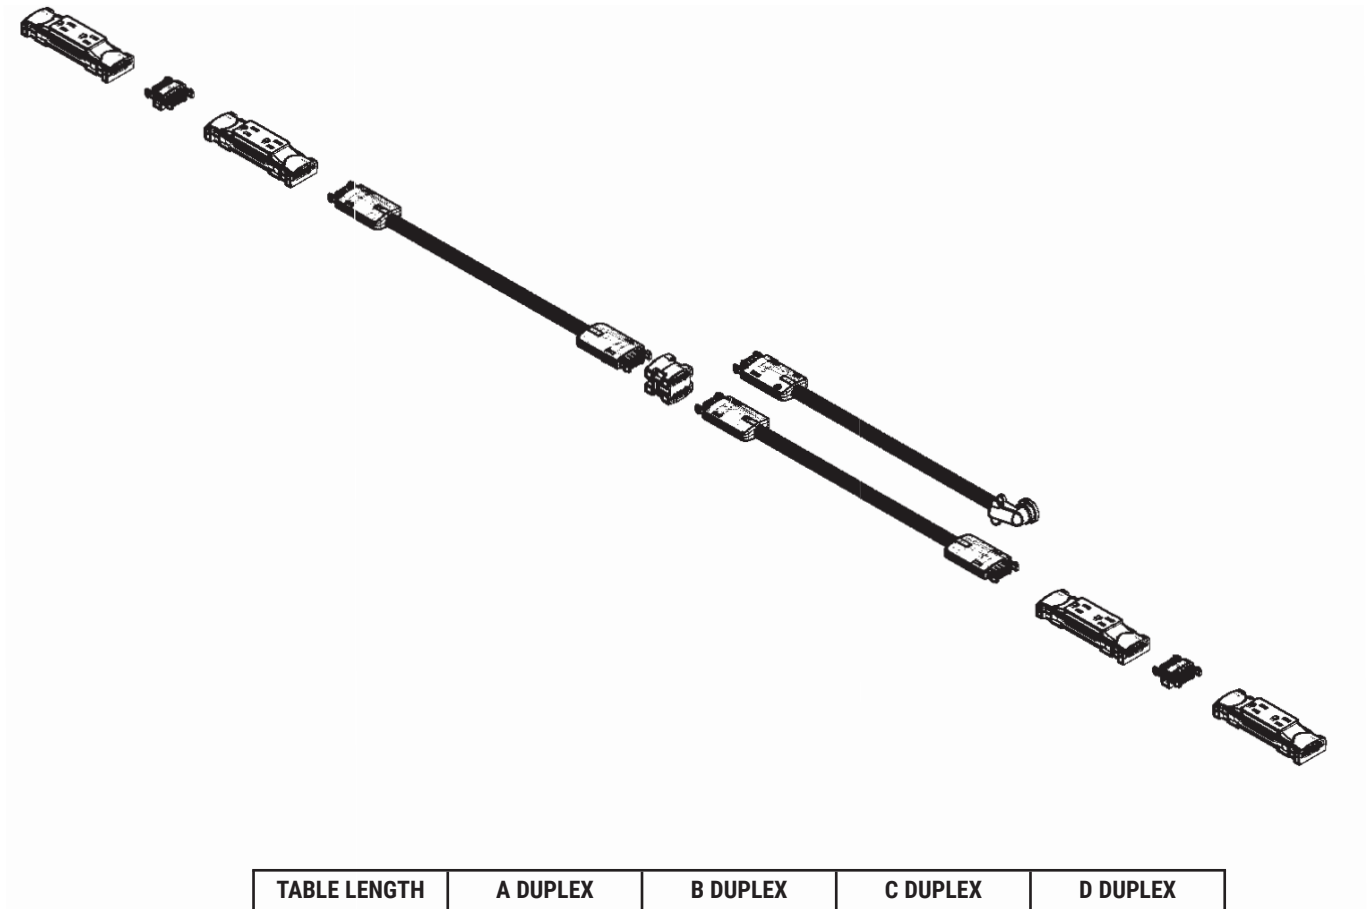


TABLE LENGTH	A DUPLEX	B DUPLEX	C DUPLEX	D DUPLEX
48"	n/a	16 ³ / ₁₆	31 ¹³ / ₁₆	n/a
60"	n/a	22 ³ / ₁₆	37 ¹³ / ₁₆	n/a
72"	n/a	24 ³ / ₁₆	47 ¹³ / ₁₆	n/a
84"	n/a	30 ³ / ₈	53 ¹³ / ₁₆	n/a
96"	30 ³ / ₁₆	36 ³ / ₈	59 ³ / ₄	n/a
108"	36 ³ / ₁₆	42 ³ / ₈	65 ³ / ₄	n/a
120"	38 ³ / ₁₆	44 ³ / ₈	75 ⁷ / ₁₆	n/a
144"	38 ³ / ₁₆	44 ³ / ₈	99 ⁷ / ₁₆	105 ¹ / ₂
168"	44 ³ / ₄	50 ³ / ₁₆	117 ³ / ₈	123 ³ / ₁₆
192"	50 ³ / ₄	56 ³ / ₁₆	135 ³ / ₈	141 ³ / ₁₆
216"	50 ³ / ₁₆	56 ³ / ₄	159 ³ / ₁₆	165 ³ / ₈
240"	14 ⁵ / ₈	68 ³ / ₄	171 ³ / ₁₆	224 ¹³ / ₁₆








*Dimensions are in inches
See page 565 for pricing

TO ORDER, SPECIFY:

1. Model Number

SAMPLE MODEL NUMBER:

NACG26ELB

	MODEL NO./DESCRIPTION		LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
				D	W	H	A	KW		
MARINA™ HDMI COLLABORATIVE MEETING TECHNOLOGY SOLUTION 	NACG26ELB	Black	\$ 8353	8	14	7 $\frac{1}{16}$	—	—	20 lbs.	2.4
	NACG26ELS	Silver	8353	8	14	7 $\frac{1}{16}$	—	—	20 lbs.	2.4
	• See pages 540-542 for detailed specifications									
UNDERSURFACE WIRE MANAGER 	NAC0403WM	Set of 2	\$ 47	4	2 $\frac{5}{8}$	1 $\frac{3}{4}$	—	—	1 lbs.	0.1
	• Specify model number only									
	• Black									
VERTICAL WIRE MANAGER 	NAC0318WMV	Cinder	\$ 204	—	3	18	—	—	2 lbs.	0.1
	NAC0318WMVS	Platinum Metallic	204	—	3	18	—	—	2 lbs.	0.1
	NAC0318WMVN	Satin Nickel Metallic	204	—	3	18	—	—	2 lbs.	0.1
MESH WIRE MANAGER 	• Applicable to all 2 $\frac{1}{2}$ " diameter C, T and X bases									
	• Clamps to leg; no hardware required									
VERTICAL WIRE MANAGER 	NAC0318WMM	Black	\$ 100	—	3	17 $\frac{1}{2}$	—	—	2 lbs.	0.1
	• Applicable to all 2 $\frac{1}{2}$ " diameter C, T and X bases									
	• Wraps around leg and is secured with Velcro®									
VERTICAL WIRE MANAGER 	NAC30WMV		\$ 228	1 $\frac{1}{2}$	3 $\frac{3}{4}$	31	—	—	2 lbs.	0.2
	• Graphite color									
	• Attaches to underside of worksurface; flexible; used to conceal power in-feed and data cables									
HORIZONTAL WIRE MANAGER 	NAC17WMH	Black Plastic	\$ 55	2 $\frac{1}{2}$	17	4 $\frac{1}{4}$	—	—	3 lbs.	0.5
	NAC24WMH	Black Plastic	64	2 $\frac{1}{2}$	24	4 $\frac{1}{4}$	—	—	3 lbs.	0.5
	• Attaches below worksurface; can be installed horizontally or vertically									
	• Used to conceal power in-feed and data cables									


TO ORDER, SPECIFY:

1. Model Number
2. Resin Grade/Color
3. Metal Color (holder)


SAMPLE MODEL NUMBER:

NAC7232PVMCP 1 1677 462

- See page 434 for fabrics

	MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS				A	KW	CARTONED WEIGHT	CUBIC FEET
			D	W	H					
<div>EDGE MOUNTED PRIVACY/MODESTY SCREEN RECTANGULAR, RESIN</div> 		GRADE 1								
	NAC7232PVMCP	\$ 878	3/16	72	32	—	—	46 lbs.	6.0	
	NAC6632PVMCP	875	3/16	66	32	—	—	34 lbs.	5.5	
	NAC6032PVMCP	598	3/16	60	32	—	—	32 lbs.	5.1	
	NAC5432PVMCP	594	3/16	54	32	—	—	30 lbs.	4.6	
	NAC4832PVMCP	572	3/16	48	32	—	—	28 lbs.	4.1	
	NAC4232PVMCP	522	3/16	42	32	—	—	26 lbs.	3.7	
	NAC3632PVMCP	499	3/16	36	32	—	—	24 lbs.	3.2	
	NAC3032PVMCP	378	3/16	30	32	—	—	22 lbs.	2.8	
	NAC2732PVMCP	366	3/16	27	32	—	—	22 lbs.	2.5	
	NAC2432PVMCP	340	3/16	24	32	—	—	20 lbs.	2.3	
	NAC2132PVMCP	330	3/16	21	32	—	—	18 lbs.	2.1	

- Specify resin grade and color: Grade 1 Frosted (1677)
- Specify metal color for holders: Concrete (423), Cinder (462), Iron (463), Platinum Metallic (501), or Satin Nickel Metallic (503)
- Privacy screens are $\frac{3}{16}$ " thick dual sided resin; the overall assembly thickness, including the holders, is $1\frac{1}{2}$ "
- Privacy screen holders are made of 12-gauge steel
- Privacy screens are not intended to be stand alone units
- For use on $1\frac{3}{16}$ " and $1\frac{1}{16}$ " surfaces with a softened or profiled rim. Not to be used with knife edge rims
- Screen extends 18" above the surface and 12" below the surface



ACCESSORIES

SAMPLE MODEL NUMBER:


- NAC7232PVMC2PFA A 8600 423

**EDGE MOUNTED
PRIVACY/MODESTY SCREEN
RECTANGULAR, FABRIC**



- Privacy screens are 1½" thick dual sided fabric; the overall assembly thickness
- Privacy screen holders are made of 12-gauge steel
- Privacy screens are not intended to be stand alone units
- Specify tack fabric grade and color
- Specify metal color for holders: Concrete (423), Cinder (462), Iron (463), Platinum Metallic (501), or Satin Nickel Metallic (503)
- For use on 1½" and 1¾" surfaces with a softened or profiled rim. Not to be used with knife edge rims
- Fabric will be railroaded
- Screen extends 18" above the surface and 12" below the surface

**EDGE MOUNTED
PRIVACY SCREEN
RECTANGULAR, RESIN**



- Specify resin grade and color: Grade 1 Frosted (1677)
- Specify metal color for holders: Concrete (423), Cinder (462), Iron (463), Platinum Metallic (501), or Satin Nickel Metallic (503)
- Privacy screens are ⅝" thick dual sided resin; the overall assembly thickness, including the holders, is 1⅝"
- Privacy screen holders are made of 12-gauge steel
- Privacy screens are not intended to be stand alone units
- For use on 1⅝" and 1⅞" surfaces with a softened or profiled rim. Not to be used with knife edge rims
- Screen extends 18" above the surface and 4" below the surface


TO ORDER, SPECIFY:

1. Model Number
2. Resin Grade/Color
3. Metal Color (holder)


SAMPLE MODEL NUMBERS:

NAC7224PVCTP 1 1677 462
 NAC7224PVC2PFA A 8600 423

- See page 434 for fabrics

MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS			A	KW	CARTONED WEIGHT	CUBIC FEET	
		D	W	H					
<div>EDGE MOUNTED PRIVACY SCREEN TAPERED, RESIN</div> 	GRADE 1								
	NAC7224PVCTP	\$ 867	3/16	71 13/16	24	—	—	24 lbs.	4.7
	NAC6624PVCTP	826	3/16	65 13/16	24	—	—	22 lbs.	4.3
	NAC6024PVCTP	783	3/16	59 13/16	24	—	—	19 lbs.	4.0
	NAC5424PVCTP	740	3/16	53 13/16	24	—	—	17 lbs.	3.6
	NAC4824PVCTP	700	3/16	47 7/8	24	—	—	16 lbs.	3.3
	NAC4224PVCTP	656	3/16	41 7/8	24	—	—	14 lbs.	2.9
	NAC3624PVCTP	612	3/16	35 7/8	24	—	—	12 lbs.	2.5
	NAC3024PVCTP	568	3/16	29 13/16	24	—	—	10 lbs.	2.2
	NAC2724PVCTP	547	3/16	27	24	—	—	9 lbs.	2.0
	NAC2424PVCTP	524	3/16	23 13/16	24	—	—	8 lbs.	1.8
	NAC2124PVCTP	504	3/16	21	24	—	—	7 lbs.	1.6

- Specify resin grade and color: Grade 1 Frosted (1677)
- Specify metal color for holders: Concrete (423), Cinder (462), Iron (463), Platinum Metallic (501), or Satin Nickel Metallic (503)
- Privacy screens are 3/16" thick dual sided resin; the overall assembly thickness, including the holders, is 1 3/8"
- Privacy screen holders are made of 12-gauge steel
- Privacy screens are not intended to be stand alone units
- For use on 1 3/8" and 1 1/2" surfaces with a softened or profiled rim. Not to be used with knife edge rims
- Screen extends 18" above the surface and 4" below the surface

**EDGE MOUNTED
 PRIVACY SCREEN
 RECTANGULAR, FABRIC**


	GRADE A	GRADE B/ COM						
NAC7224PVC2PFA	\$ 865	\$ 939	1 1/8	71 13/16	24	—	—	24 lbs. 4.7
NAC6624PVC2PFA	820	886	1 1/8	65 13/16	24	—	—	22 lbs. 4.3
NAC6024PVC2PFA	775	841	1 1/8	59 13/16	24	—	—	19 lbs. 4.0
NAC5424PVC2PFA	725	783	1 1/8	53 13/16	24	—	—	17 lbs. 3.6
NAC4824PVC2PFA	677	727	1 1/8	47 7/8	24	—	—	16 lbs. 3.3
NAC4224PVC2PFA	634	684	1 1/8	41 7/8	24	—	—	14 lbs. 2.9
NAC3624PVC2PFA	569	610	1 1/8	35 7/8	24	—	—	12 lbs. 2.5
NAC3024PVC2PFA	525	558	1 1/8	29 13/16	24	—	—	10 lbs. 2.2
NAC2724PVC2PFA	499	532	1 1/8	27	24	—	—	9 lbs. 2.0
NAC2424PVC2PFA	471	504	1 1/8	23 13/16	24	—	—	8 lbs. 1.8
NAC2124PVC2PFA	444	469	1 1/8	21	24	—	—	7 lbs. 1.6

• Privacy screens are 1 1/8" thick dual sided fabric
 • Privacy screen holders are made of 12-gauge steel
 • Privacy screens are not intended to be stand alone units
 • Specify tack fabric grade and color
 • Specify metal color for holders: Concrete (423), Cinder (462), Iron (463), Platinum Metallic (501), or Satin Nickel Metallic (503)
 • For use on 1 3/8" and 1 1/2" surfaces with a softened or profiled rim. Not to be used with knife edge rims
 • Fabric will be railroaded
 • Screen extends 18" above the surface and 4" below the surface






ACCESSORIES

TO ORDER, SPECIFY:

1. Model Number
2. Shelf Color
3. Laminate Color

SAMPLE MODEL NUMBER:

10N1867FDSHL PB PB
NAC1205WGV1

	MODEL NO./DESCRIPTION		LIST PRICE		DIMENSIONS			A	KW	CARTONED WEIGHT	CUBIC FEET
	D	W	H								
FREESTANDING KIOSK 	10N1867FDSHL	Laminate	\$ 1040		13 ¹ / ₁₆	17 ¹ / ₁₆	66 ³ / ₁₆	—	—	73 lbs.	19.7
	• Can be used to hang additional PPE equipment (ie. Glove holders and sanitizer dispensers) Limit of 10 lbs hung on the back										
SINGLE WIRE GLOVE BOX 	NAC1205WGV1	Steel	\$ 88		3 ¹ / ₁₆	11 ¹ / ₁₆	4 ³ / ₁₆	—	—	1 lbs.	1.38
	<ul style="list-style-type: none"> • Steel wire Glove box is Chrome in color • Includes pre-drilled mounting holes and hardware • Holds 1 std size box of gloves 										
DOUBLE WIRE GLOVE BOX 	NAC1210WGV2	Steel	\$ 120		3 ¹ / ₁₆	11 ¹ / ₁₆	9 ¹ / ₂	—	—	1 lbs.	2.7
	<ul style="list-style-type: none"> • Steel wire Glove box is Chrome in color • Includes pre-drilled mounting holes and hardware • Holds 2 std size boxes of gloves 										
QUAD WIRE GLOVE BOX 	NAC1219WGV4	Steel	\$ 172		3 ¹ / ₁₆	11 ¹ / ₁₆	19	—	—	1 lbs.	5.2
	<ul style="list-style-type: none"> • Steel wire Glove box is Chrome in color • Includes pre-drilled mounting holes and hardware • Holds 4 std size boxes of gloves 										
AUTOMATIC HAND SANITIZER DISPENSER 	NAC0407USD1		\$ 598		4 ¹ / ₁₆	6	11	—	—	2.2 lbs.	8.1
	<ul style="list-style-type: none"> • Dispenser accepts most bulk liquid soaps and sanitizers up to 12mL capacity, inside a solid case of durable ABS plastic • 4 C Batteries sold separately. External On-Off switch • Tamper resistant lock system with key for convenient access for assigned personnel • Motion Dispenser: Dispenses within a sense detection of 3"-5" • 2.2 lbs Empty (without fluid) 										



Shaded model numbers are available on our "To You in 10 Days or Less" Quick Delivery program and will be delivered in 10 days or less.

TO ORDER, SPECIFY:

1. Model Number
2. Resin Grade/Color
3. Paint Color

SAMPLE MODEL NUMBERS:

NAC6012MPA 1 1677 462
NACGBT2

- See page 434 for fabrics


MODEL NO./DESCRIPTION	LIST PRICE			DIMENSIONS			A	KW	CARTONED WEIGHT	CUBIC FEET
	GRADE 1	GRADE 2	GRADE 3	D	W	H				
RECTANGULAR MODESTY PANEL ⅓ HEIGHT RESIN										
NAC6012MPA	\$ 679	\$ 1003	\$ 1122	⅜	59⅞	12⅝	—	—	5 lbs.	3.9
NAC5412MPA	610	904	1012	⅜	53⅞	12⅝	—	—	5 lbs.	3.8
NAC4812MPA	542	800	895	⅜	47⅞	12⅝	—	—	4 lbs.	3.7
NAC4212MPA	475	703	787	⅜	41¾	12⅝	—	—	4 lbs.	3.7
NAC3612MPA	407	605	678	⅜	35¾	12⅝	—	—	4 lbs.	3.7
NAC3012MPA	340	502	561	⅜	29¾	12⅝	—	—	3 lbs.	3.6
NAC2412MPA	271	403	451	⅜	23⅞	12⅝	—	—	3 lbs.	3.6

- Specify resin grade and color: Grade 1 Frosted (1677), Grade 2 Ting Ting (2877) or Scribble Cloud (2977) or Grade 3 Wisp Silver (3377)
- Resin modesty can be used with Epic and WaveWorks worksurfaces and flip/nest tables
- Double sided ⅜" resin
- Modesty has stiffener rail which comes with brackets that attach to the underside of the worksurface
- 72" flip/nest training table requires 60" modesty, 60" table requires 48" modesty, and 48" table requires 36" modesty

TAPERED MODESTY PANEL
⅓ HEIGHT
RESIN


	GRADE 1	GRADE 2	GRADE 3							
NAC6012MPTA	\$ 679	\$ 1003	\$ 1122	⅜	59⅞	12⅝	—	—	5 lbs.	3.9
NAC5412MPTA	610	904	1012	⅜	53⅞	12⅝	—	—	5 lbs.	3.8
NAC4812MPTA	542	800	895	⅜	47⅞	12⅝	—	—	4 lbs.	3.7
NAC4212MPTA	475	703	787	⅜	41¾	12⅝	—	—	4 lbs.	3.7
NAC3612MPTA	407	605	678	⅜	35¾	12⅝	—	—	4 lbs.	3.7
NAC3012MPTA	340	502	561	⅜	29¾	12⅝	—	—	3 lbs.	3.6
NAC2412MPTA	271	403	451	⅜	23⅞	12⅝	—	—	3 lbs.	3.6

- Specify resin grade and color: Grade 1 Frosted (1677), Grade 2 Ting Ting (2877) or Scribble Cloud (2977) or Grade 3 Wisp Silver (3377)
- Resin modesty can be used with Epic and WaveWorks worksurfaces and flip/nest tables
- Double sided ⅜" resin
- Modesty has stiffener rail which comes with brackets that attach to the underside of the worksurface
- 72" flip/nest training table requires 60" modesty, 60" table requires 48" modesty, and 48" table requires 36" modesty

RECTANGULAR MODESTY PANEL
⅓ HEIGHT
METAL


NAC6012MP2M	\$ 679	⅜	59⅞	12⅝	—	—	10 lbs.	3.9
NAC5412MP2M	610	⅜	53⅞	12⅝	—	—	10 lbs.	3.8
NAC4812MP2M	542	⅜	47⅞	12⅝	—	—	8 lbs.	3.7
NAC4212MP2M	475	⅜	41¾	12⅝	—	—	8 lbs.	3.7
NAC3612MP2M	407	⅜	35¾	12⅝	—	—	8 lbs.	3.7
NAC3012MP2M	340	⅜	29¾	12⅝	—	—	6 lbs.	3.6
NAC2412MP2M	271	⅜	23⅞	12⅝	—	—	6 lbs.	3.6

- Specify Style E for embossed design
- Specify metal color: 423 Concrete, 462 Cinder, 463 Iron, 501 Platinum Metallic, 503 Satin Nickel Metallic and 405 Designer White
- Metal modesty can be used with Epic and WaveWorks worksurfaces and flip/nest tables
- Modesty comes with brackets that attach to the underside of the worksurface
- Metal modesty has raised square embossed design (the raised design appears on the approach side of the modesty)
- Metal modesty is 16-gauge steel
- 72" flip/nest training table requires 60" modesty, 60" table requires 48" modesty, and 48" table requires 36" modesty

GANGING BRACKET



NACGBT2	Table Ganging Bracket Kit	\$ 88	—	—	—	—	—	1 lbs.	0.1
---------	---------------------------	-------	---	---	---	---	---	--------	-----

- Quantity of 6 (set of 3 pairs) hook and loop "dog bone" shaped brackets
- All hardware included
- Available in black only
- Specify model number only

