



GATEWAY SOFA

Sofa Screen Installation

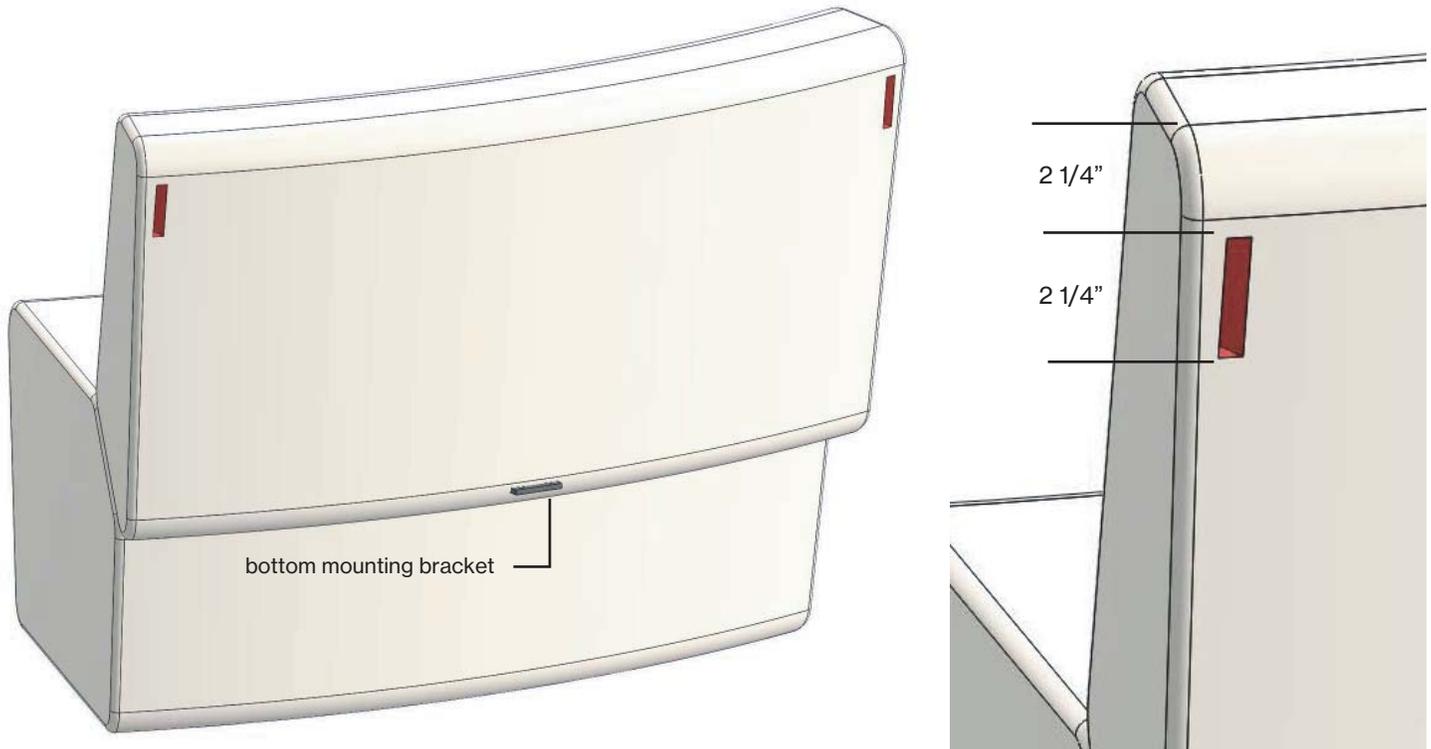


Locate slots in the back of the seat (marked in the drawing in red.)

If slot is not cut in the fabric, it will need to be done on site. To do this, press your finger to feel the void in the frame behind the fabric. Make a 2 1/4" long slit in the fabric with a utility knife.

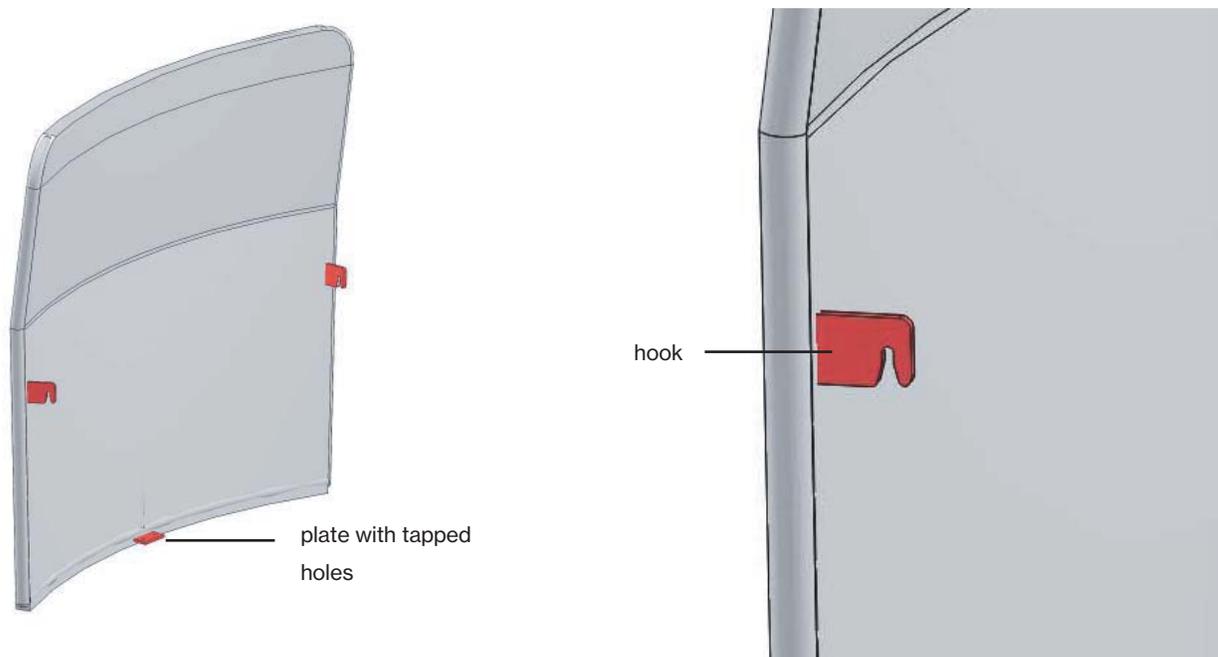


The screen has 3 mounting locations (shown in red). The two hooks on the top, hook onto a pin that will be revealed once the fabric is cut in step 1. At the bottom of the screen, there is a metal plate with two 1/4-20 tapped holes. These will be used to bolt the screen to the black flat bracket on the sofa.

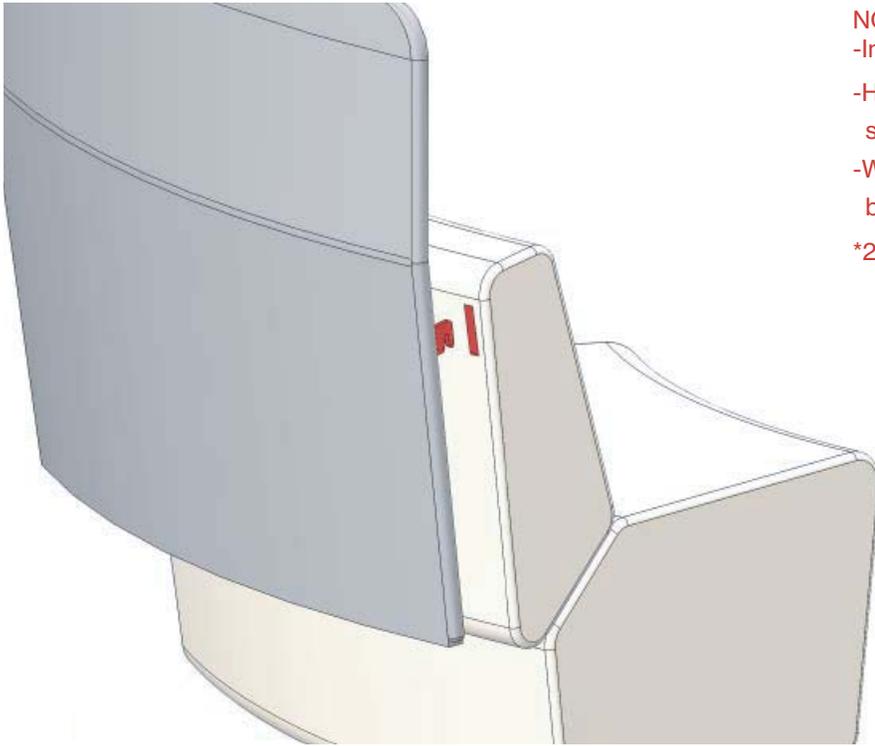

NOTE:

- Install one side first
- Hold onto the one side while installing the second side.
- While holding both sides bolt to bottom bracket
- *2-3 people required to install.

Align the hook from the screen with the slot in the back of the sofa. You should feel the hook engage with the pin when the screen is lowered into position.

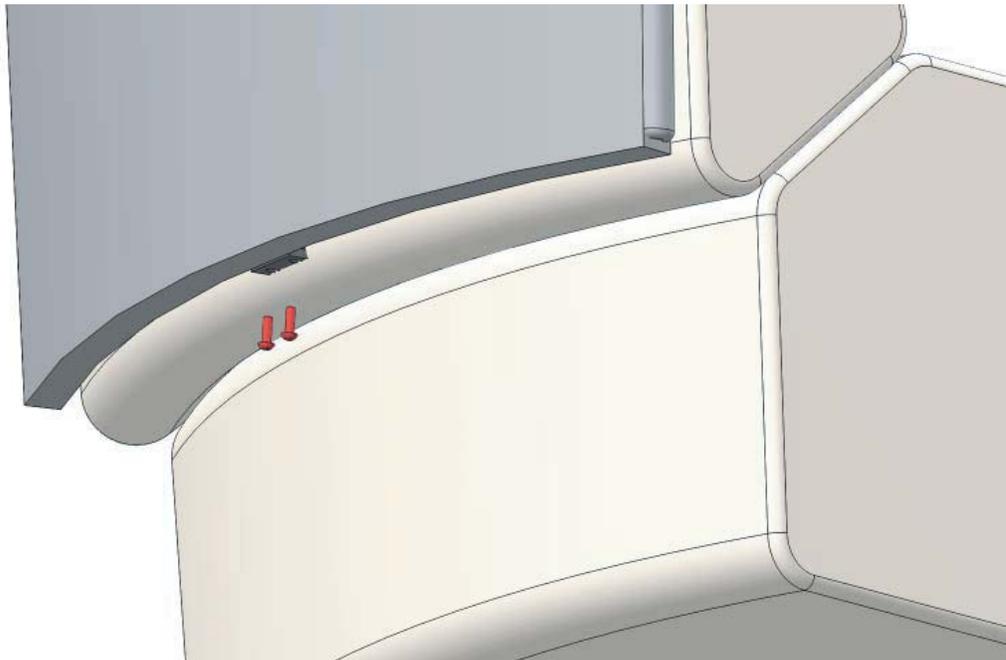

The plate with tapped holes on the screen should rest on the bottom mounting bracket of the sofa. Attach the screen to the sofa with two 1/4-20 x 3/4" bolts.