





ceiling mount bul.it™ 5-slider

your lighting rep has recommended the ceiling mount **bul.it™** fixture for your project Let's take a quick look:



sizes and lumens



- C3312 (12") / 1000 3500 lm
- C3316 (16") / 1600 5000 lm





ceiling mount
bul.it™ 5-slider

construction

integral programmable driver, constant current, field maintainable, input voltage 120-277V, 0-10v controllable, 1% dimming.

single COB LED module in 80+ CRI standard or optional 90 CRI 2700K, 3000K, 3500K, and 4000K

.050" spun aluminum conical reflector finished in high reflectance (>92%) matte white powder coat

mounts to standard 4" octagon junction box

precision CNC spun .063" aluminum parabolic housing with rolled bottom edge for added strength

21 standard powdercoat paint finishes+ custom RAL colors


open bottom, frosted acrylic flat lens, or open with decorative colored ring in amber, blue, frost, green, red, or yellow





performance

Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
ceiling mount bul.it	+	24.2 fc	37.8 fc	15.3 fc	2.5:1	1.6:1

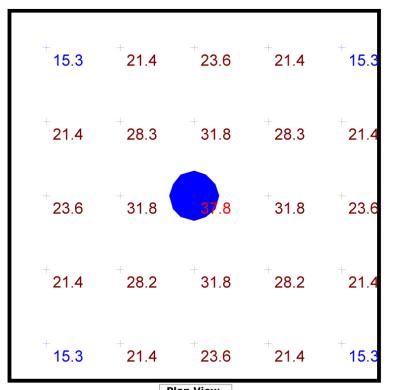



- 80/50/20 reflectances
- bottom of fixture at 12.5' aff
- FC readings at 2.5' aff
- layout conducted using C3316 HI output (3700 delivered lumens)















www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time



