




i.rod.4.hrz™ 5-slider

your lighting rep has
recommended the **i.rod.4.hrz™**
cylinder pendant for your project
Let's take a quick look:



sizes and lumens


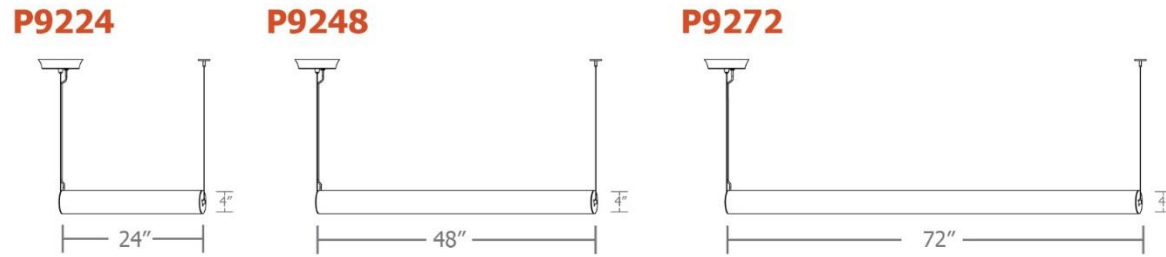


- P9224 (24") / 1200 – 3200 lm (custom lumens)
- P9248 (48") / 2400 – 6450 lm (custom lumens)
- P9272 (72") / 3600 – 9100 lm (custom lumens)



construction

canopy mounted driver, constant current,
field maintainable, universal input (120-
277v), 0-10v controllable to 1% dimming.

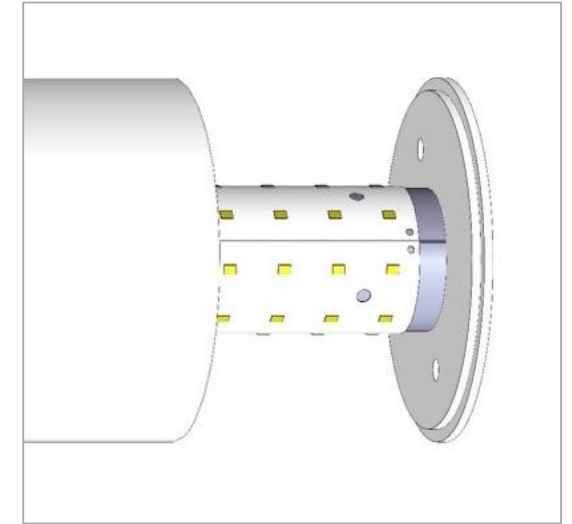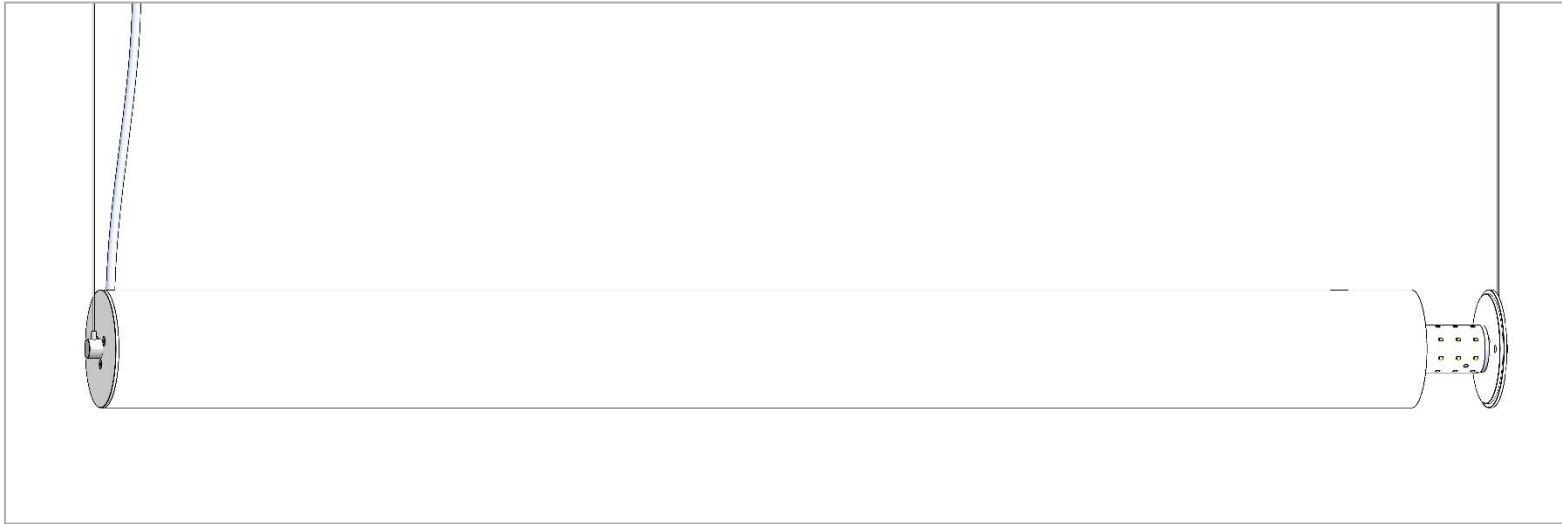

.100" thick aluminum end
cap in matte white


mounts to 7.7" dia. spun aluminum driver
canopy in matte white finish. two 3ft/6ft
stainless steel cables with field adjustable
grippers allowing for exact desired
mounting height. non power feed leg has
2" matte white canopy.

flexible planar LED
lighting sheet wrapped
around extruded
aluminum core provides
totally even luminance

performance


Statistics

Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
i.rod.4.hrz	+	29.1 fc	41.7 fc	22.0 fc	1.9:1	1.3:1

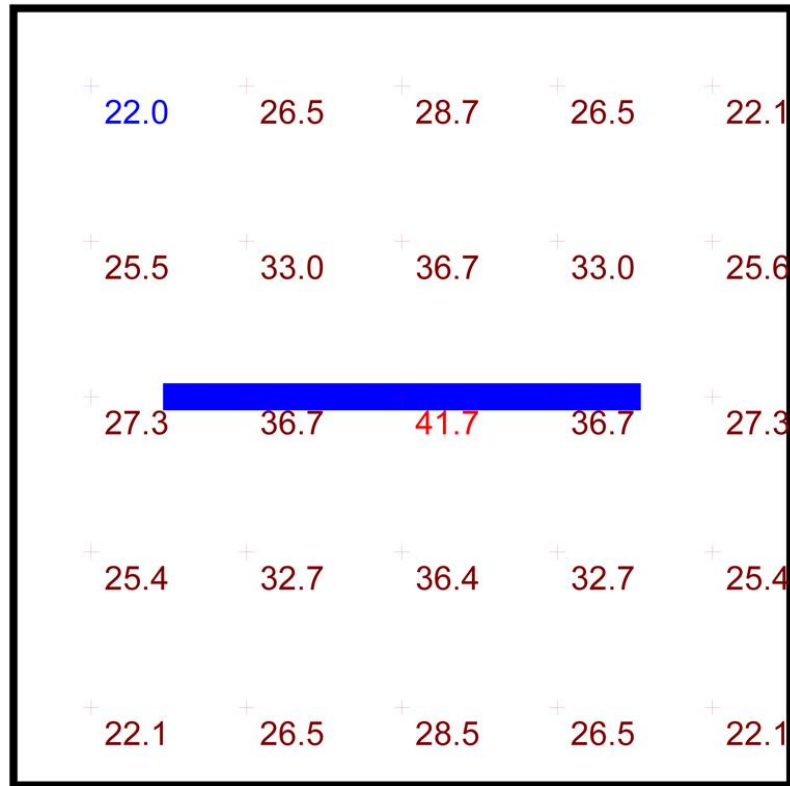

Plan View
Scale - 1" = 2ft

- 10' x 10' x 10'H space
- 80/50/20 reflectances
- bottom of fixture at 8' aff
- FC readings at 2.5' aff
- layout conducted using P9272 7500 lumens (HX) output unit

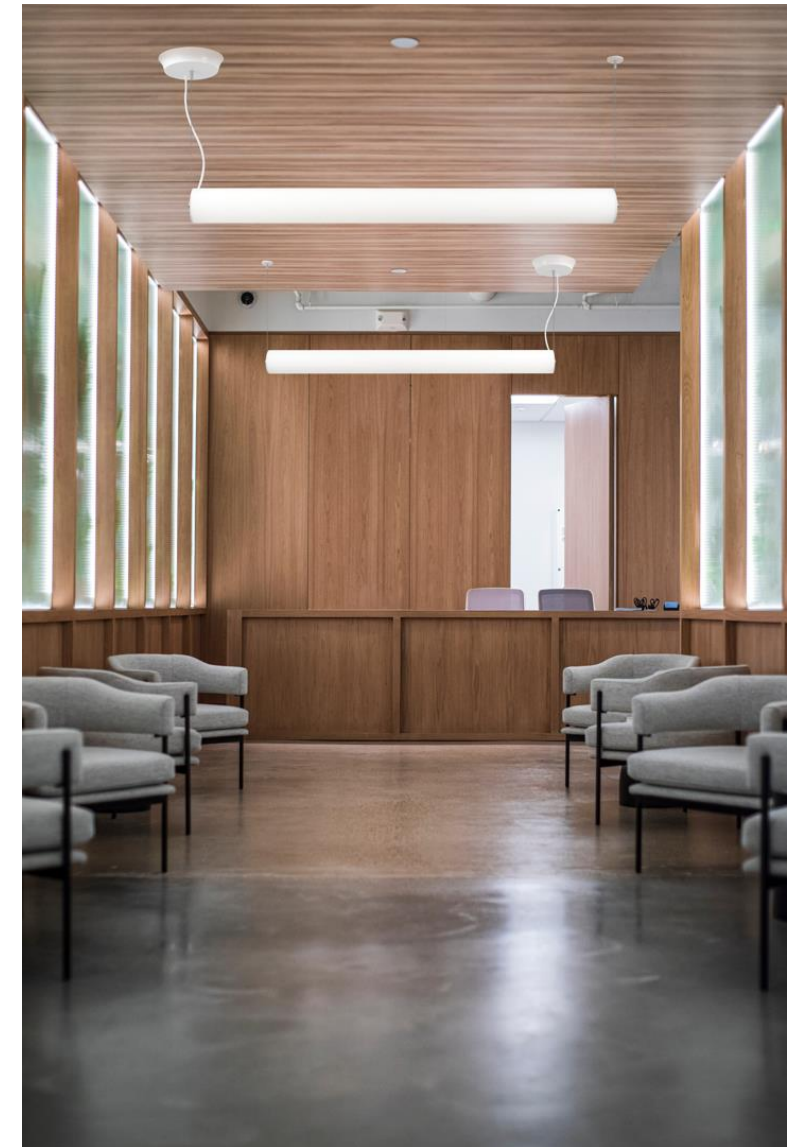



www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

i.rod.4.hrz™ 5-slider

