

mere.ly™ spec sheet

driver housing / power head

extruded aluminum with silver anodized or black anodized finish, acts as heat sink as well. also available in painted finishes listed below.

diffuser

6" dia. .100" virgin clear acrylic cylinder. (other lengths available upon request) secondary diffuser over COB; 4" dia. white acrylic dome.

decorative film

flexible film rests on clear acrylic ledge bonded to bottom of cylinder. choose from 4 patterns listed below.

LED module

COB array in 2700K, 3000K, 3500K, or 4000K. (call factory for 5000K) (80+ cri standard) optional 90cri (see below). under normal operating conditions, the LEDs employed are rated for >50,000hrs L70 (6.8K) per IES TM-21 from LM-80 test data.

integral, programmable, UL class P, class 2, universal input (120-277v), constant current, 0-10v dimming, 1% minimum dimming level, PF >.9, THD <20%, protections include open and short circuit, overload and over temperature.

5" dia. spun steel canopy in satin white with single or dual stainless steel cables and field adjustable grippers that allow for exact AFF mounting heights.

premium mountings

colored cloth cord (optional)

extruded aluminum canopy painted to match fixture, ultrathin vertical stainless steel cable and field adjustable gripper that allow for exact AFF mounting heights. cloth-covered power cord color options listed below. cord requires special stripping tool (link). power over cable (optional)

extruded aluminum canopy painted to match fixture. Class 2 LED powered suspension system that suspends and powers the fixture with thin stainless steel copper-core conductive cables, providing a clean look without the need for a separate power cord. powered suspension requires cable cutter (link) specifically designed to cut stainless steel aircraft cable from 1/32" to 1/8".

recommend use of inverter (by other). optional WREM: wired for remote EM battery (by other). if using WHPC, SBPC, or BKPC cords, 2nd power cord required.



catalog number

Size P9912	decorative film	CCT 27 2700K	lumens FX 1625 lm	powerhead finish	power cord WHPC white power cord	O 3FT	ptions 36" cable
6"dia X 12"ht	AB Aurora Borealis CB Crapherry	30 3000K	LO 2325 lm	AN silver anodized ANB anodized black	and cánopy BKPC black power cord	6FT	72" cable

P9924

6"dia X 24"ht

CS California Sunset

CB Cranberry

NY New York velvet

35 3500K

40 4000K

CL*xxxx Im custom lumens consult factory

painted finish

BN brown BR brick red

BS brass

BU blue ΒZ bronze

CP champagne

GM gun metal GR green

MB military blue

MN mint MW matte white

OR orange

PLpurple RD red

SS satin silver

TG textured gray TW textured white

YO yellow

premium finish

RAL specify RAL#

and canopy

SBPC silver braid power cord 90CRI

and white canopy

premium

(driver canopy required) (not available w/ 12ft option)

BUPC blue cloth cord

ORPC orange cloth cord

PLPC purple cloth cord RDPC red cloth cord

WGPC white & gray dot cloth cord

POC power over cable **12FT** 144" cable*

VHS 2-point vertical hanging system

> wired for remote EM battery pack (by other) (see note above)

> > *not available with premium power cords




WREM








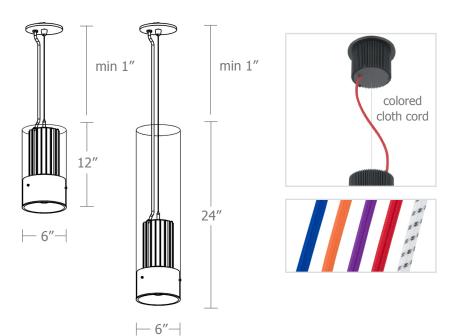







Cat No	Delivered Lumens*	120V / 277V	120V	277V	
P9912 FX	1625	14	.12	.05	
P9912 LO	2325	20	.17	.07	
P9924 FX	1625	14	.12	.05	
		ies file # 1	9347		
P9924 LO	2325	20	.17	.07	
		ies file # 1	19346		

Watts

Amps



^{*}delivered lumens based on 4000K, 80+ cri (90cri multiplier .83)

Powder Coat Paint Finishes



For accurate color verification, actual finish samples are available upon request.

Premium Finishes*



RAL#

*Available on select series. Consult product submittal for availability.

Decorative Films

