




wāf.r™ 5-slider

your lighting rep has
recommended the **wāf.r™**
pendant for your project
Let's take a quick look:




sizes and lumens


P5518




P5526



P5538



P5548



- P5518 (18") / 1330 – 4300 lm
- P5526 (26") / 2650 – 10000 lm
- P5538 (38") / 5300 – 20000 lm
- P5548 (48") / 8000 – 30000 lm




construction

5" dia. spun steel canopy with
field adjustable stainless steel
4-point vertical suspension or
quadpod to single point

integral programmable drivers, field
maintainable, universal input (120-277v),
0-10v controllable to 1% dimming.

metal core LED boards with Cree
90 CRI chips, mechanically held in
place for easy maintenance

direct light distribution.
optional 10% up light

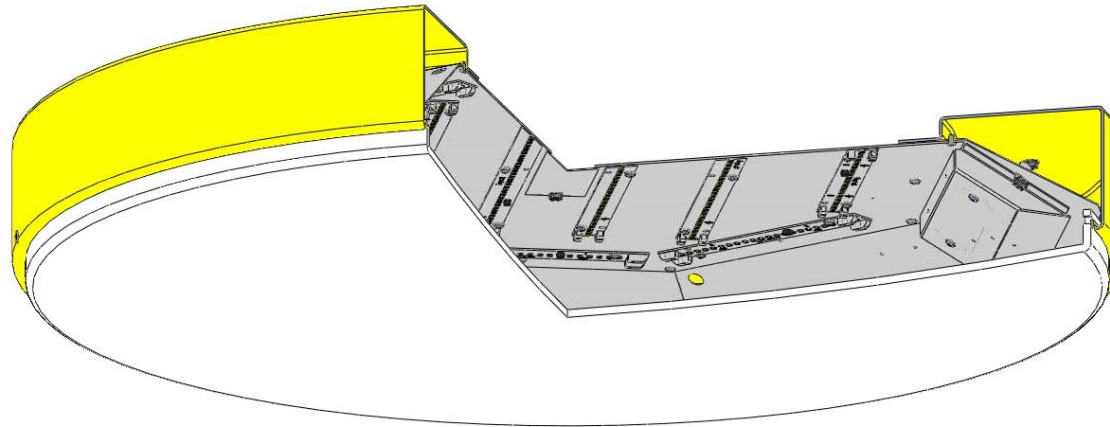

precision CNC spun .063"
aluminum housing w/rolled
bottom edge for added strength

.050" aluminum reflector w/ high
reflectance (>92%) powder coat painted
high reflectance matte white finish


21 standard powder
coat paint finishes
+ custom RAL colors

min .177" non-glare, light matte,
white acrylic diffuser

performance


Statistics

Description	Symbol	Avg	Min	Max/Min	Avg/Min	Max
waf.r	+	45.5 fc	27.4 fc	2.9:1	1.7:1	80.8 fc

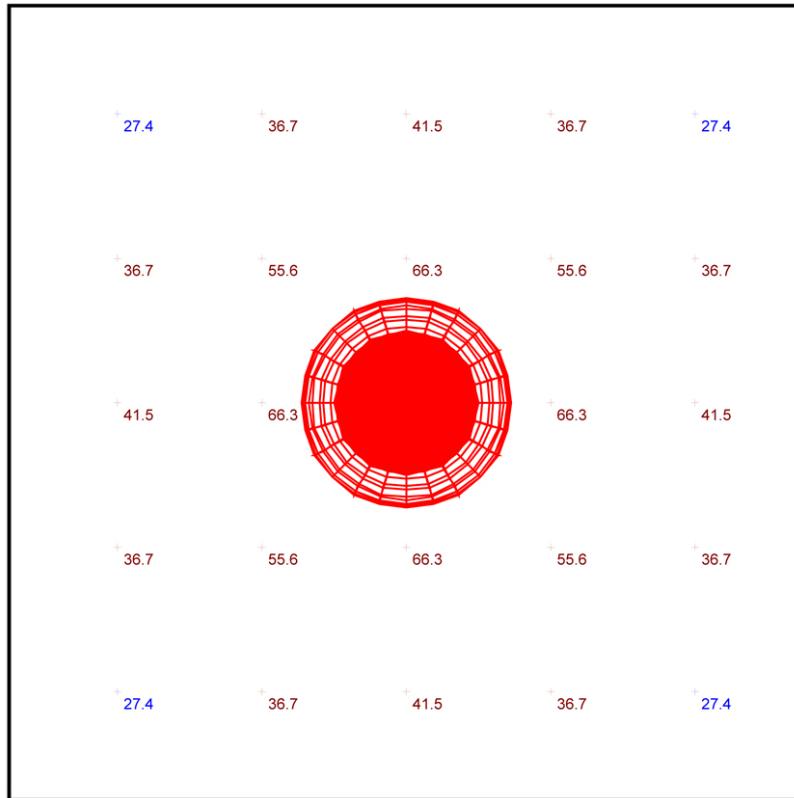

- 22' x 22' x 22'H space
- 80/50/20 reflectances
- bottom of fixture at 14' aff
- FC readings at 2.5' aff
- layout conducted using P5548 HX lumen package (30000 delivered lumens)



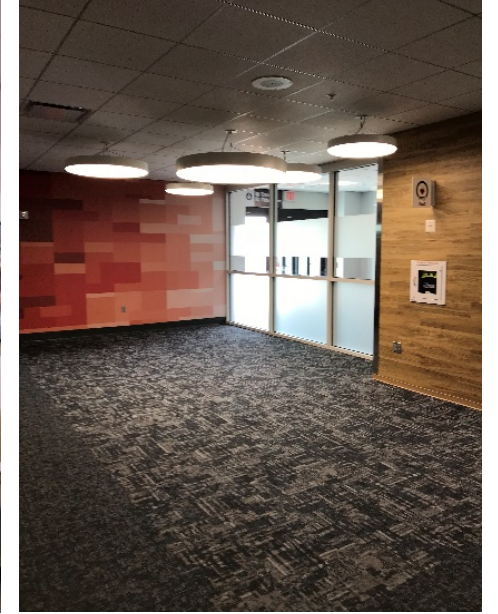

www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

wāf.r™ 5-slider

