




ceiling mount
wāf.r™ 5-slider

your lighting rep has recommended
the ceiling mount **wāf.r™** for
your project
Let's take a quick look:




sizes and lumens


C5518




C5526



C5538

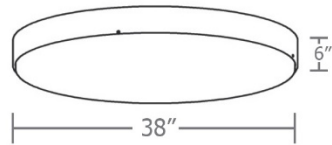

C5548

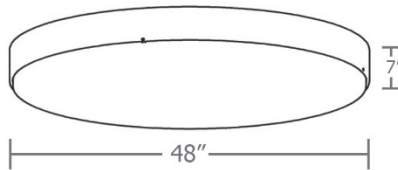

- C5518 (18") / 1330 – 4300 lm
- C5526 (26") / 2650 – 10000 lm
- C5538 (38") / 5300 – 20000 lm
- C5548 (48") / 8000 – 30000 lm



ceiling mount

wāf.r™ 5-slider




construction

direct light distribution

integral programmable drivers, constant current, universal input (120-277v), field maintainable, 0-10v controllable, 1% dimming.

mounts to standard 4-inch octagon junction box

metal core LED boards with 90 CRI Cree chips, mechanically held in place for easy maintenance

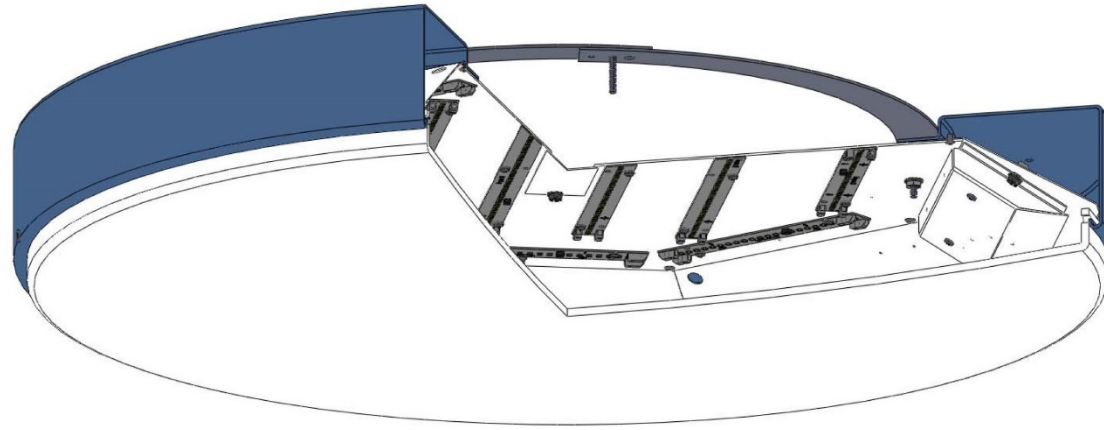

precision CNC spun .063" aluminum housing w/rolled bottom edge for added strength

.050" aluminum reflector w/ high reflectance (>92%) powder coat paint matte white finish

21 standard powder coat paint finishes + custom RAL colors

.177" optix® NG LM white acrylic lens


ceiling mount

wāf.r™ 5-slider



performance

| Statistics | | | | | | |
|---------------|--------|---------|---------|---------|---------|---------|
| Description | Symbol | Avg | Min | Max/Min | Avg/Min | Max |
| ceiling waf.r | + | 49.6 fc | 30.9 fc | 2.8:1 | 1.6:1 | 86.1 fc |

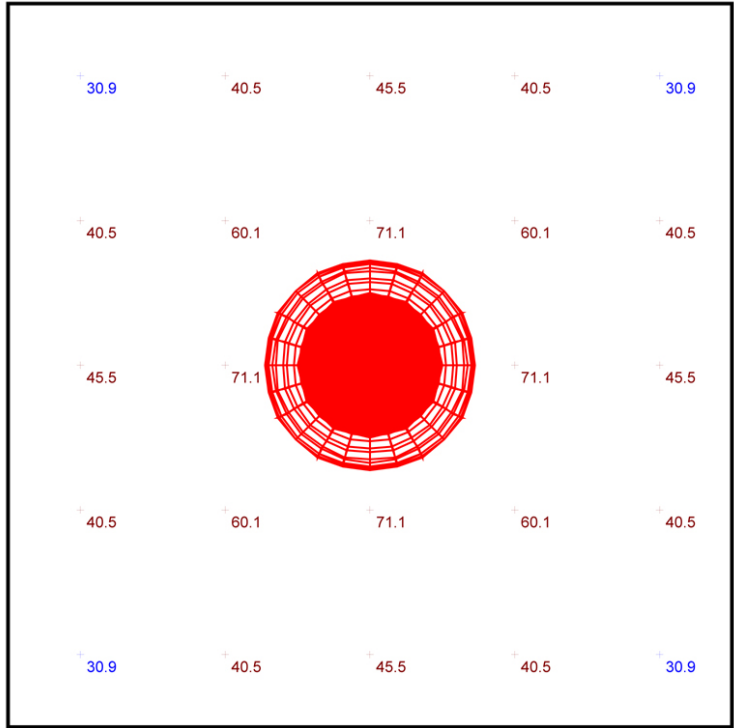

Plan View
Scale - 1" = 4ft

- 20' x 20' x 14'H space
- 80/50/20 reflectances
- bottom of fixture at 14' aff
- FC readings at 2.5' aff
- layout conducted using C5548 HX lumen (30000 delivered lumens)

ceiling mount

wāf.r™ 5-slider





www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

ceiling mount

wāf.r™ 5-slider

