



IES INDOOR REPORT

PHOTOMETRIC FILENAME : 4CRDI-L12-835U-L12-835D-XXX-DIM1-UNV-LW-CSU-OM-CSD-WM_.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] GEN from UL #13537338.10 and #13131414.06

[TESTLAB]

[ISSUE DATE] 10-FEB-2021

[MANUFAC] WILLIAMS INDOOR

[MORE] H E Williams Inc. - Carthage, MO

[LUMCAT] 4CRDI-L12-835U-L12-835D-xxx-DIM1-UNV-LW-CSU-OM-CSD-WM

[MORE]

[LUMINAIRE] White formed aluminum housing, wide distrib white painted flush prismatic lens trim up,

[MORE] medium distrib anodized alum open reflector trim down

[LAMP] Two white LEDs (one up/one down)

[_SEARCH_SOURCETYPE] LED

[_SEARCH_APPLICATION] INDOOR, DIRECT, INDIRECT

[_SEARCH_MOUNTING] WALL

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	2622
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	92
Total Luminaire Watts	28.5
Ballast Factor	1.00
CIE Type	General Diffuse
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Circular w/ Sides
Luminous Length (0-180)	0.31 ft (Diameter)
Luminous Width (90-270)	0.31 ft (Diameter)
Luminous Height	1.44 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	544	544	544
55	120	120	120
65	27	27	27
75	7	7	7
85	1	1	1

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 4CRDI-L12-835U-L12-835D-XXX-DIM1-UNV-LW-CSU-OM-CSD-WM_IES

CANDELA TABULATION

	<u>0.0</u>	<u>22.5</u>	<u>45.0</u>	<u>67.5</u>	<u>90.0</u>	<u>112.5</u>	<u>135.0</u>	<u>157.5</u>	<u>180.0</u>	<u>202.5</u>
0.0	2761.955	2761.955	2761.955	2761.955	2761.955	2761.955	2761.955	2761.955	2761.955	2761.955
2.5	2756.845	2756.845	2756.845	2756.845	2756.845	2756.845	2756.845	2756.845	2756.845	2756.845
5.0	2714.943	2714.943	2714.943	2714.943	2714.943	2714.943	2714.943	2714.943	2714.943	2714.943
7.5	2592.814	2592.814	2592.814	2592.814	2592.814	2592.814	2592.814	2592.814	2592.814	2592.814
10.0	2386.881	2386.881	2386.881	2386.881	2386.881	2386.881	2386.881	2386.881	2386.881	2386.881
12.5	2134.447	2134.447	2134.447	2134.447	2134.447	2134.447	2134.447	2134.447	2134.447	2134.447
15.0	1885.590	1885.590	1885.590	1885.590	1885.590	1885.590	1885.590	1885.590	1885.590	1885.590
17.5	1649.508	1649.508	1649.508	1649.508	1649.508	1649.508	1649.508	1649.508	1649.508	1649.508
20.0	1414.448	1414.448	1414.448	1414.448	1414.448	1414.448	1414.448	1414.448	1414.448	1414.448
22.5	1154.860	1154.860	1154.860	1154.860	1154.860	1154.860	1154.860	1154.860	1154.860	1154.860
25.0	855.925	855.925	855.925	855.925	855.925	855.925	855.925	855.925	855.925	855.925
27.5	541.149	541.149	541.149	541.149	541.149	541.149	541.149	541.149	541.149	541.149
30.0	284.934	284.934	284.934	284.934	284.934	284.934	284.934	284.934	284.934	284.934
32.5	129.027	129.027	129.027	129.027	129.027	129.027	129.027	129.027	129.027	129.027
35.0	63.160	63.160	63.160	63.160	63.160	63.160	63.160	63.160	63.160	63.160
37.5	42.157	42.157	42.157	42.157	42.157	42.157	42.157	42.157	42.157	42.157
40.0	31.426	31.426	31.426	31.426	31.426	31.426	31.426	31.426	31.426	31.426
42.5	24.375	24.375	24.375	24.375	24.375	24.375	24.375	24.375	24.375	24.375
45.0	18.856	18.856	18.856	18.856	18.856	18.856	18.856	18.856	18.856	18.856
47.5	13.950	13.950	13.950	13.950	13.950	13.950	13.950	13.950	13.950	13.950
50.0	10.067	10.067	10.067	10.067	10.067	10.067	10.067	10.067	10.067	10.067
52.5	6.745	6.745	6.745	6.745	6.745	6.745	6.745	6.745	6.745	6.745
55.0	4.599	4.599	4.599	4.599	4.599	4.599	4.599	4.599	4.599	4.599
57.5	3.066	3.066	3.066	3.066	3.066	3.066	3.066	3.066	3.066	3.066
60.0	2.146	2.146	2.146	2.146	2.146	2.146	2.146	2.146	2.146	2.146
62.5	1.584	1.584	1.584	1.584	1.584	1.584	1.584	1.584	1.584	1.584
65.0	1.124	1.124	1.124	1.124	1.124	1.124	1.124	1.124	1.124	1.124
67.5	0.818	0.818	0.818	0.818	0.818	0.818	0.818	0.818	0.818	0.818
70.0	0.613	0.613	0.613	0.613	0.613	0.613	0.613	0.613	0.613	0.613
72.5	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460	0.460
75.0	0.307	0.307	0.307	0.307	0.307	0.307	0.307	0.307	0.307	0.307
77.5	0.204	0.204	0.204	0.204	0.204	0.204	0.204	0.204	0.204	0.204
80.0	0.153	0.153	0.153	0.153	0.153	0.153	0.153	0.153	0.153	0.153
82.5	0.102	0.102	0.102	0.102	0.102	0.102	0.102	0.102	0.102	0.102
85.0	0.051	0.051	0.051	0.051	0.051	0.051	0.051	0.051	0.051	0.051
87.5	0.051	0.051	0.051	0.051	0.051	0.051	0.051	0.051	0.051	0.051
90.0	2.395	2.395	2.395	2.395	2.395	2.395	2.395	2.395	2.395	2.395
92.5	2.824	2.824	2.824	2.824	2.824	2.824	2.824	2.824	2.824	2.824
95.0	4.789	4.789	4.789	4.789	4.789	4.789	4.789	4.789	4.789	4.789
97.5	7.798	7.798	7.798	7.798	7.798	7.798	7.798	7.798	7.798	7.798
100.0	11.850	11.850	11.850	11.850	11.850	11.850	11.850	11.850	11.850	11.850
102.5	16.332	16.332	16.332	16.332	16.332	16.332	16.332	16.332	16.332	16.332
105.0	21.244	21.244	21.244	21.244	21.244	21.244	21.244	21.244	21.244	21.244
107.5	26.525	26.525	26.525	26.525	26.525	26.525	26.525	26.525	26.525	26.525
110.0	32.296	32.296	32.296	32.296	32.296	32.296	32.296	32.296	32.296	32.296
112.5	38.498	38.498	38.498	38.498	38.498	38.498	38.498	38.498	38.498	38.498
115.0	45.129	45.129	45.129	45.129	45.129	45.129	45.129	45.129	45.129	45.129
117.5	52.129	52.129	52.129	52.129	52.129	52.129	52.129	52.129	52.129	52.129
120.0	59.128	59.128	59.128	59.128	59.128	59.128	59.128	59.128	59.128	59.128
122.5	65.882	65.882	65.882	65.882	65.882	65.882	65.882	65.882	65.882	65.882
125.0	72.145	72.145	72.145	72.145	72.145	72.145	72.145	72.145	72.145	72.145
127.5	78.285	78.285	78.285	78.285	78.285	78.285	78.285	78.285	78.285	78.285
130.0	84.978	84.978	84.978	84.978	84.978	84.978	84.978	84.978	84.978	84.978
132.5	93.267	93.267	93.267	93.267	93.267	93.267	93.267	93.267	93.267	93.267

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 4CRDI-L12-835U-L12-835D-XXX-DIM1-UNV-LW-CSU-OM-CSD-WM_IES

CANDELA TABULATION - (Cont.)

135.0	104.564	104.564	104.564	104.564	104.564	104.564	104.564	104.564	104.564	104.564
137.5	120.160	120.160	120.160	120.160	120.160	120.160	120.160	120.160	120.160	120.160
140.0	141.957	141.957	141.957	141.957	141.957	141.957	141.957	141.957	141.957	141.957
142.5	173.087	173.087	173.087	173.087	173.087	173.087	173.087	173.087	173.087	173.087
145.0	217.417	217.417	217.417	217.417	217.417	217.417	217.417	217.417	217.417	217.417
147.5	282.194	282.194	282.194	282.194	282.194	282.194	282.194	282.194	282.194	282.194
150.0	381.908	381.908	381.908	381.908	381.908	381.908	381.908	381.908	381.908	381.908
152.5	528.286	528.286	528.286	528.286	528.286	528.286	528.286	528.286	528.286	528.286
155.0	728.818	728.818	728.818	728.818	728.818	728.818	728.818	728.818	728.818	728.818
157.5	979.330	979.330	979.330	979.330	979.330	979.330	979.330	979.330	979.330	979.330
160.0	1254.402	1254.402	1254.402	1254.402	1254.402	1254.402	1254.402	1254.402	1254.402	1254.402
162.5	1523.334	1523.334	1523.334	1523.334	1523.334	1523.334	1523.334	1523.334	1523.334	1523.334
165.0	1762.794	1762.794	1762.794	1762.794	1762.794	1762.794	1762.794	1762.794	1762.794	1762.794
167.5	1956.204	1956.204	1956.204	1956.204	1956.204	1956.204	1956.204	1956.204	1956.204	1956.204
170.0	2094.968	2094.968	2094.968	2094.968	2094.968	2094.968	2094.968	2094.968	2094.968	2094.968
172.5	2183.998	2183.998	2183.998	2183.998	2183.998	2183.998	2183.998	2183.998	2183.998	2183.998
175.0	2230.662	2230.662	2230.662	2230.662	2230.662	2230.662	2230.662	2230.662	2230.662	2230.662
177.5	2246.012	2246.012	2246.012	2246.012	2246.012	2246.012	2246.012	2246.012	2246.012	2246.012
180.0	2249.000	2249.000	2249.000	2249.000	2249.000	2249.000	2249.000	2249.000	2249.000	2249.000

Vert. Angles Horizontal Angles

	<u>225.0</u>	<u>247.5</u>	<u>270.0</u>	<u>292.5</u>	<u>315.0</u>	<u>337.5</u>	<u>360.0</u>
0.0	2761.955	2761.955	2761.955	2761.955	2761.955	2761.955	2761.955
2.5	2756.845	2756.845	2756.845	2756.845	2756.845	2756.845	2756.845
5.0	2714.943	2714.943	2714.943	2714.943	2714.943	2714.943	2714.943
7.5	2592.814	2592.814	2592.814	2592.814	2592.814	2592.814	2592.814
10.0	2386.881	2386.881	2386.881	2386.881	2386.881	2386.881	2386.881
12.5	2134.447	2134.447	2134.447	2134.447	2134.447	2134.447	2134.447
15.0	1885.590	1885.590	1885.590	1885.590	1885.590	1885.590	1885.590
17.5	1649.508	1649.508	1649.508	1649.508	1649.508	1649.508	1649.508
20.0	1414.448	1414.448	1414.448	1414.448	1414.448	1414.448	1414.448
22.5	1154.860	1154.860	1154.860	1154.860	1154.860	1154.860	1154.860
25.0	855.925	855.925	855.925	855.925	855.925	855.925	855.925
27.5	541.149	541.149	541.149	541.149	541.149	541.149	541.149
30.0	284.934	284.934	284.934	284.934	284.934	284.934	284.934
32.5	129.027	129.027	129.027	129.027	129.027	129.027	129.027
35.0	63.160	63.160	63.160	63.160	63.160	63.160	63.160
37.5	42.157	42.157	42.157	42.157	42.157	42.157	42.157
40.0	31.426	31.426	31.426	31.426	31.426	31.426	31.426
42.5	24.375	24.375	24.375	24.375	24.375	24.375	24.375
45.0	18.856	18.856	18.856	18.856	18.856	18.856	18.856
47.5	13.950	13.950	13.950	13.950	13.950	13.950	13.950
50.0	10.067	10.067	10.067	10.067	10.067	10.067	10.067
52.5	6.745	6.745	6.745	6.745	6.745	6.745	6.745
55.0	4.599	4.599	4.599	4.599	4.599	4.599	4.599
57.5	3.066	3.066	3.066	3.066	3.066	3.066	3.066
60.0	2.146	2.146	2.146	2.146	2.146	2.146	2.146
62.5	1.584	1.584	1.584	1.584	1.584	1.584	1.584
65.0	1.124	1.124	1.124	1.124	1.124	1.124	1.124
67.5	0.818	0.818	0.818	0.818	0.818	0.818	0.818
70.0	0.613	0.613	0.613	0.613	0.613	0.613	0.613
72.5	0.460	0.460	0.460	0.460	0.460	0.460	0.460
75.0	0.307	0.307	0.307	0.307	0.307	0.307	0.307
77.5	0.204	0.204	0.204	0.204	0.204	0.204	0.204
80.0	0.153	0.153	0.153	0.153	0.153	0.153	0.153

IES INDOOR REPORT**PHOTOMETRIC FILENAME : 4CRDI-L12-835U-L12-835D-XXX-DIM1-UNV-LW-CSU-OM-CSD-WM_.IES****CANDELA TABULATION - (Cont.)**

82.5	0.102	0.102	0.102	0.102	0.102	0.102	0.102
85.0	0.051	0.051	0.051	0.051	0.051	0.051	0.051
87.5	0.051	0.051	0.051	0.051	0.051	0.051	0.051
90.0	2.395	2.395	2.395	2.395	2.395	2.395	2.395
92.5	2.824	2.824	2.824	2.824	2.824	2.824	2.824
95.0	4.789	4.789	4.789	4.789	4.789	4.789	4.789
97.5	7.798	7.798	7.798	7.798	7.798	7.798	7.798
100.0	11.850	11.850	11.850	11.850	11.850	11.850	11.850
102.5	16.332	16.332	16.332	16.332	16.332	16.332	16.332
105.0	21.244	21.244	21.244	21.244	21.244	21.244	21.244
107.5	26.525	26.525	26.525	26.525	26.525	26.525	26.525
110.0	32.296	32.296	32.296	32.296	32.296	32.296	32.296
112.5	38.498	38.498	38.498	38.498	38.498	38.498	38.498
115.0	45.129	45.129	45.129	45.129	45.129	45.129	45.129
117.5	52.129	52.129	52.129	52.129	52.129	52.129	52.129
120.0	59.128	59.128	59.128	59.128	59.128	59.128	59.128
122.5	65.882	65.882	65.882	65.882	65.882	65.882	65.882
125.0	72.145	72.145	72.145	72.145	72.145	72.145	72.145
127.5	78.285	78.285	78.285	78.285	78.285	78.285	78.285
130.0	84.978	84.978	84.978	84.978	84.978	84.978	84.978
132.5	93.267	93.267	93.267	93.267	93.267	93.267	93.267
135.0	104.564	104.564	104.564	104.564	104.564	104.564	104.564
137.5	120.160	120.160	120.160	120.160	120.160	120.160	120.160
140.0	141.957	141.957	141.957	141.957	141.957	141.957	141.957
142.5	173.087	173.087	173.087	173.087	173.087	173.087	173.087
145.0	217.417	217.417	217.417	217.417	217.417	217.417	217.417
147.5	282.194	282.194	282.194	282.194	282.194	282.194	282.194
150.0	381.908	381.908	381.908	381.908	381.908	381.908	381.908
152.5	528.286	528.286	528.286	528.286	528.286	528.286	528.286
155.0	728.818	728.818	728.818	728.818	728.818	728.818	728.818
157.5	979.330	979.330	979.330	979.330	979.330	979.330	979.330
160.0	1254.402	1254.402	1254.402	1254.402	1254.402	1254.402	1254.402
162.5	1523.334	1523.334	1523.334	1523.334	1523.334	1523.334	1523.334
165.0	1762.794	1762.794	1762.794	1762.794	1762.794	1762.794	1762.794
167.5	1956.204	1956.204	1956.204	1956.204	1956.204	1956.204	1956.204
170.0	2094.968	2094.968	2094.968	2094.968	2094.968	2094.968	2094.968
172.5	2183.998	2183.998	2183.998	2183.998	2183.998	2183.998	2183.998
175.0	2230.662	2230.662	2230.662	2230.662	2230.662	2230.662	2230.662
177.5	2246.012	2246.012	2246.012	2246.012	2246.012	2246.012	2246.012
180.0	2249.000	2249.000	2249.000	2249.000	2249.000	2249.000	2249.000

IES INDOOR REPORT**PHOTOMETRIC FILENAME : 4CRDI-L12-835U-L12-835D-XXX-DIM1-UNV-LW-CSU-OM-CSD-WM_.IES****ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	771.04	N.A.	29.40
0-30	1148.84	N.A.	43.80
0-40	1207.76	N.A.	46.10
0-60	1227.16	N.A.	46.80
0-80	1228.72	N.A.	46.90
0-90	1229.13	N.A.	46.90
10-90	980.54	N.A.	37.40
20-40	436.72	N.A.	16.70
20-50	451.58	N.A.	17.20
40-70	20.61	N.A.	0.80
60-80	1.56	N.A.	0.10
70-80	0.36	N.A.	0.00
80-90	0.40	N.A.	0.00
90-110	28.85	N.A.	1.10
90-120	73.71	N.A.	2.80
90-130	138.17	N.A.	5.30
90-150	365.06	N.A.	13.90
90-180	1393.12	N.A.	53.10
110-180	1364.28	N.A.	52.00
0-180	2622.25	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	248.59
10-20	522.45
20-30	377.80
30-40	58.92
40-50	14.86
50-60	4.54
60-70	1.21
70-80	0.36
80-90	0.40
90-100	6.13
100-110	22.71
110-120	44.86
120-130	64.46
130-140	82.95
140-150	143.95
150-160	341.48
160-170	477.91
170-180	208.67

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 4CRDI-L12-835U-L12-835D-XXX-DIM1-UNV-LW-CSU-OM-CSD-WM_.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	106	106	106	106	98	98	98	98	82	82	82	67	67	67	53	53	53	47
1	100	96	94	91	92	89	87	85	75	74	72	63	62	61	51	51	50	45
2	93	88	83	80	86	82	78	75	70	67	65	59	57	56	49	48	47	43
3	88	81	75	71	81	75	71	67	65	62	59	56	54	52	47	46	45	41
4	82	74	68	64	77	70	65	61	61	57	54	53	50	48	45	43	42	39
5	78	69	63	58	72	65	60	56	57	53	50	50	47	45	43	41	40	37
6	73	64	58	54	68	61	55	51	54	50	47	47	45	42	41	40	38	36
7	69	60	54	50	65	57	51	48	51	47	44	45	42	40	40	38	36	34
8	66	56	50	46	62	53	48	44	48	44	41	43	40	38	38	36	35	33
9	63	53	47	43	59	50	45	42	46	42	39	41	38	36	37	35	33	31
10	60	50	44	41	56	48	43	39	43	39	37	39	36	34	35	33	32	30

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 4CRDI-L12-835U-L12-835D-XXX-DIM1-UNV-LW-CSU-OM-CSD-WM_.IES

UGR TABLE - CORRECTED

Reflectances

Ceiling Cavity	70	70	50	50	30	70	70	50	50	30
Walls	50	30	50	30	30	50	30	50	30	30
Floor Cavity	20	20	20	20	20	20	20	20	20	20

Room Size UGR Viewed Crosswise


X=2H	Y=2H	3.4	3.4	3.4	3.4	3.4	UGR Viewed Endwise				
	3H	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4
	4H	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4
	6H	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4
	8H	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4
	12H	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4
4H	2H	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4
	3H	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4
	4H	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4
	6H	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4
	8H	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4
	12H	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4
8H	4H	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4
	6H	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4
	8H	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4
	12H	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4
12H	4H	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4
	6H	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4
	8H	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4

Maximum UGR = 3.4

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 4CRDI-L12-835U-L12-835D-XXX-DIM1-UNV-LW-CSU-OM-CSD-WM_.IES

POLAR GRAPH

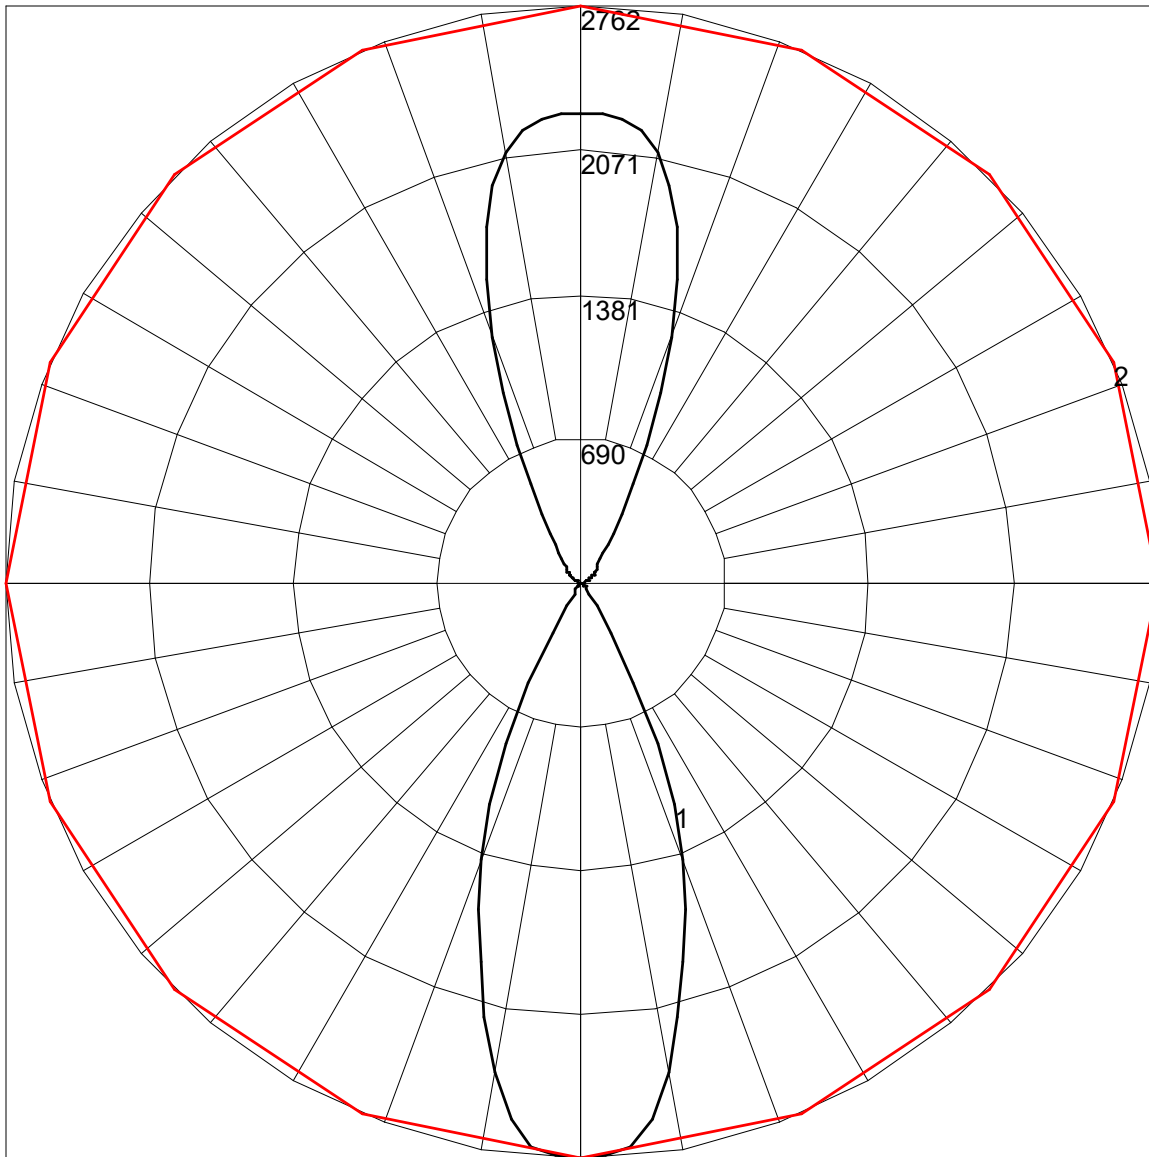

Maximum Candela = 2761.955 Located At Horizontal Angle = 0, Vertical Angle = 0

1 - Vertical Plane Through Horizontal Angles (90 - 270)

2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)